


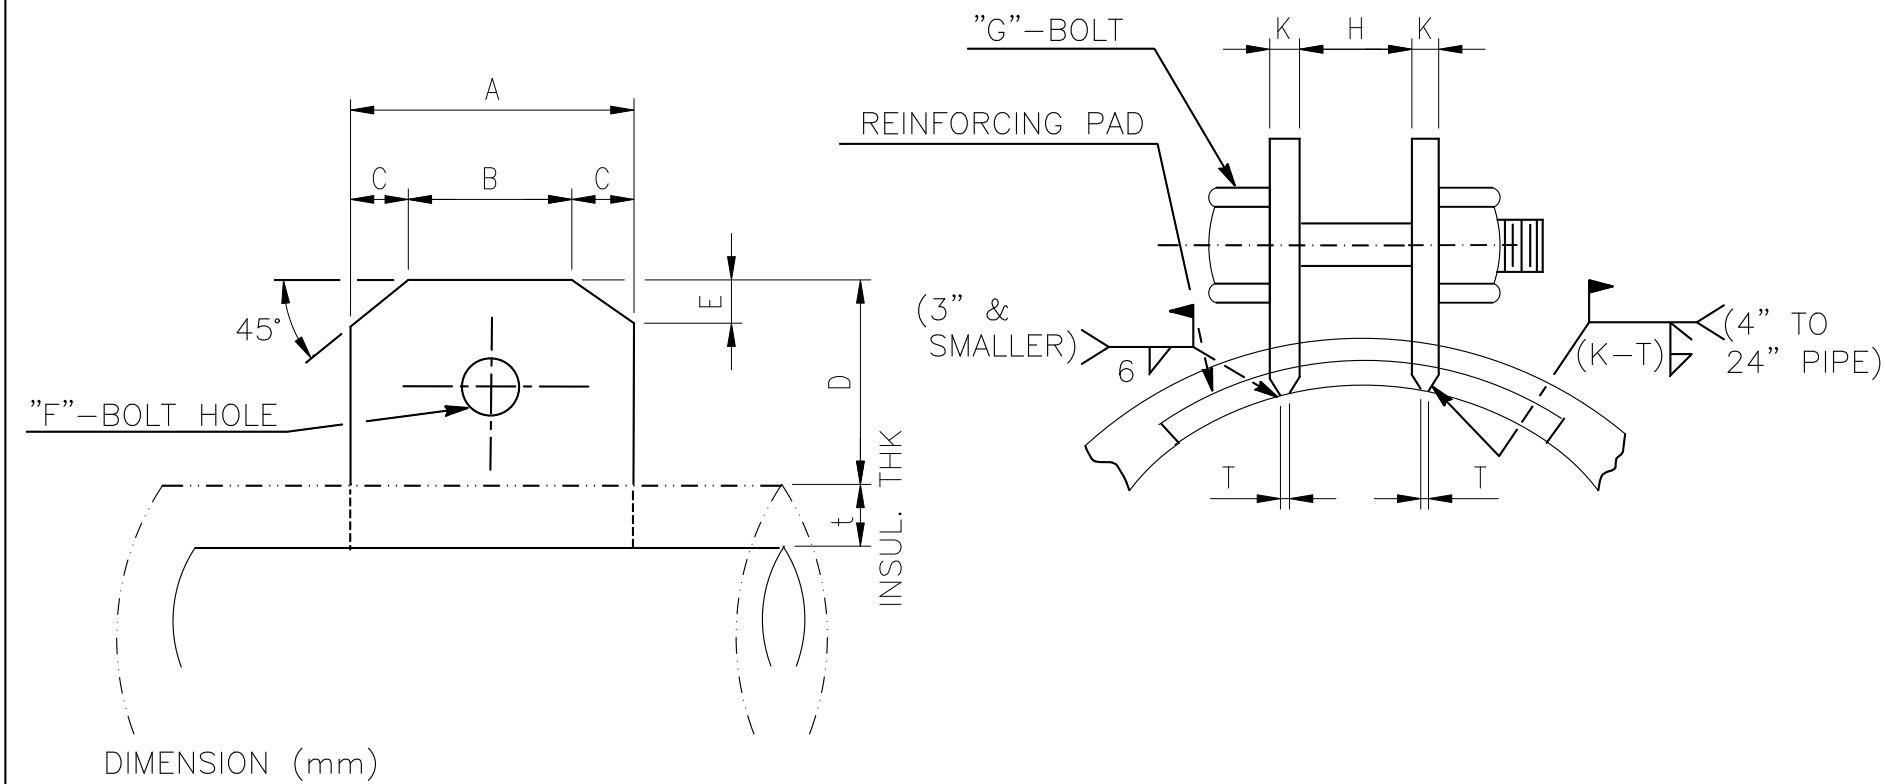


DIMENSION (mm)

TYPE	A	B	C	D	E	F	H	K	T	G	HANGER ROD SIZE
LGP-A-1B	100	50	25	80	25	14	30	6	6	1/2" X 60	3/8"
LGP-A-1 1/2B	100	50	25	80	25	18	30	6	6	5/8" X 70	1/2"
LGP-A-2B	120	60	30	90	30	21	30	6	6	3/4" X 70	5/8"
LGP-A-3B	120	60	30	90	30	21	30	6	6	3/4" X 70	5/8"
LGP-A-4B	130	70	30	90	30	24	40	9	4	7/8" X 90	3/4"
LGP-A-6B	160	90	35	100	35	28	50	9	4	1" X 100	7/8"
LGP-A-8B	160	90	35	100	35	28	50	9	4	1" X 100	7/8"
LGP-A-10B	160	90	35	100	35	28	50	9	4	1" X 100	7/8"
LGP-A-12B	160	90	35	100	35	28	50	9	4	1" X 100	7/8"
LGP-A-14B	160	90	35	100	35	31	50	16	6	1 1/8" X 100	1"
LGP-A-16B	160	90	35	100	35	31	50	16	6	1 1/8" X 100	1"
LGP-A-18B	160	90	35	100	35	31	50	16	6	1 1/8" X 100	1"
LGP-A-20B	180	100	40	110	35	35	55	16	6	1 1/4" X 110	1 1/8"
LGP-A-24B	180	100	40	110	35	35	55	16	6	1 1/4" X 110	1 1/8"

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

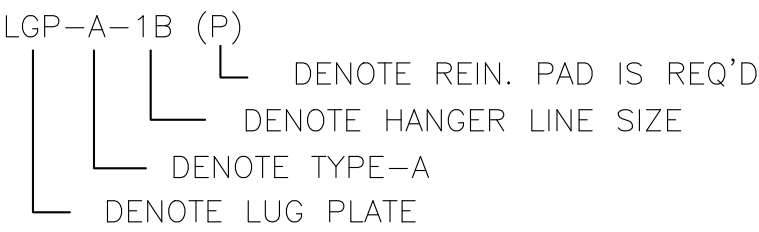

2. MATERIAL : LUG PLATE : CARBON STEEL
BOLT & NUT : A307 GR.B /A563 GR.A
REINFORCING PAD : THE SAME MATERIAL AS THE PIPE

3. REINFORCING PAD TO BE USED ALLOY & LOW ALLOY PIPING

4. THE MINIMUM REINFORCING PAD THICKNESS SHALL NOT BE LESS THAN
THE PIPE WALL THICKNESS

FILE: M-32M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
BY	SHIH		CHK.	YANG		HP6-DSD-A4-500-001	
DATE	7/15/'24		APPR.	CHEN			
LUG PLATE TYPE-A						M-32	
						REV. 1	