


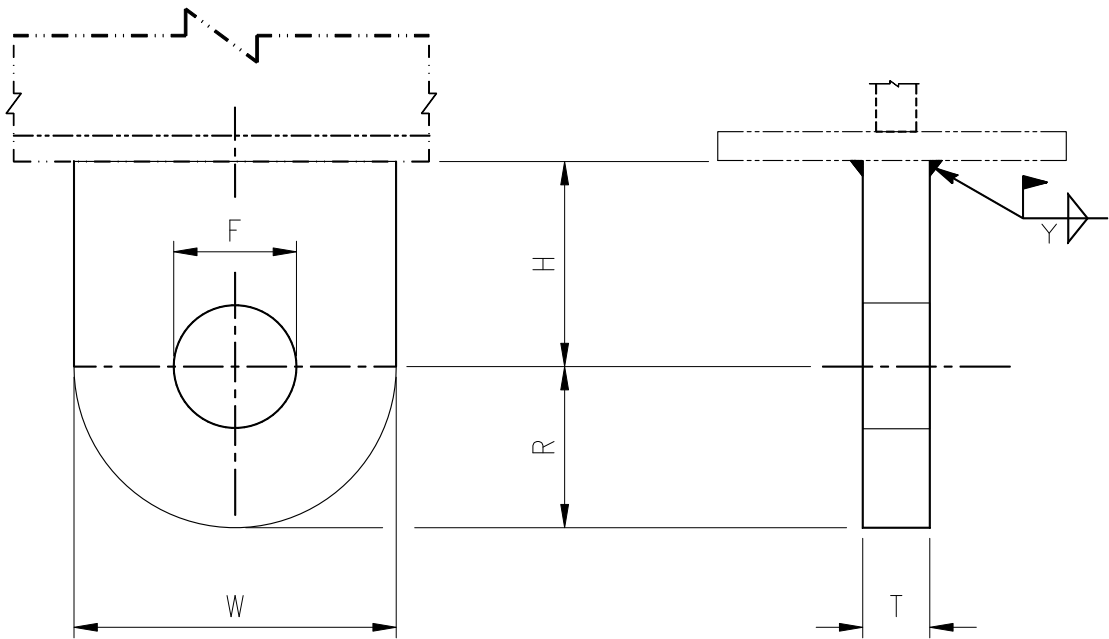

DIMENSION (mm)

TYPE	ROD SIZE	MAX. RECOM. LOAD (Kg)	PIN OR BOLT	F	H	R	T	W	Y
BA-B-1/2	1/2"	510	5/8"	18	38	32	6	64	6
BA-B-5/8	5/8"	820	3/4"	21	38	32	6	64	6
BA-B-3/4	3/4"	1225	7/8"	24	38	32	10	64	6
BA-B-7/8	7/8"	1710	1"	29	51	32	10	64	6
BA-B-1	1"	2250	1 1/8"	32	51	38	13	76	6
BA-B-1 1/4	1 1/4"	3625	1 3/8"	38	76	51	16	102	6
BA-B-1 1/2	1 1/2"	5275	1 5/8"	45	76	64	19	127	10
BA-B-1 3/4	1 3/4"	7120	1 7/8"	51	76	64	19	127	10
BA-B-2	2"	9355	2 1/4"	60	102	76	19	152	10
BA-B-2 1/4	2 1/4"	10430	2 1/2"	67	114	76	19	152	13
BA-B-2 1/2	2 1/2"	13855	2 3/4"	73	114	102	25	203	13
BA-B-2 3/4	2 3/4"	18865	3"	79	114	102	25	203	13
BA-B-3	3"	22905	3 1/4"	86	127	102	25	203	16
BA-B-3 1/4	3 1/4"	27440	3 1/2"	92	127	114	25	229	16
BA-B-3 1/2	3 1/2"	32340	3 3/4"	98	152	114	38	229	16
BA-B-3 3/4	3 3/4"	37600	4"	105	152	114	45	229	16

- NOTES :
- DESIGNATION NUMBER DENOTE AS FOLLOWS :
 BA-B-1/2
 └───┬───┬───
 | | |
 | | └─── DENOTE ROD SIZE
 | └─── DENOTE TYPE-B
 └─── DENOTE BEAM ATTACHMENT
 - MATERIAL: CARBON STEEL
 - REF. GRINNELL FIG. 55 OR EQ.

FILE: M-29M.DWG

中威工程顧問股份有限公司						ENGINEERING STANDARD	
CHUNG WEI ENGINEERING CONSULTING CO., LTD.						BEAM ATTACHMENT	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG			
DATE	7/15/'24		APPR.	CHEN		M-29	REV. 1