


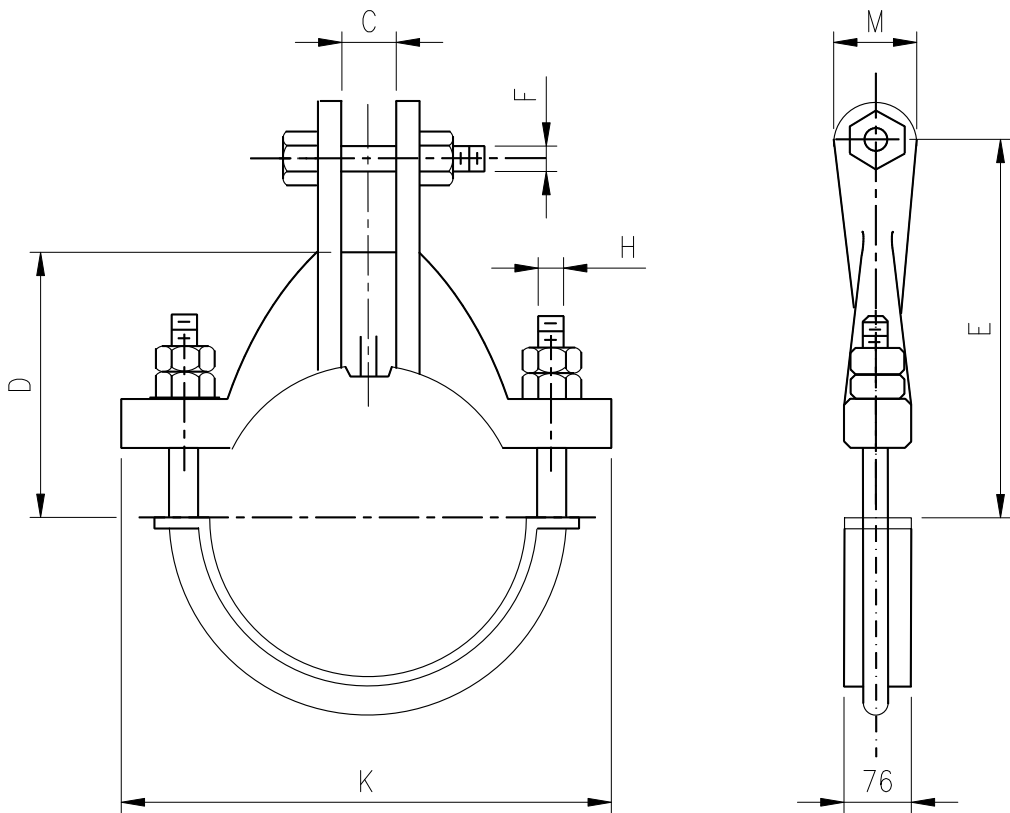


DIMENSIONS (mm)

TYPE	LINE SIZE	USED ON O.D. PIPE SIZE (IN)	MAX. RECOM. LOAD (kg)				C	D	E	F	H	K	M
			950°F	1000°F	1050°F	1075°F							
PCL-G-10B	10"	8?-10?	6120	5340	3560	2775	51	232	305	1 1/2"	1"	391	83
PCL-G-12B	12"	10?-12?	7480	6760	4505	3510	57	273	349	1 5/8"	1 1/4"	454	102
PCL-G-14B	14"	12 ² -14?	7480	6760	4505	3510	57	292	368	1 5/8"	1 1/4"	486	102
PCL-G-16B	16"	14 ² -16?	7480	6760	4505	3510	57	333	416	1 5/8"	1 1/4"	537	102
PCL-G-18B	18"	16?-18?	8615	8345	5560	4340	64	368	464	2"	1 1/4"	613	114
PCL-G-20B	20"	18?-20?	8615	8345	5560	4340	64	400	495	2"	1 1/4"	664	114
PCL-G-24B	24"	20?-24?	11335	10100	6730	5250	76	464	559	2 1/4"	1 3/8"	781	152

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOWS:

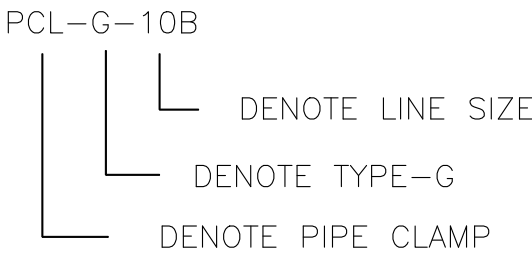

2. MATERIAL: CHROME MOLYBDENUM STEEL, EXCEPT U-BOLT WHICH IS STAINLESS STEEL.

3. REF. GRINNELL FIG. 246 OR EQ.

FILE: M-10M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-10	
DATE	7/15/'24		APPR.	CHEN			
PIPE CLAMP TYPE-G						REV. 1	