


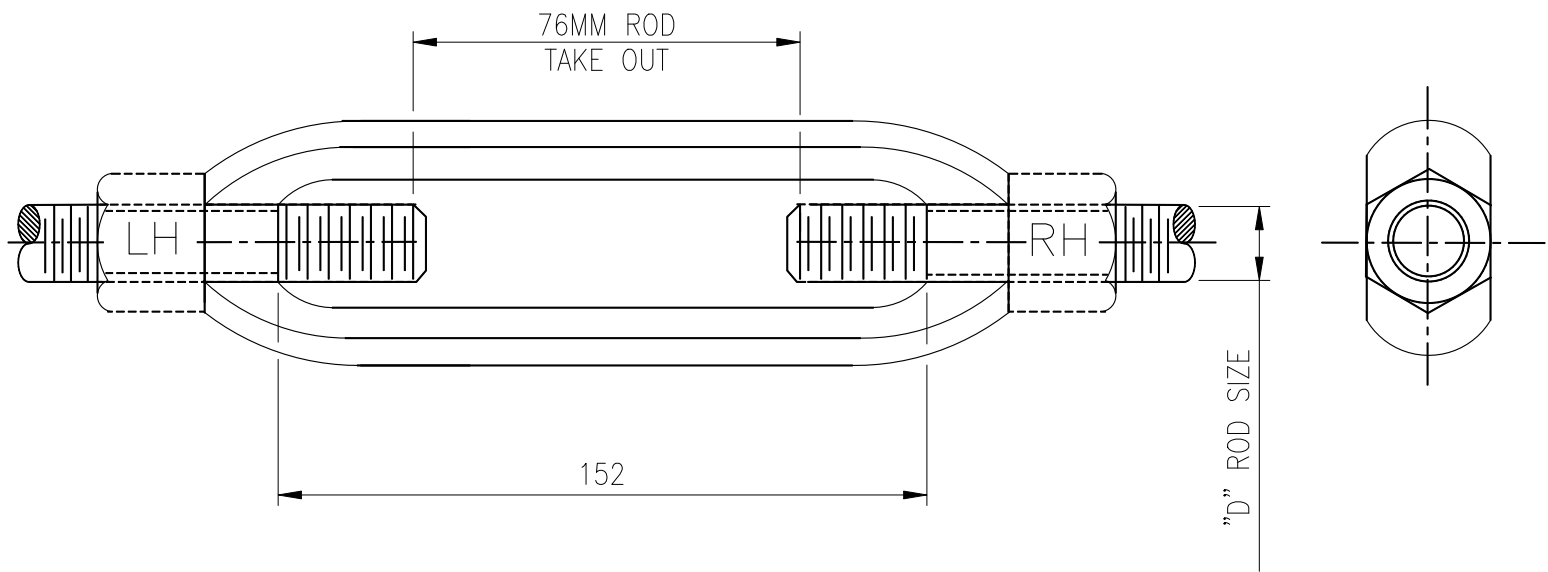

TYPE	D	MAX.RECOM. LOAD (Kg)	
		650°F	750°F
TUB -3/8	3/8	270	240
TUB -1/2	1/2	510	460
TUB -5/8	5/8	820	730
TUB -3/4	3/4	1230	1100
TUB -7/8	7/8	1710	1520
TUB - 1	1	2250	2000
TUB -1 1/4	1 1/4	3630	3240
TUB -1 1/2	1 1/2	5280	4700
TUB -1 3/4	1 3/4	7120	6350
TUB - 2	2	9390	8370
TUB -2 1/4	2 1/4	12430	11000
TUB -2 1/2	2 1/2	15200	13560

NOTES :

1. MATERIAL : FORGE STEEL
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

TUB-3/8

DENOTE DIAMETER OF INTERNAL THREAD "D"

DENOTE TURNBUCKLE
3. REF. GRINNELL FIG. 230 OR EQ.
4. FURNISHED WITH "UNC" THREADS.

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-21	
DATE	7/15/'24		APPR.	CHEN			
TURNBUCKLE						REV. 1	

FILE: M-21M.DWG