


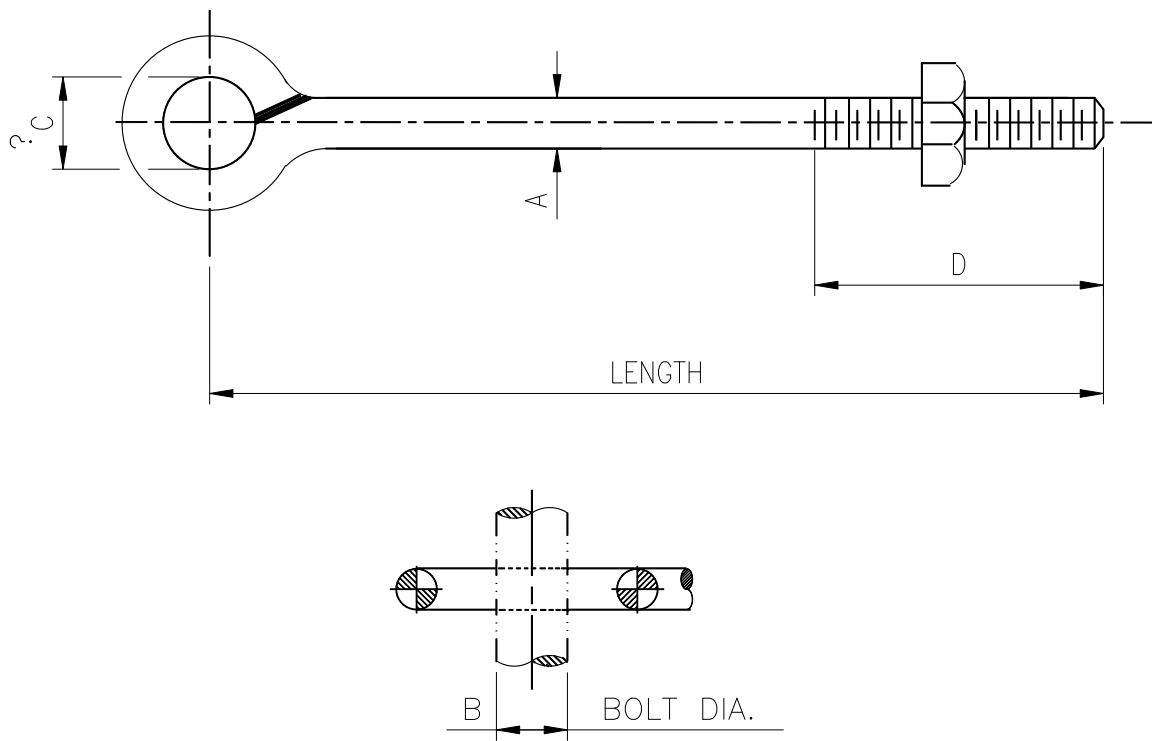

DIMENSION (mm)

TYPE	A	RECOM. "B"	D	MAX.RECOM. LOAD (Kg)		°C
				650°F	750°F	
WERR - 3/8"	3/8"	1/2"	64	270	240	22
WERR - 1/2"	1/2"	5/8"	64	510	460	22
WERR - 5/8"	5/8"	3/4"	64	820	730	22
WERR - 3/4"	3/4"	7/8"	76	1230	1100	32
WERR - 7/8"	7/8"	1"	89	1710	1520	32
WERR - 1"	1"	1 1/8"	102	2250	2000	32
WERR - 1 1/4"	1 1/4"	1 3/8"	127	3630	3240	45
WERR - 1 1/2"	1 1/2"	1 5/8"	152	5280	4700	45
WERR - 1 3/4"	1 3/4"	2"	178	7120	6350	65
WERR - 2"	2"	2 1/4"	203	9390	8370	65
WERR - 2 1/4"	2 1/4"	2 1/2"	229	12430	11000	76
WERR - 2 1/2"	2 1/2"	2 3/4"	254	15200	13560	76

- NOTES :
1. MATERIAL : CARBON STEEL WITH NUT
 2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

WERR-3/8-500

— DENOTE ROD LENGTH

— DENOTE DIM. "A"

— DENOTE W/LH THREAD

— DENOTE WELDED EYE ROD WITH HEX NUT
 3. LENGTH MAY CUT & THREAD TO SUIT IN FIELD .
 4. REF. GRINNELL FIG. 278 & 278L OR EQ.
 5. FURNISHED WITH "UNC" THREADS.
 6. WERR : WELDED EYE ROD W/RIGHT HAND THREAD,
 WERL : WELDED EYE ROD W/LEFT HAND THREAD.

FILE: M-23M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						WELDED EYE ROD	ENGINEERING STANDARD	
							HP6-DSD-A4-500-001	
							M-23	REV. 1
BY	SHIH		CHK.	YANG				
DATE	7/15/'24		APPR.	CHEN				

FILE: M-23M.DWG