


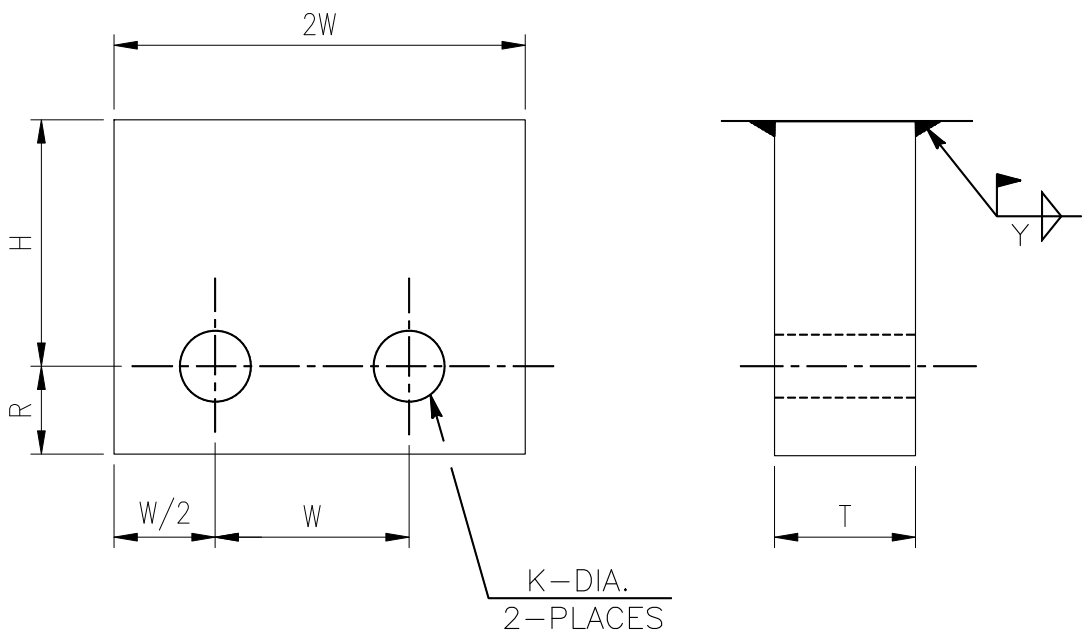


DIMENSIONS (mm)

TYPE	ROD SIZE	MAX. LOAD RATING (kg)	H CONSTANT SUPPORT FRAME SIZES					PIN OR BOLT	K	R	T	W	2W	W/2	Y
			1-9	10-18	19-34	35-49	50-63								
BA-C-1/2	1/2"	510	38	38	51	76	—	5/8"	18	32	10	64	127	32	6
BA-C-5/8	5/8"	820	38	38	51	76	—	3/4"	21	32	10	64	127	32	6
BA-C-3/4	3/4"	1225	—	38	51	76	102	7/8"	24	32	10	64	127	32	6
BA-C-7/8	7/8"	1710	—	38	51	76	102	1"	29	32	10	64	127	32	6
BA-C-1	1"	2250	—	—	51	76	102	1 1/8"	32	38	13	76	152	38	6
BA-C-1 1/4	1 1/4"	3625	—	—	51	76	102	1 3/8"	38	51	16	102	203	51	6
BA-C-1 1/2	1 1/2"	5275	—	—	—	76	102	1 5/8"	45	64	19	127	254	64	6
BA-C-1 3/4	1 3/4"	7120	—	—	—	76	102	1 7/8"	51	64	19	127	254	64	6
BA-C-2	2"	9355	—	—	—	—	102	2 1/4"	60	76	19	152	305	76	10
BA-C-2 1/4	2 1/4"	10430	—	—	—	—	102	2 1/2"	67	76	19	152	305	76	10

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOW:

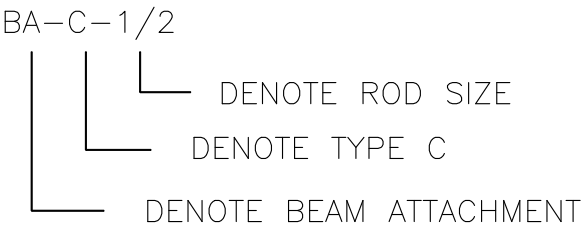

2. MATERIAL: CARBON STEEL

3. REF. GRINNELL FIG. 54 OR EQ.

FILE: M-30M-DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
BY	SHIH		CHK.	YANG		HP6-DSD-A4-500-001	
DATE	7/15/'24		APPR.	CHEN			
BEAM ATTACHMENT TYPE-C						M-30	
						REV. 1	