


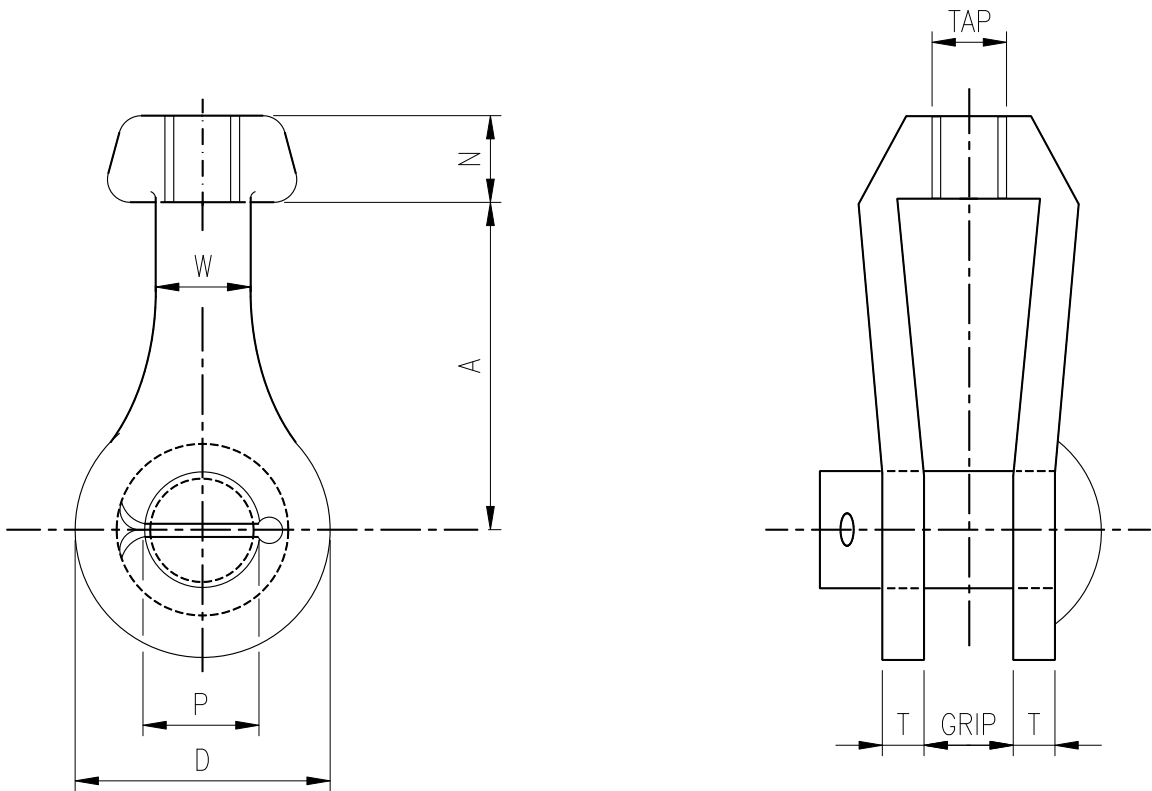

DIMENSIONS (mm)

TYPE	TAP SIZE	A	D	N	PIN SIZE P	T	W	GRIP	MAX.RECOM. LOAD (Kg)	
									650°F	750°F
FSC - 3/8	3/8"	94	37	16	1/2"	8	27	13	270	240
FSC - 1/2	1/2"	94	37	16	5/8"	8	27	13	510	460
FSC - 5/8	5/8"	94	37	16	3/4"	8	27	16	820	730
FSC - 3/4	3/4"	127	51	22	7/8"	10	32	19	1230	1100
FSC - 7/8	7/8"	127	51	22	1"	10	32	22	1710	1520
FSC - 1	1"	127	76	33	1 1/8"	13	38	25	2250	2000
FSC - 1 1/4	1 1/4"	127	76	33	1 3/8"	13	38	32	3630	3240
FSC - 1 1/2	1 1/2"	152	89	41	1 5/8"	13	44	38	5280	4700
FSC - 1 3/4	1 3/4"	152	102	44	1 7/8"	13	51	38	7120	6350
FSC - 2	2"	178	127	57	2 1/4"	16	64	64	9390	8370
FSC - 2 1/4	2 1/4"	203	152	70	2 1/2"	19	76	64	12430	11000
FSC - 2 1/2	2 1/2"	203	152	70	2 3/4"	19	76	64	15200	13560

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :



2. MATERIAL : FORGE STEEL AND PIN WITH COTTER PIN.

3. REF. GRINNELL FIG. 299 OR EQ.

4. FURNISHED WITH "UNC" THREADS.

FILE: M-24M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-24	
DATE	7/15/'24		APPR.	CHEN			
FORGED STEEL CLEVIS						REV. 1	