


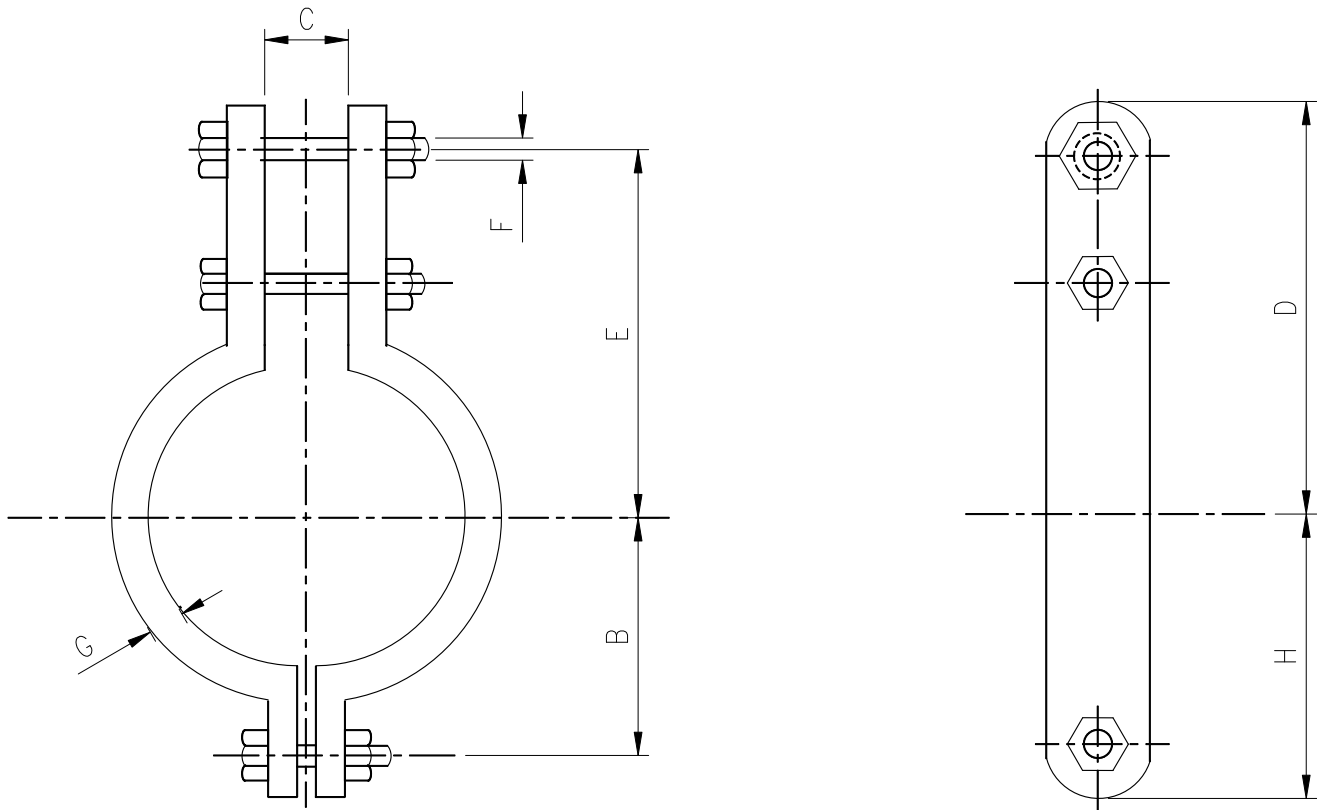


DIMENSION (mm)

TYPE	LINE SIZE	MAX. RECOM. LOAD (Kg)				B	C	D	E	F	G	H
		650°F	750°F	1000°F	1050°F							
PCL-E-1 1/2B	1 1/2"	700	635	450	335	46	27	124	105	5/8"	6 x 32	60
PCL-E- 2B	2"	700	635	450	335	54	27	149	130	5/8"	6 x 32	68
PCL-E-2 1/2B	2 1/2"	700	635	450	335	59	27	156	137	5/8"	6 x 32	75
PCL-E- 3B	3"	700	635	450	335	70	27	170	151	5/8"	6 x 32	89
PCL-E- 4B	4"	1130	1035	735	540	86	27	194	165	3/4"	8 x 51	114
PCL-E- 5B	5"	1130	1035	735	540	100	27	206	178	3/4"	8 x 51	127
PCL-E- 6B	6"	1295	1185	840	625	121	37	252	218	7/8"	9 x 64	181
PCL-E- 8B	8"	1295	1185	840	625	146	37	278	243	7/8"	9 x 64	181
PCL-E-10B	10"	1465	1345	950	705	179	37	305	270	1"	12 x 64	210

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

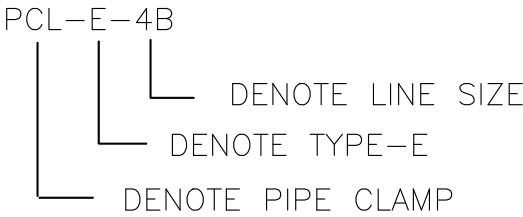

2. MATERIAL: CHROME MOLYBDENUM STEEL (ASTM A387-GR.22)
3. REF. GRINNELL FIG. 295A OR EQ.

FILE: M-8M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-8	
DATE	7/15/'24		APPR.	CHEN			
PIPE CLAMP TYPE-E						REV. 1	