


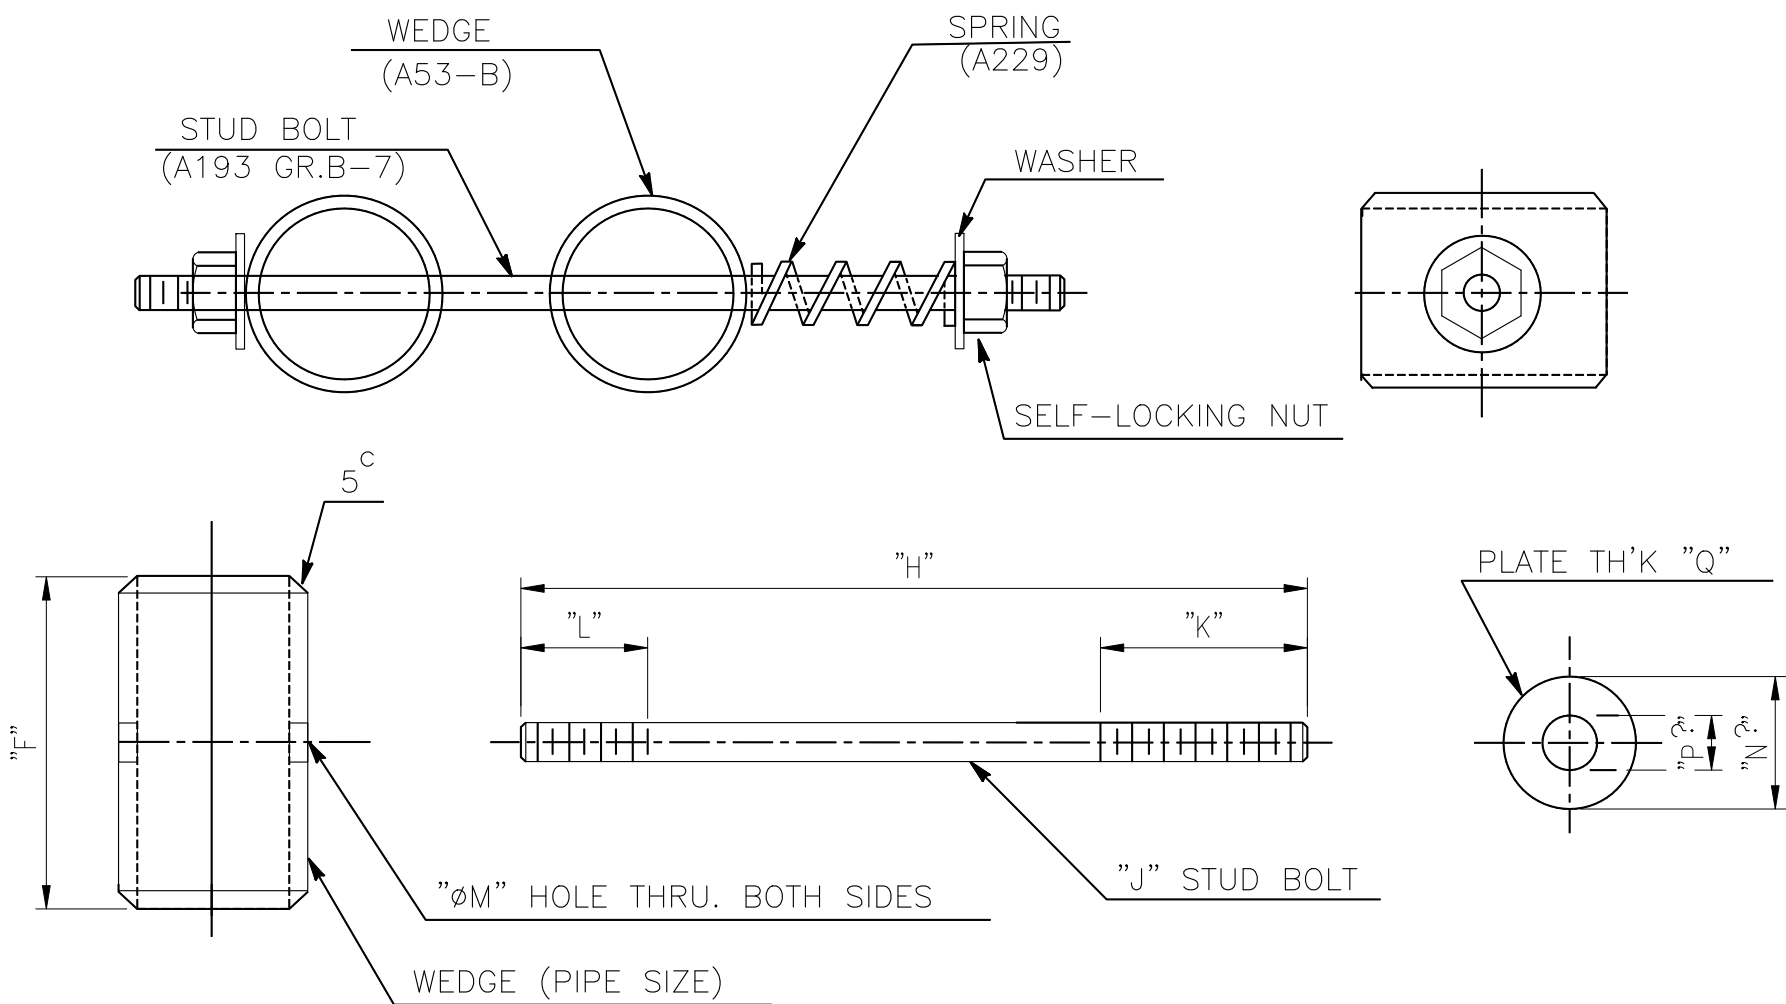

DIMENSIONS (mm)

TYPE	LINE SIZE	PIPE SIZE	F	H	J	K	L	M	N	P	Q
SPRW - 2B	2"	2"-SCH.80	154	295	1/2"	102	57	14	40	14	6
SPRW - 3B	3"	2"-SCH.80	154	295	1/2"	102	57	14	40	14	6
SPRW - 4B	4"	2"-SCH.80	154	295	1/2"	102	57	14	40	14	6
SPRW - 6B	6"	2"-SCH.80	154	345	3/4"	127	57	21	45	21	10
SPRW - 8B	8"	2"-SCH.80	154	345	3/4"	127	57	21	45	21	10
SPRW - 10B	10"	3"-SCH.80	154	470	3/4"	127	70	21	45	21	10
SPRW - 12B	12"	3"-SCH.80	154	470	3/4"	127	70	21	45	21	10
SPRW - 14B	14"	3"-SCH.80	154	470	3/4"	127	70	21	45	21	10
SPRW - 16B	16"	3"-SCH.80	154	505	3/4"	127	70	21	45	21	10
SPRW - 18B	18"	3"-SCH.80	154	505	3/4"	127	70	21	45	21	10
SPRW - 20B	20"	3"-SCH.80	154	505	3/4"	127	70	21	45	21	10
SPRW - 24B	24"	3"-SCH.80	229	610	1"	190	95	27	65	27	10

SPRING DATA TABLE			
COMPRESSION SPRING WITH SQUARED AND GROUND ENDS			
LINE SIZE "P"	2"-4"	6"-20"	24"
WIRE DIAMETER	5 mm	8 mm	10 mm
SPRING INSIDE DIAMETER	14 mm	22 mm	28 mm
NUMBER OF ACTIVE COILS	6	5	4
NUMBER OF UNACTIVE COILS	2	2	2
FREE LENGTH	65 mm	80 mm	110 mm
SPRING CONSTANT	15 kg/mm	30 kg/mm	45 kg/mm
COMPRESS SPRING FOR INSTALLATION	12 mm	12 mm	25 mm

NOTE : 1. DESIGNATION NUMBER DENOTE AS FOLLOWS :



中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
						M-52	REV. 1
BY	SHIH		CHK.	YANG		SPRING WEDGE	
DATE	7/15/'24		APPR.	CHEN			

FILE: M-52M.DWG