


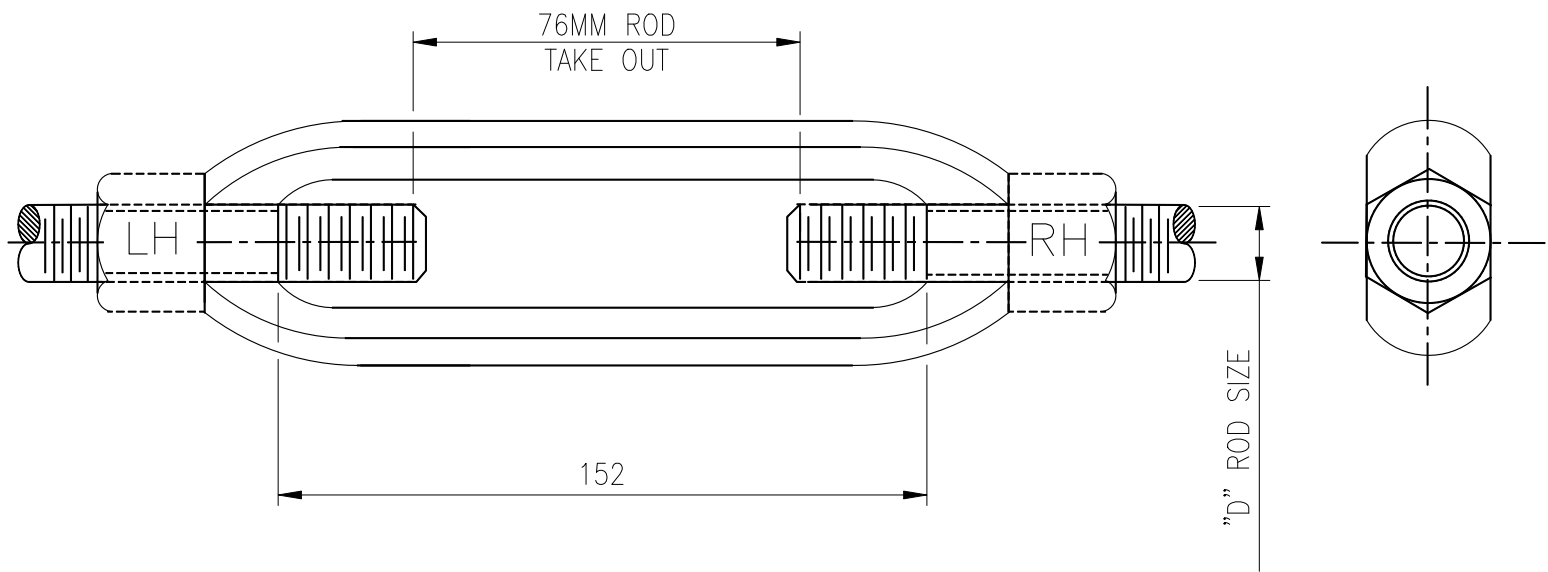

| TYPE       | D     | MAX.RECOM. LOAD (Kg) |       |
|------------|-------|----------------------|-------|
|            |       | 650°F                | 750°F |
| TUB -3/8   | 3/8   | 270                  | 240   |
| TUB -1/2   | 1/2   | 510                  | 460   |
| TUB -5/8   | 5/8   | 820                  | 730   |
| TUB -3/4   | 3/4   | 1230                 | 1100  |
| TUB -7/8   | 7/8   | 1710                 | 1520  |
| TUB - 1    | 1     | 2250                 | 2000  |
| TUB -1 1/4 | 1 1/4 | 3630                 | 3240  |
| TUB -1 1/2 | 1 1/2 | 5280                 | 4700  |
| TUB -1 3/4 | 1 3/4 | 7120                 | 6350  |
| TUB - 2    | 2     | 9390                 | 8370  |
| TUB -2 1/4 | 2 1/4 | 12430                | 11000 |
| TUB -2 1/2 | 2 1/2 | 15200                | 13560 |

NOTES :

1. MATERIAL : FORGE STEEL
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

TUB-3/8

DENOTE DIAMETER OF INTERNAL THREAD "D"

DENOTE TURNBUCKLE
3. REF. GRINNELL FIG. 230 OR EQ.
4. FURNISHED WITH "UNC" THREADS.

|                                                            |          |  |       |      |  |                      |        |
|------------------------------------------------------------|----------|--|-------|------|--|----------------------|--------|
| 中威工程顧問股份有限公司<br>CHUNG WEI ENGINEERING CONSULTING CO., LTD. |          |  |       |      |  | ENGINEERING STANDARD |        |
|                                                            |          |  |       |      |  | HP6-DSD-A4-500-001   |        |
| BY                                                         | SHIH     |  | CHK.  | YANG |  | TURNBUCKLE           |        |
| DATE                                                       | 7/15/'24 |  | APPR. | CHEN |  |                      |        |
|                                                            |          |  |       |      |  | M-21                 | REV. 1 |

FILE: M-21M.DWG