


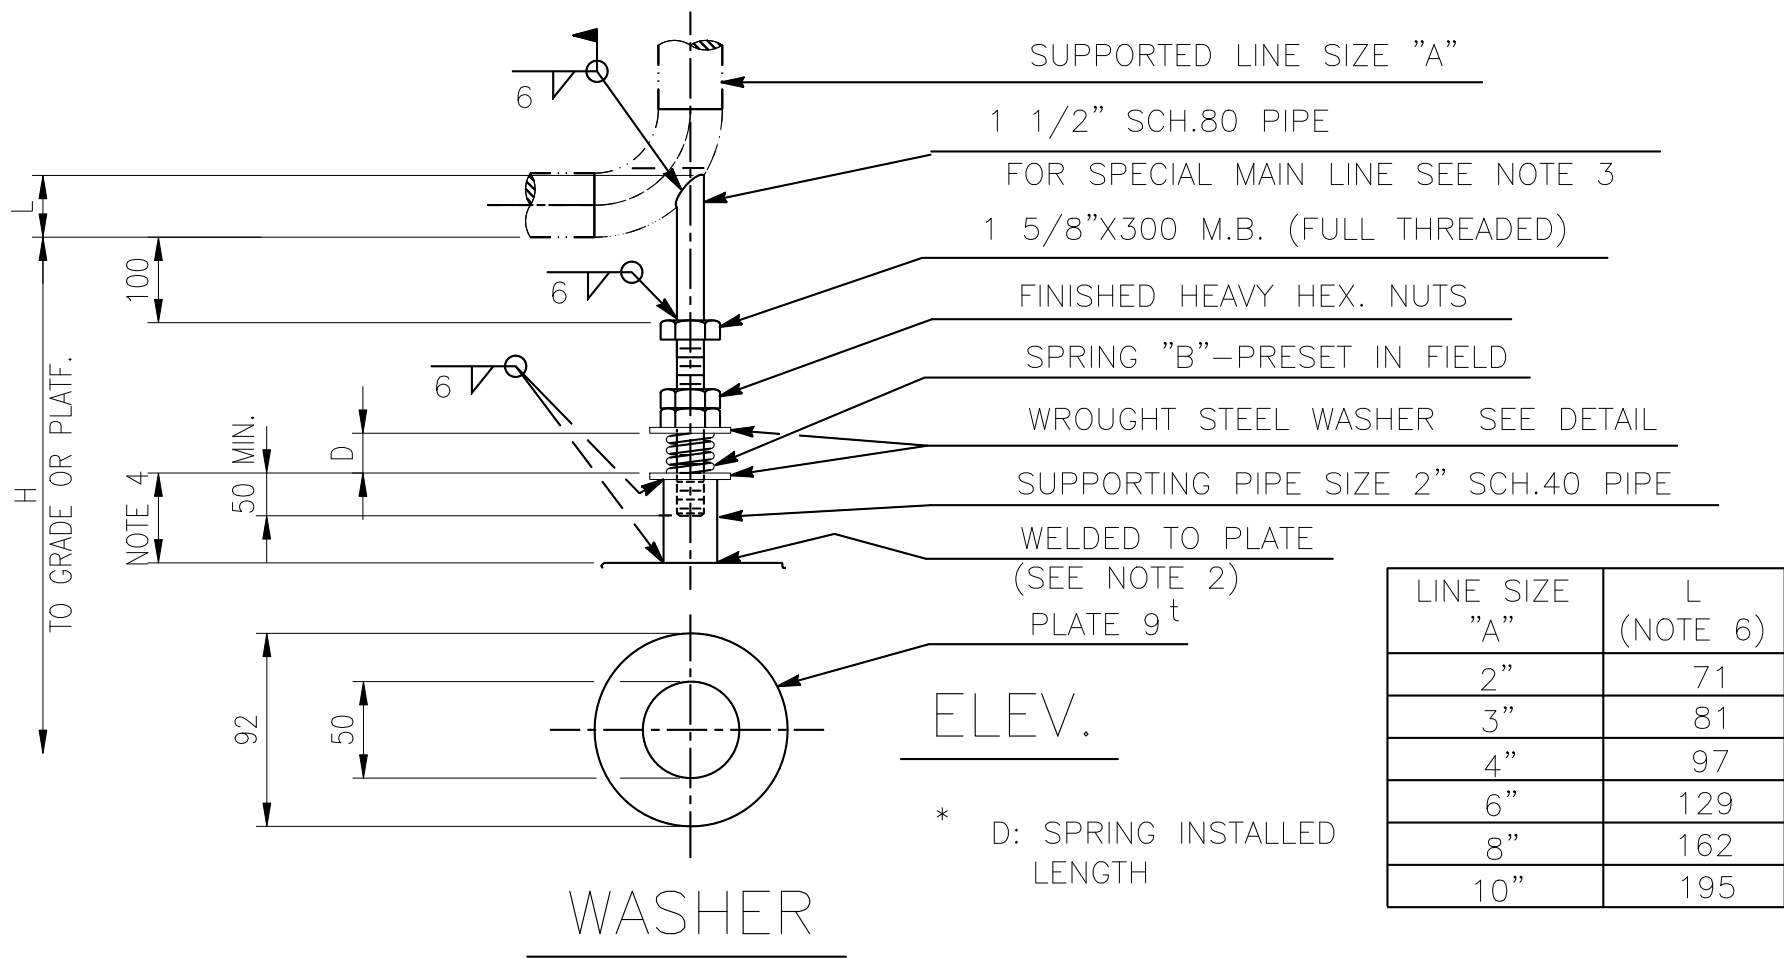

LINE SIZE "A"	H	SPRING "B" (MAT'L : ASTM A229)	SPRING MARK NO.
2"	600	ø12 WIRE , 46 mm I.D. 4 ACTIVE COILS, 2 INACTIVE COILS SPRING CONSTANT = 25 kg/mm FREE LENGTH = 100 mm MAX. RECOM. DEFLECTION : 22 mm	SPR12
2"	1200		
3"	600		
3"	1200		
4"	600		
4"	1200		
6"	600	ø14 WIRE , 46 mm I.D. 4 ACTIVE COILS, 2 INACTIVE COILS SPRING CONSTANT = 42 kg/mm FREE LENGTH = 115 mm MAX. RECOM. DEFLECTION : 24 mm	SPR14
6"	1200		
8"	600		
8"	1200		
10"	600		
10"	1200		

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOWS:

11-2B-06G

DENOTE TYPE NO. DENOTE THE LOWER COMPONENT TYPE
SEE M-42

DENOTE SUPPORTED LINE SIZE "A" DENOTE DIMENSION "H"
2. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE.
IN THIS DETAIL , USE TYPE-G & J ONLY.
3. FOR ALLOY STEEL, STAINLESS STEEL & STRESS RELIEF LINES, THE MATERIALS
SHALL BE THE SAME AS MAIN LINES.
4. DIMENSION SHALL BE CUT TO SUIT IN FIELD.
5. WHEN THIS TYPE OF SUPPORT IS APPLIED ADJACENT TO PUMP OR TURBINE CONNECTION,
THE SPRING MUST BE ADJUSTED BY TRIAL TO PERMIT EASY REMOVE OF ALL FLANGE
BOLTS, AND IT IS NOT PERMISSIBLE TO CORRECT PIPING MISALIGNMENT BY COMPRESSING
THE SPRING TO ITS SOLID LENGTH.
6. DIMENSION "L" IS BASED ON LONG RADIUS ELBOW TO WHICH DUMMY PIPE IS WELDED.
7. IF THE LOWER COMPONENT TYPE-G IS USED, DIMENSION "H" SHALL BE COUNTED
FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-11	REV. 1
DATE	7/15/'24		APPR.	CHEN			

DETAIL OF PIPE SUPPORT
TYPE-11