



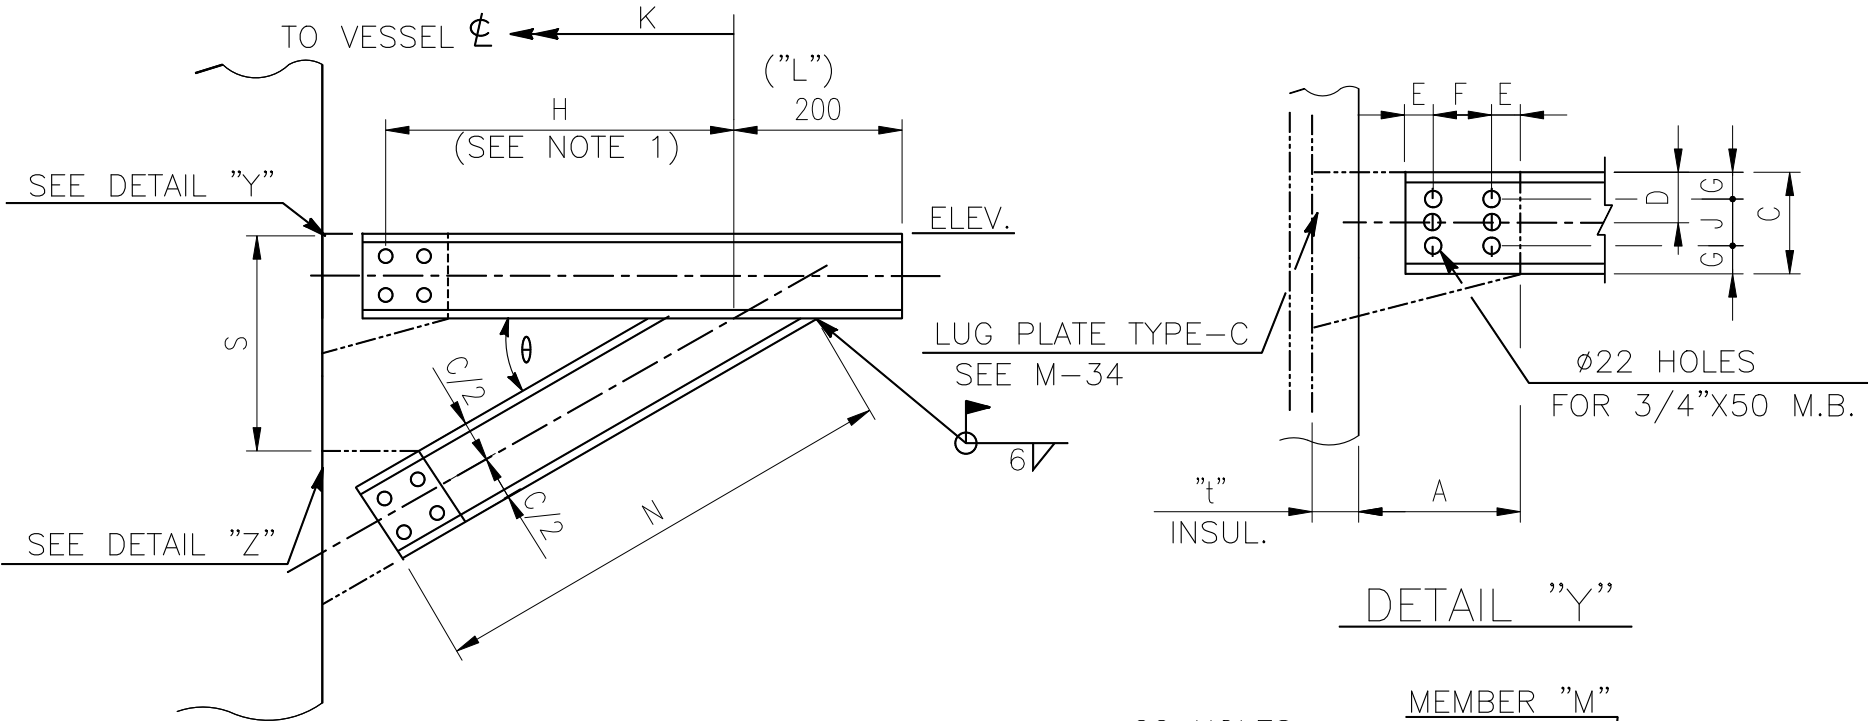

DIMENSIONS (mm)

MEMBER "M"	A	C	D	E	F	G	J	H (MAX.)
L75X75X9	160	75	40	30	70	—	—	1450
C100X50X5	170	100	50	30	80	—	—	1450
C125X65X6	170	125	—	30	80	35	55	1450
C150X75X9	190	150	—	30	100	40	70	2000
C180X75X7	210	180	—	35	110	45	90	2000
C200X90X8	220	200	—	35	120	50	100	2000

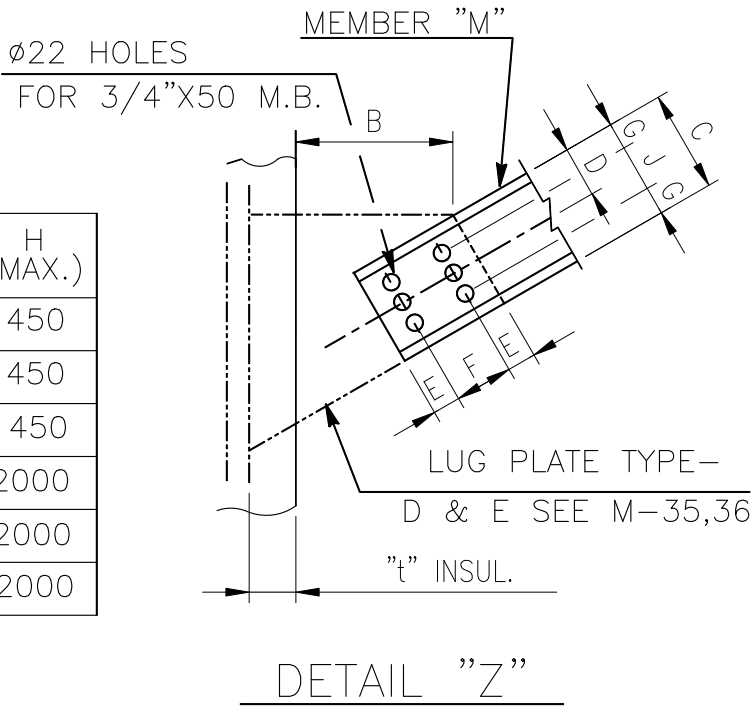


DIMENSIONS (mm)

MEMBER "M"	$\theta = 30^\circ$			$\theta = 45^\circ$		
	B	S	N	B	S	N
L75X75X9	135	0.577H-8	1.155H+ 92	115	H - 30	1.414H+57
C100X50X5	145	0.577H-7	1.155H+100	120	H - 31	1.414H+55
C125X65X6	145	0.577H+4	1.155H+114	130	H - 33	1.414H+41
C150X75X9	165	0.577H+3	1.155H+125	140	H - 36	1.414H+47
C180X75X7	185	0.577H+7	1.155H+145	150	H - 32	1.414H+60
C200X90X8	195	0.577H+9	1.155H+155	160	H - 36	1.414H+56

NOTES :

1. $H=K-R-t-E-30$ WHERE "R" IS RADIUS OF VESSEL
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

39-C100-500 A OR B-05

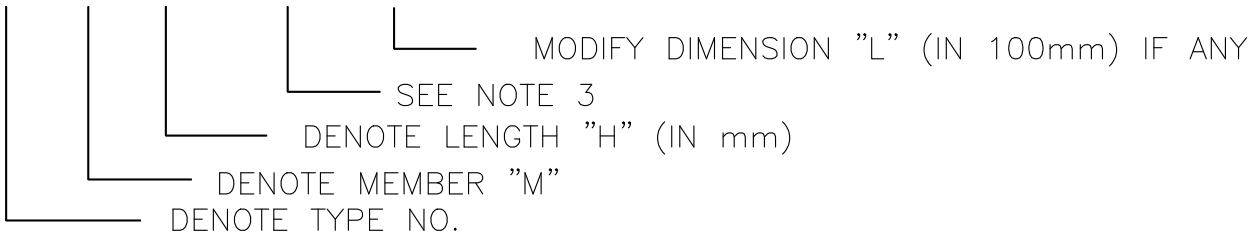

3. A: FOR $\theta = 30^\circ$
- B: FOR $\theta = 45^\circ$

FILE: D-45M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-45	REV.
DATE	7/15/'24		APPR.	CHEN			1

DETAIL OF PIPE SUPPORT
TYPE-39