

## ASSIGNMENT-4

Date	23 October 2022
TeamID	PNT2022TMID49482
Name	Neha N
MaximumMarks	2Marks

### Question1:

Write code and connections in work for ultrasonic sensor. Whenever distance is less than 100cms send "alert" to ibm cloud and display in device recent events.

### CODE:

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* subscribtopic, byte* payload, unsigned int payloadlength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "4hn0jp" //IBM ORGANITION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDETECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wu05s7PR)ZSegVk&Rx" //Token
13 String data;
14 float dist;
15
16
17 //----- Customise the above values -----
18 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
19 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and format in which data to be send
20 char subscribtopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
21 char authMethod[] = "use-token-auth"; // authentication method
22 char token[] = TOKEN;
23 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
24
25
26 //-----
27 WiFiClient wificlient; // creating the instance for wificlient
28 PubSubClient client(server, 1883, callback ,wificlient); //calling the predefined client id by passing parameter like server id,portand wificredential
29
30 int LED = 4;
31 int trig = 5;
32 int echo = 18;
33 void setup()
34 {
35   Serial.begin(115200);
```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▼

```
36  pinMode(trig,OUTPUT);
37  pinMode(echo,INPUT);
38  pinMode(LED, OUTPUT);
39  delay(10);
40  wificonnect();
41  mqttconnect();
42  }
43  void loop()// Recursive Function
44  {
45
46      digitalWrite(trig,LOW);
47      digitalWrite(trig,HIGH);
48      delayMicroseconds(10);
49      digitalWrite(trig,LOW);
50      float dur = pulseIn(echo,HIGH);
51      float dist = (dur * 0.0343)/2;
52      Serial.print ("Distancein cm");
53      Serial.println(dist);
54
55
56      PublishData(dist);
57      delay(1000);
58      if (!client.loop()) {
59          mqttconnect();
60      }
61  }
62
63
64
65  /*.....retrieving to Cloud.....*/
66
67  void PublishData(float dist) {
68      mqttconnect();//function call for connecting to ibm
69      /*
70      | creating the String in in form JSON to update the data to ibm cloud
```

```

70 | creating the String in in form JSON to update the data to ibm cloud
71 */
72 String object;
73 if (dist <100)
74 {
75     digitalWrite(LED,HIGH);
76     Serial.println("object is near");
77     object = "Near";
78 }
79 else
80 {
81     digitalWrite(LED,LOW);
82     Serial.println("no object found");
83     object = "No";
84 }
85
86 String payload = "{\"distance\":";
87 payload += dist;
88 payload += ", \"object\":\":";
89 payload += object;
90 payload += "\"}";
91
92
93 Serial.print("Sending payload: ");
94 Serial.println(payload);
95
96
97
98

```

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager
98
99 if (client.publish(publishTopic, (char*) payload.c_str())) {
100     Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
101 } else {
102     Serial.println("Publish failed");
103 }
104
105 }
106 void mqttconnect() {
107     if (!client.connected()) {
108         Serial.print("Reconnecting client to ");
109         Serial.println(server);
110         while (!client.connect(clientId, authMethod, token)) {
111             Serial.print(".");
112             delay(500);
113         }
114
115         initManagedDevice();
116         Serial.println();
117     }
118 }
119 void wificonnect() //function defination for wificonnect
120 {
121     Serial.println();
122     Serial.print("connecting to ");
123
124     WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
125     while (WiFi.status() != WL_CONNECTED) {
126         delay(500);
127         Serial.print(".");
128     }
129     Serial.println("");
130     Serial.println("WiFi connected");
131     Serial.println("IP address: ");
132     Serial.println(WiFi.localIP());

```

esp32-blink.ino • diagram.json • libraries.txt • Library Manager ▾

```
123
124   WiFi.begin("Wokwi-GUEST", "", 6); //passing the wifi credentials to establish the connection
125   while (WiFi.status() != WL_CONNECTED) {
126       delay(500);
127       Serial.print(".");
128   }
129   Serial.println("");
130   Serial.println("WiFi connected");
131   Serial.println("IP address: ");
132   Serial.println(WiFi.localIP());
133 }
134
135 void initManagedDevice() {
136     if (client.subscribe(subscribetopic)) {
137         Serial.println((subscribetopic));
138         Serial.println("subscribe to cmd OK");
139     } else {
140         Serial.println("subscribe to cmd FAILED");
141     }
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // if(data3=="Near") {
159     //     Serial.println("Near");
160     // }
```

esp32-blink.ino ●


diagram.json ●

libraries.txt ●

Library Manager ▼


```
142 }
143
144 void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145 {
146
147     Serial.print("callback invoked for topic: ");
148     Serial.println(subscribetopic);
149     for (int i = 0; i < payloadLength; i++) {
150         //Serial.print((char)payload[i]);
151         data3 += (char)payload[i];
152     }
153
154     // Serial.println("data: "+ data3);
155     // if(data3=="Near")
156     // {
157     // Serial.println(data3);
158     // digitalWrite(LED,HIGH);
159
160     // }
161
162     // else
163     // {
164     // Serial.println(data3);
165     // digitalWrite(LED,LOW);
166
167     // }
168     data3="";
169
170
171 }
```

## OUTPUT:

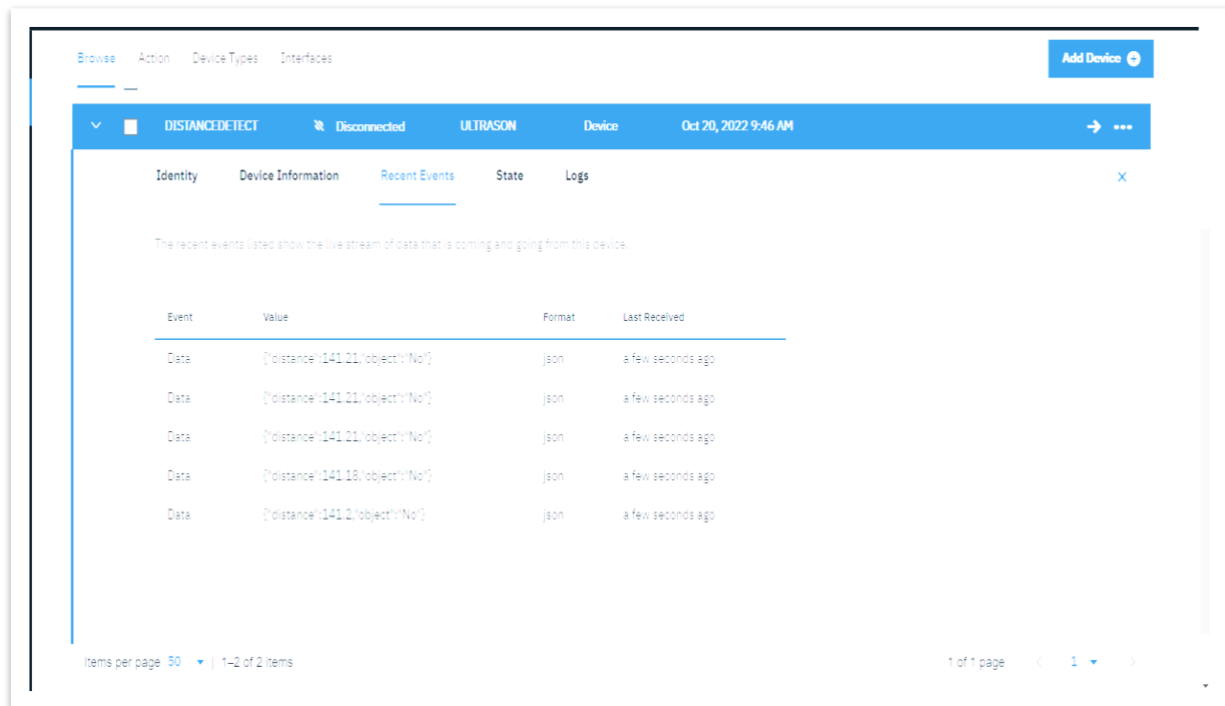

Event	Value	Format	Last Received
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.21,\"object\":\"No\"}	json	a few seconds ago
Data	{\"distance\":141.2,\"object\":\"No\"}	json	a few seconds ago

Data send to the IBMcloud device when the objectics far

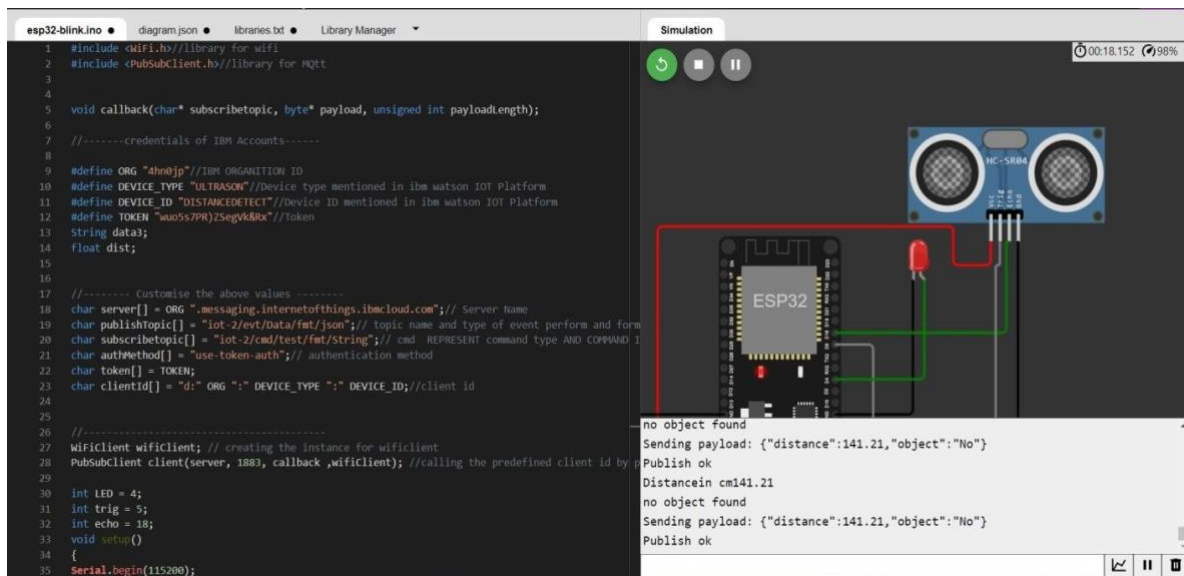

```
1 #include <WiFi.h> //library for wifi
2 #include <PubSubClient.h> //library for MQTT
3
4
5 void callback(char* topic, byte* payload, unsigned int payloadlength);
6
7 //-----credentials of IBM Accounts-----
8
9 #define ORG "dhn0jp" //IBM ORGANIZATION ID
10 #define DEVICE_TYPE "ULTRASON" //Device type mentioned in ibm watson IOT Platform
11 #define DEVICE_ID "DISTANCEDTECT" //Device ID mentioned in ibm watson IOT Platform
12 #define TOKEN "wuo5s7PR)2SegVx8Rk" //Token
13 String data3;
14 float dist;
15
16 //----- Customise the above values -----
17 char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
18 char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and form
19 char subscribeTopic[] = "iot-2/cmd/test/fmt/String"; // cmd REPRESENT command type AND COMMAND ID
20 char authMethod[] = "use-token-auth"; // authentication method
21 char token[] = TOKEN;
22 char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //client id
23
24 //-----
25
26 WiFiClient wificlient; // creating the instance for wificlient
27 PubSubClient client(server, 1883, callback, wificlient); //calling the predefined client id by
28
29 int LED = 4;
30 int trig = 5;
31 int echo = 18;
32 void setup()
33 {
34   Serial.begin(115200);
```

## Data sent to the IBMCloud Device when the object is near

The screenshot shows the IBM Cloud IoT Dashboard interface. At the top, there are tabs for 'Browse', 'Action', 'Device Types', and 'Interfaces'. A blue header bar contains the device name 'DISTANCEDETECT', its status 'Disconnected', the type 'ULTRASON', and the location 'Device'. The date and time 'Oct 20, 2022 9:46 AM' are also displayed. Below the header, there are tabs for 'Identity', 'Device Information', 'Recent Events', 'State', and 'Logs'. The 'Recent Events' tab is selected, showing a table of events. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. There are five rows of data, all with the event type 'Data' and the value '[\"distance\":79.66,\"object\":\"Near\"]'. The format for all events is 'json', and they were all received 'a few seconds ago'. At the bottom of the table, it says 'Items per page: 50' and '1-2 of 2 items'. On the right side, it says '1 of 1 page' and '1'.

Event	Value	Format	Last Received
Data	[\"distance\":79.66,\"object\":\"Near\"]	json	a few seconds ago
Data	[\"distance\":79.64,\"object\":\"Near\"]	json	a few seconds ago
Data	[\"distance\":79.66,\"object\":\"Near\"]	json	a few seconds ago
Data	[\"distance\":79.64,\"object\":\"Near\"]	json	a few seconds ago
Data	[\"distance\":79.66,\"object\":\"Near\"]	json	a few seconds ago

## When object is near to the ultrasonic sensor

The screenshot shows a Wokwi simulation of an ESP32 microcontroller connected to an HC-SR04 ultrasonic sensor. The sensor is connected to the ESP32's pins: VCC to 5V, GND to GND, Trig to D4, and Echo to D5. A red LED is connected to the Trig pin (D4) and the Echo pin (D5). The simulation is running, and the console shows the following output:

```
object is near
Sending payload: {\"distance\":97.82,\"object\":\"Near\"}
Publish ok
Distance in cm 97.82
object is near
Sending payload: {\"distance\":97.82,\"object\":\"Near\"}
Publish ok
```