



ENGINEERING DATA OF SPRING COILS						
SPRING MARK NO.	DIA. OF WIRE (MM)	I.D. OF COIL (MM)	NO. OF ACTIVE COILS	NO. OF INACTIVE COILS	SPRING CONSTANT (KG/MM)	FREE LENGTH (MM)
SPR02	2	15	5	2	0.7	25
SPR03	3	19	4	2	1.9	30
SPR04	4	24	4	2	2.9	40
SPR05	5	34	3	2	3.5	55
SPR06	6	39	3	2	4.7	65

* MATERIAL OF SPRING COILS : ASTM A229 CLASS 1

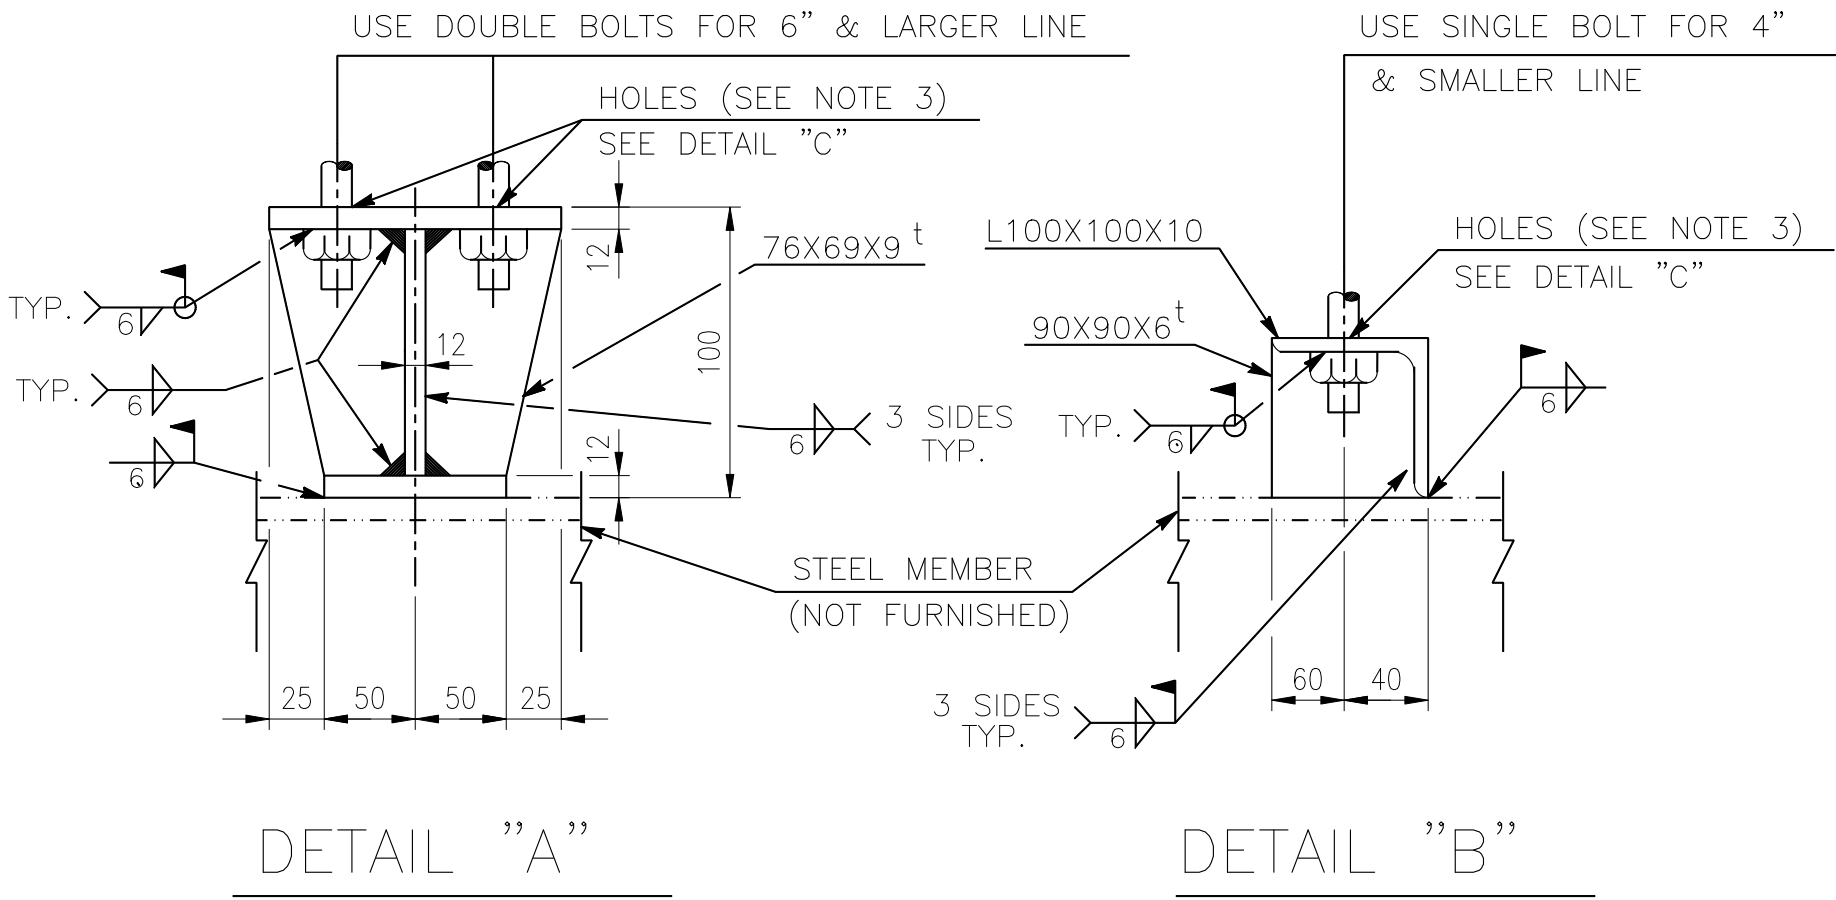


NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOW :

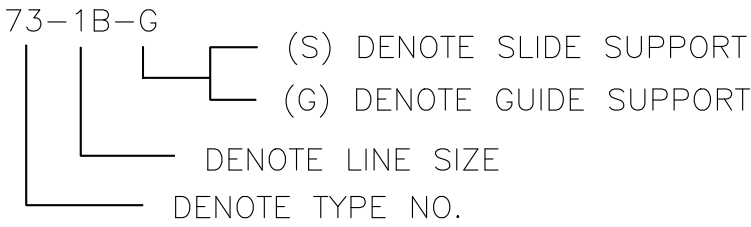

2. BASEPLATES CAN BE CONTINUOUS WHERE HOLDDOWNS ARE ADJACENT TO ONE ANOTHER.

3. L = D+3, USE FOR GUIDE SUP'T
= 2D, USE FOR SLIDE SUP'T



DETAIL "C"

FILE: D-88MA.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-88A	REV.
DATE	7/15/'24		APPR.	CHEN			1

DETAIL OF PIPE SUPPORT
TYPE-73
(2 OF 2)