


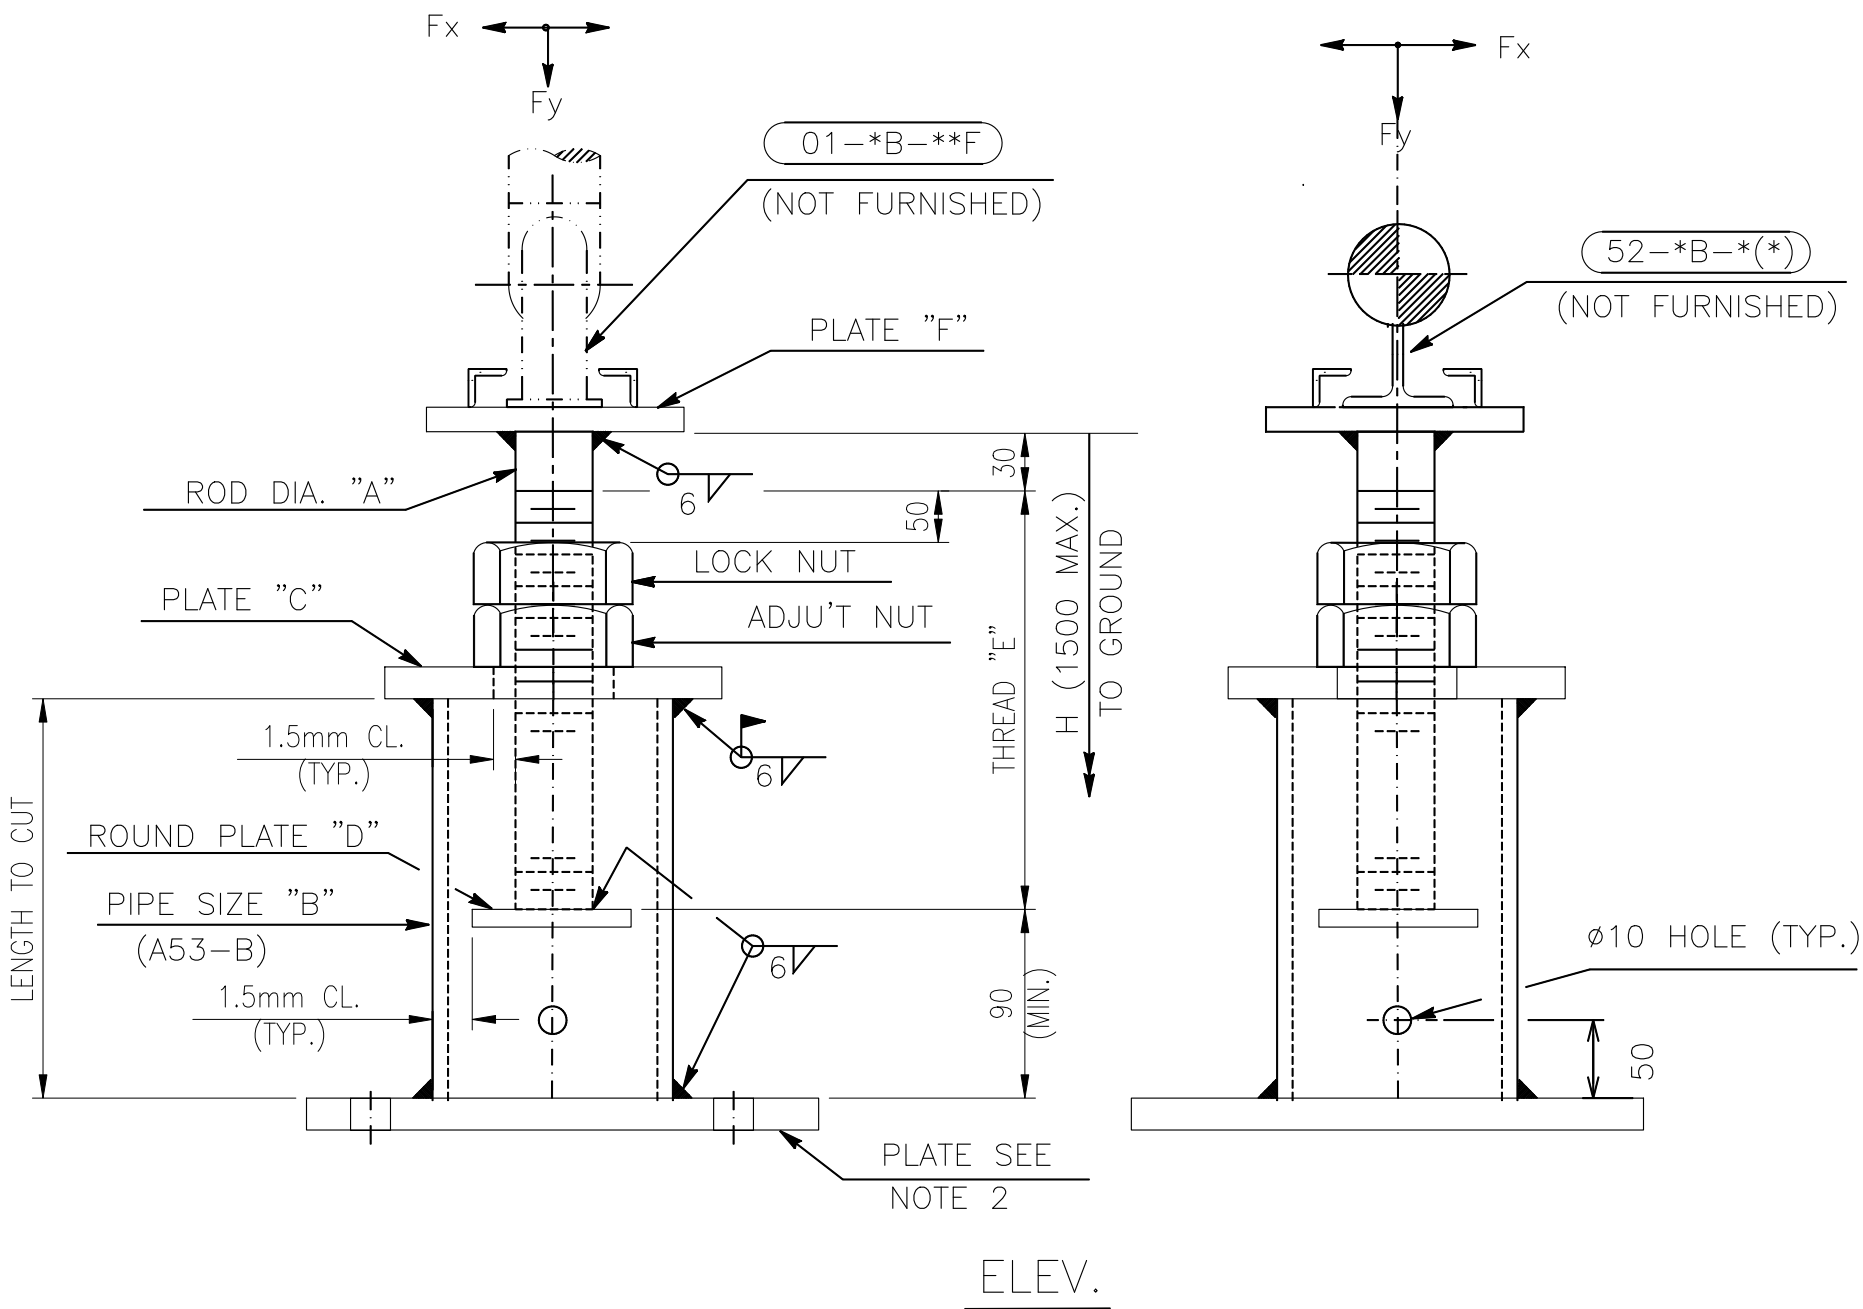

DIMENSIONS (mm)

A	B	C	D	E	F
1"	3"STD	120X120X9 ^t	ø72X9 ^t	160	210X210X9 ^t
1 1/2'	4"STD	150X150X9 ^t	ø96X9 ^t	185	290X290X9 ^t
2"	6"STD	200X200X12 ^t	ø148X12 ^t	215	290X290X12 ^t
2 1/2"	8"STD	250X250X16 ^t	ø197X12 ^t	245	390X390X16 ^t

NOTES :

1. DIMENSION "H" SHALL BE CUT TO SUIT IN FIELD.
2. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL USE TYPE-G,J & R ONLY.
3. DESIGNATION NUMBER DENOTE AS FOLLOWS :

87-M27-10G

DENOTE TYPE NO.

DENOTE ROD SIZE "A"

DENOTE THE LOWER COMPONENT TYPE SEE M-42

DENOTE DIMENSION "H" (IN 100mm)
4. IF THE LOWER COMPONENT TYPE-G IS USED, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.

FILE: D-109M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		D-109	REV.
DATE	7/15/'24		APPR.	CHEN			1