


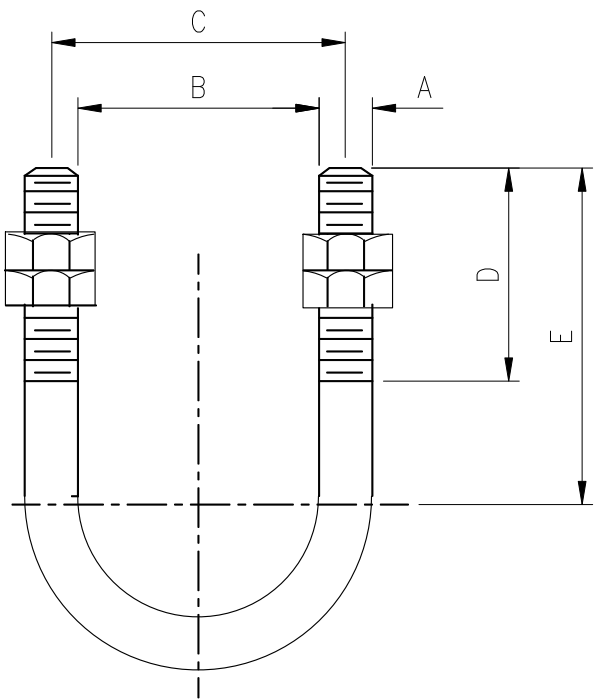

DIMENSIONS (mm)

TYPE	LINE SIZE	ROD SIZE A	MAX. RECOM. LOAD (Kg)		B	C	D	E
			650°F	750°F				
UB - 1/4 B	1/4"	1/4"	220	220	18	24	36	39
UB - 1/2 B	1/2"	1/4"	220	200	24	30	40	43
UB - 3/4 B	3/4"	1/4"	220	200	29	35	40	45
UB -1B	1"	1/4"	220	200	35	41	40	49
UB -1 1/4 B	1 1/4"	3/8"	555	495	43	52	58	65
UB -1 1/2 B	1 1/2"	3/8"	555	495	51	60	58	68
UB -2B	2"	3/8"	555	495	62	71	58	74
UB -2 1/2 B	2 1/2"	1/2"	1025	920	75	87	64	85
UB -3B	3"	1/2"	1025	920	91	103	64	93
UB -3 1/2 B	3 1/2"	1/2"	1025	920	103	116	64	99
UB -4B	4"	1/2"	1025	920	116	129	67	108
UB -5B	5"	1/2"	1025	920	143	156	67	122
UB -6B	6"	5/8"	1645	1470	171	187	79	143
UB -8B	8"	5/8"	1645	1470	222	238	79	169
UB -10B	10"	3/4"	2460	2155	276	295	102	213
UB -12B	12"	7/8"	3425	3060	327	349	111	245
UB -14B	14"	7/8"	3425	3060	359	381	111	261
UB -16B	16"	7/8"	3425	3060	410	432	111	286
UB -18B	18"	1"	4500	4015	460	486	117	316
UB -20B	20"	1"	4500	4015	511	537	121	345
UB -24B	24"	1"	4500	4015	613	638	121	396
UB -30B	30"	1"	4500	4015	765	791	121	472

NOTES :

1. MATERIAL : CARBON STEEL U-BOLT AND FOUR FINISHED HEX. NUTS.
2. DESIGNATION NUMBER DENOTE AS FOLLOWS :
UB-1/2B



FILE: M-26M.DWG

中威工程顧問股份有限公司 CHUNG WEI ENGINEERING CONSULTING CO., LTD.						ENGINEERING STANDARD	
						HP6-DSD-A4-500-001	
BY	SHIH		CHK.	YANG		M-26	
DATE	7/15/'24		APPR.	CHEN			
U-BOLT						REV. 1	