


FOR LINE SIZE 2"-24"

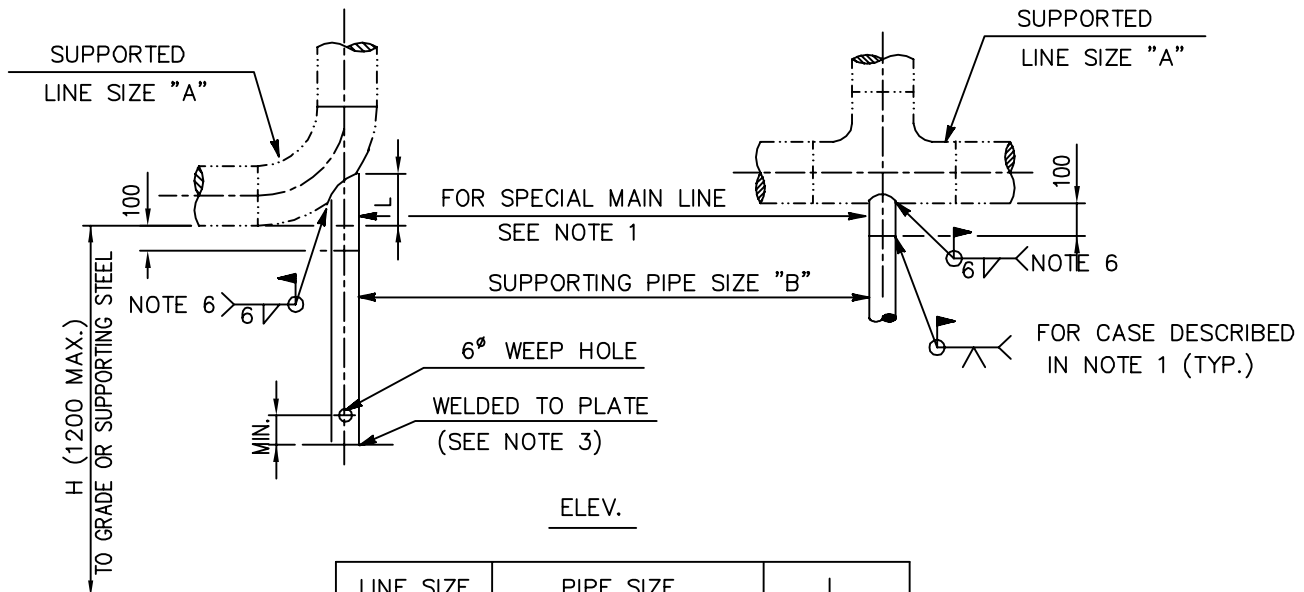

LINE SIZE "A"	PIPE SIZE "B"	L (NOTE 5)
2"	1 1/2" SCH.80	71
3"	2" SCH.40	93
4"	3" SCH.40	139
6"	4" SCH.40	186
8"	6" SCH.40	271
10"	8" SCH.40	353
12"	8" SCH.40	370
14"	10" SCH.40	473
16"	10" SCH.40	491
18"	12" STD.WT	572
20"	12" STD.WT	594
24"	12" STD.WT	647

NOTES :

- FOR ALLOY STEEL, STAINLESS STEEL, & STRESS RELIEF LINES, THE MATERIALS SHALL BE THE SAME AS MAIN LINES, AND IT SHALL BE FABRICATED TOGETHER WITH MAIN LINES IN SHOP.
- DIMENSION "H" SHALL BE CUT TO SUIT IN FIELD .
- THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE.

- DESIGNATION NUMBER DENOTE AS FOLLOWS:

01-2B-05E-A

— DENOTE GUIDE ORIENTATION
(FOR LOWER COMPONENT E,F,K,S)

A: AXIAL STOP

G: GUIDE

F: AXIAL STOP & GUIDE

— DENOTE THE LOWER COMPONENT TYPE SEE M-42

— DENOTE DIMENSION "H" (IN 100mm) (SEE NOTE 2)

— DENOTE SUPPORTED LINE SIZE "A"

— DENOTE TYPE NO.

- DIMENSION "L" IS BASED ON LONG RADIUS ELBOW TO WHICH DUMMY PIPE IS WELDED.
- ALL WELDED CONNECTIONS SHALL BE MADE WITH 6mm FILLET WELDS, BUT FOR ALL WELDS WITH PIPE, THE WELDING THICKNESS SHALL NOT EXCEED THE THICKNESS OF PIPE UNLESS OTHERWISE NOTED.



中鼎工程股份有限公司

CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-01

ENGINEERING STANDARD

D7TS-701-E

D-1

REV.
1

BY			CHK.		
DATE			APPR.		