


FOR LINE SIZE 4" & SMALLER

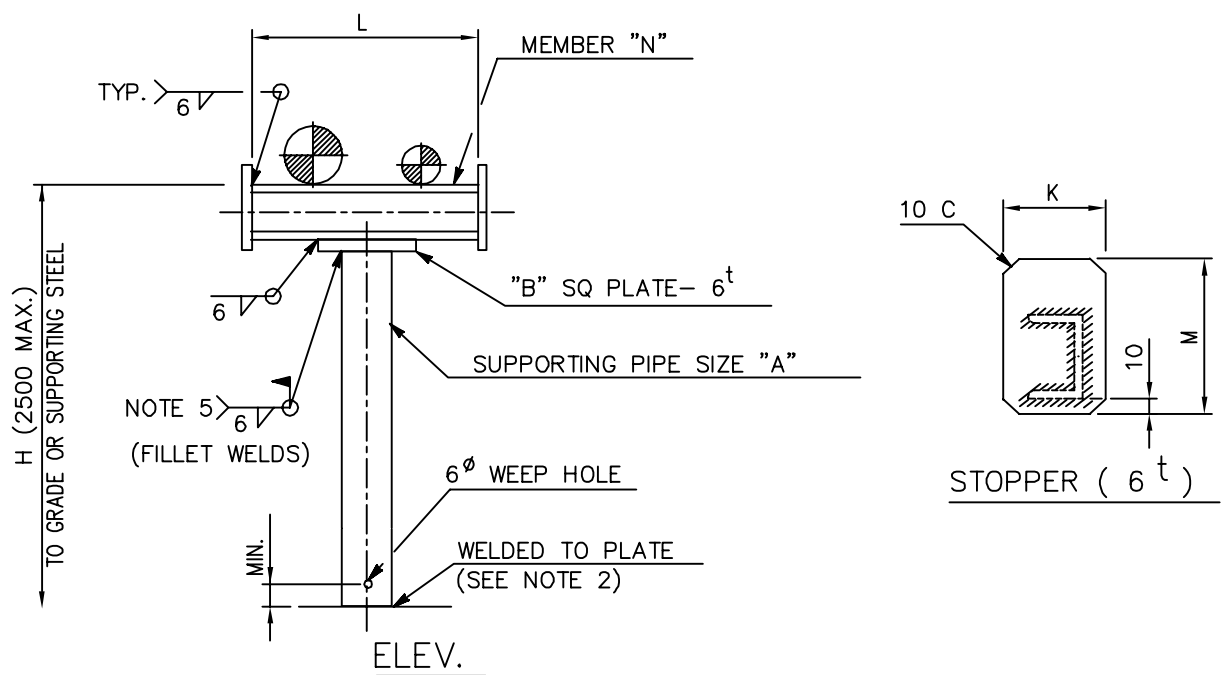

DIMENSIONS (mm)

PIPE SIZE "A"	L (MAX.)	H (MAX.)	K	M	B	MEMBER "N"
3" SCH.40	500	1500	70	160	110	C100X50X5
3" SCH.40	500	2500 (NOTE 4)	70	160	110	C100X50X5
4" SCH.40	800	2500	85	185	135	C125X65X6

NOTES:

- DIMENSION "H" & "L" SHALL BE CUT TO SUIT IN FIELD.
- THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE-G,R & T ONLY.
- DESIGNATION NUMBER DENOTE AS FOLLOWS:
08-3B-0515G
DENOTE THE LOWER COMPONENT TYPE (SEE M-42)
DENOTE DIMENSION "H" (IN 100mm)
DENOTE DIMENSION "L" (IN 100 mm)
DENOTE SUPPORTING PIPE SIZE "A"
DENOTE TYPE NO.
- ONLY FOR 2" OR SMALLER SINGLE LINE, IF 1500<H≤2500.
- ALL WELDED CONNECTIONS SHALL BE MADE WITH 6mm FILLET WELDS, BUT FOR ALL WELDS WITH PIPE, THE WELDING THICKNESS SHALL NOT EXCEED THE THICKNESS OF PIPE UNLESS OTHERWISE NOTED.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-08

ENGINEERING STANDARD

D7TS-701-E

D-8

REV.
1

BY
DATE

CHK.
APPR.