


FOR LINE SIZE 2"-4"

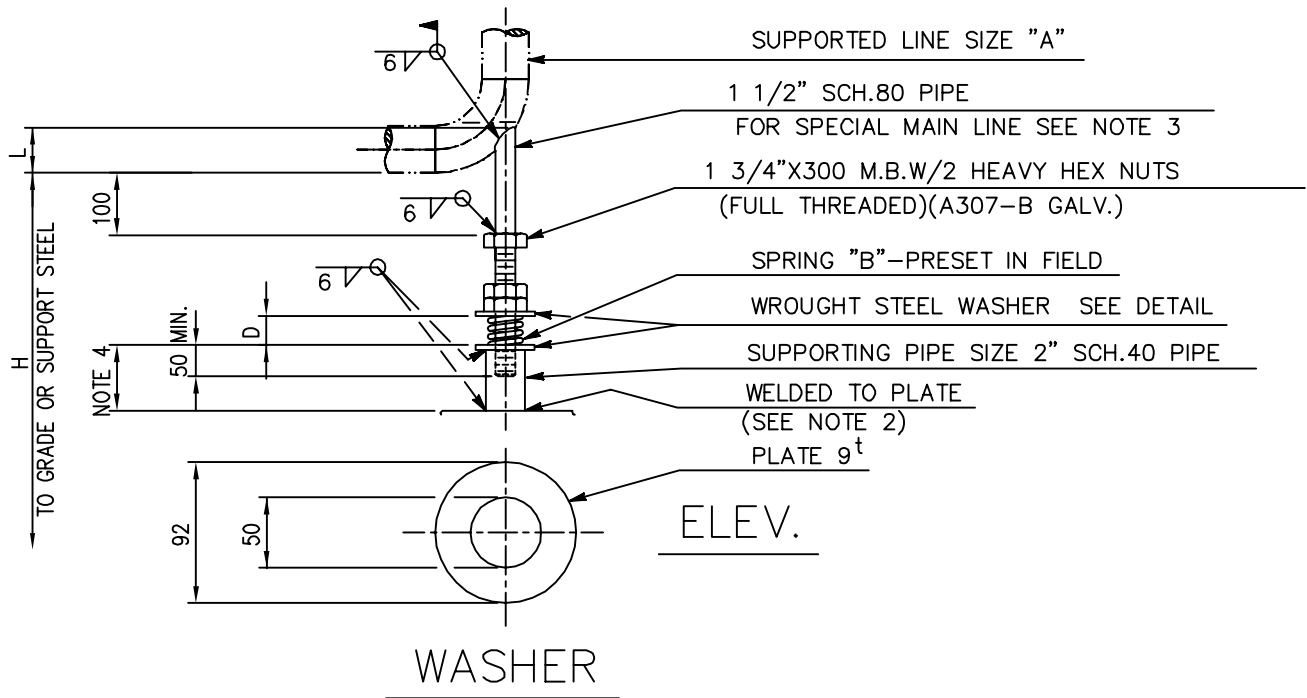

LINE SIZE "A"	H	SPRING "B" (MAT'L : ASTM A229)	SPRING MARK NO.
2"	600	12 ϕ WIRE , 46 mm I.D.	SPR12
2"	1200	4 ACTIVE COILS, 2 INACTIVE COILS	
3"	600	SPRING CONSTANT = 25 kg/mm	
3"	1200	FREE LENGTH = 100 mm	
4"	600	MAX. RECOM. DEFLECTION : 22 mm	
4"	1200		

NOTES:

1. DESIGNATION NUMBER DENOTE AS FOLLOWS:

11-2B-06G-88

DENOTE TYPE NO. _____

DENOTE SUPPORTED LINE SIZE "A" _____

DENOTE SPRING INSTALLED LENGTH "D"(mm)

DENOTE THE LOWER COMPONENT TYPE SEE M-42

DENOTE DIMENSION "H"(IN 100mm)

- THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL , USE TYPE-G, R & T ONLY.
- FOR ALLOY STEEL, STAINLESS STEEL & STRESS RELIEF LINES, THE MATERIALS SHALL BE THE SAME AS MAIN LINES.
- DIMENSION SHALL BE CUT TO SUIT IN FIELD.
- WHEN THIS TYPE OF SUPPORT IS APPLIED ADJACENT TO PUMP OR TURBINE CONNECTION, THE SPRING MUST BE ADJUSTED BY TRIAL TO PERMIT EASY REMOVE OF ALL FLANGE BOLTS, AND IT IS NOT PERMISSIBLE TO CORRECT PIPING MISALIGNMENT BY COMPRESSING THE SPRING TO ITS SOLID LENGTH.
- DIMENSION "L" IS BASED ON LONG RADIUS ELBOW TO WHICH DUMMY PIPE IS WELDED.
- ALL WELDED CONNECTIONS SHALL BE MADE WITH 6mm FILLET WELDS, BUT FOR ALL WELDS WITH PIPE, THE WELDING THICKNESS SHALL NOT EXCEED THE THICKNESS OF PIPE UNLESS OTHERWISE NOTED.



中鼎工程股份有限公司

CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-11

ENGINEERING STANDARD

D7TS-701-E

D-11

REV.
1

BY		CHK.	
DATE		APPR.	