


FOR LINE SIZE 2"-24"

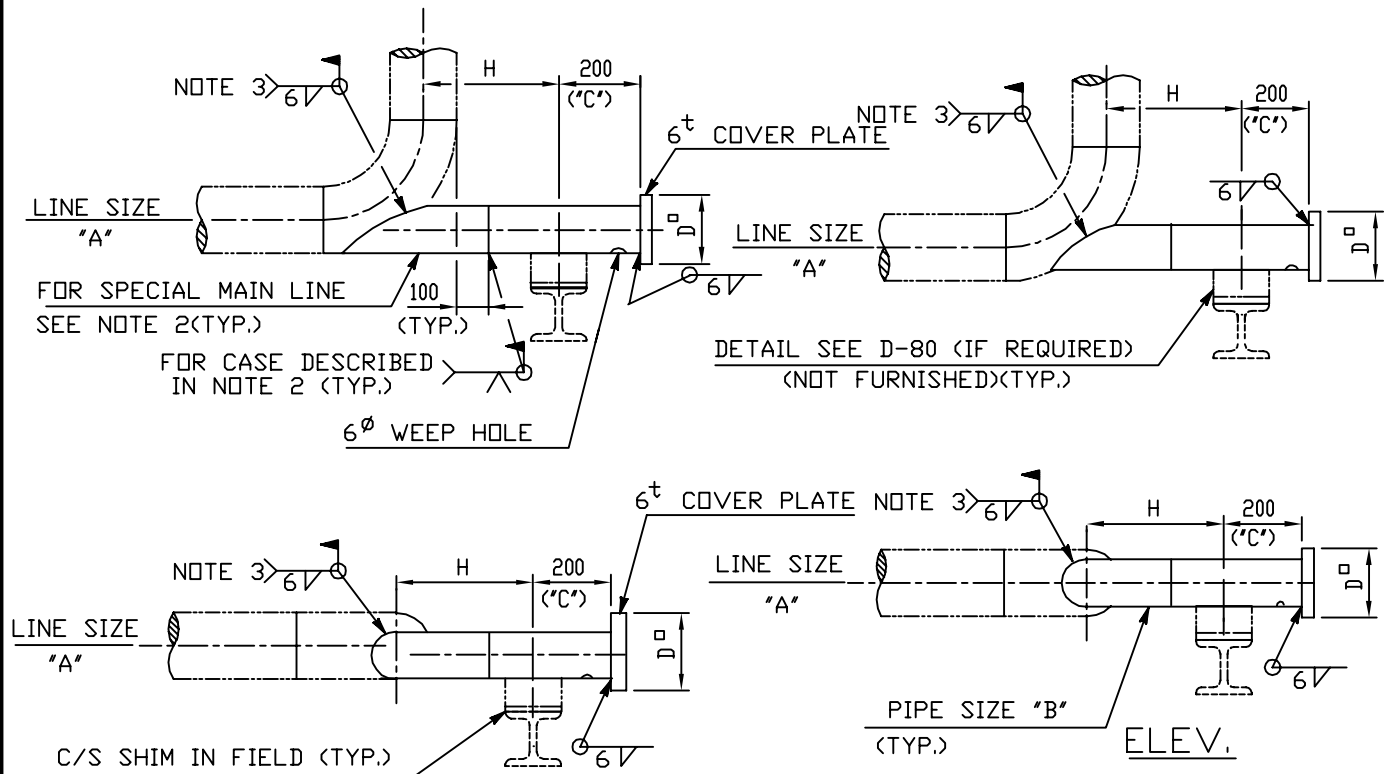

LINE SIZE "A"	PIPE SIZE "B"	D (mm)
2"	1 1/2" SCH.80	70
3"	2" SCH.40	80
4"	3" SCH.40	110
6"	4" SCH.40	140
8"	6" SCH.40	190
10"	8" SCH.40	240
12"	10" SCH.40	290
14"	12" STD.WT	340
16"	12" STD.WT	340
18"	14" STD.WT	380
20"	14" STD.WT	380
24"	16" STD.WT	430

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

16-2B-04-03

MODIFY DIMENSION "C" (IN 100mm) IF ANY

DENOTE DIMENSION "H" (IN 100mm)

DENOTE LINE SIZE "A"

DENOTE TYPE NO.

2. FOR ALLOY STEEL, STAINLESS STEEL & STRESS RELIEF LINES, THE MATERIALS SHALL BE THE SAME AS MAIN LINES, AND IT SHALL BE FABRICATED TOGETHER WITH MAIN LINES IN SHOP.

3. ALL WELDED CONNECTIONS SHALL BE MADE WITH 6mm FILLET WELDS, BUT FOR ALL WELDS WITH PIPE, THE WELDING THICKNESS SHALL NOT EXCEED THE THICKNESS OF PIPE UNLESS OTHERWISE NOTED.



中鼎工程股份有限公司

CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-16

ENGINEERING STANDARD

D7TS-701-E

D-18

REV.
1BY
DATECHK.
APPR.