



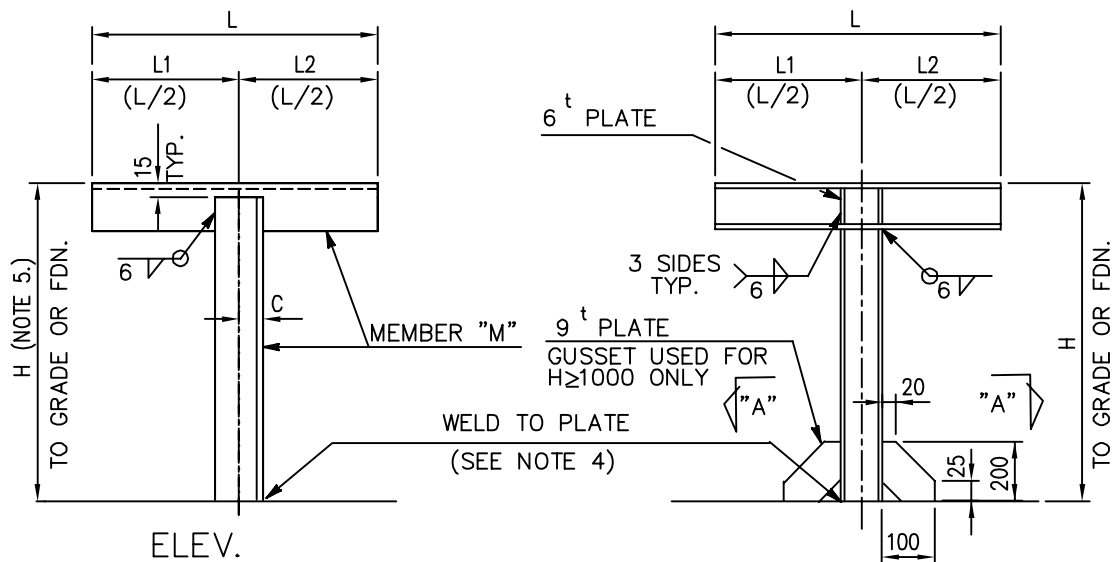

DIMENSION (mm)


MEMBER "M"	L (MAX.)	H (MAX.)	C
L50X50X6	500	800	30
L75X75X9	800	1300	35
L100X100X10	1000	1500	50
H125X125X6.5X9	1000	1500	—
H150X150X7X10	1000	2500	—
H200X200X8X12	1000	2500	—

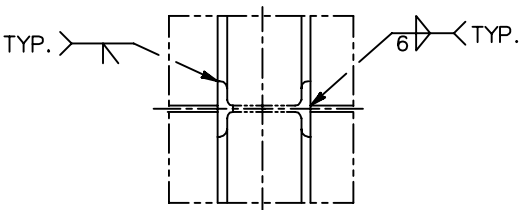

NOTES:

1. DESIGNATION DENOTE AS FOLLOWS:

SECTION "A" ~ "A"

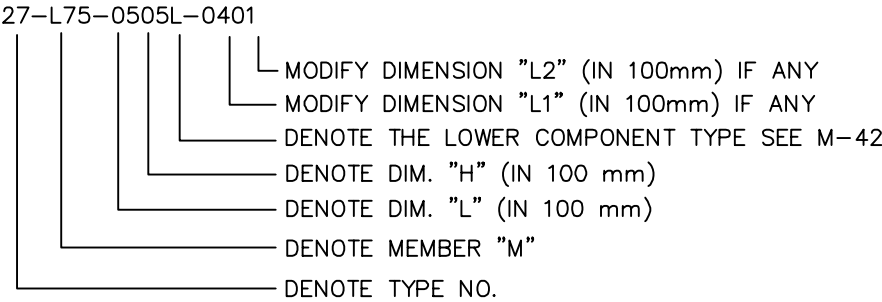

- DIMENSION "H" & "L" SHALL BE CUT TO SUIT IN FIELD.
- IF THE FOUNDATION IS NOT USED IN THIS DETAIL, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.
- THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE-L,R & T ONLY.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT
TYPE-27

ENGINEERING STANDARD

D7TS-701-E

D-30

REV.
1

BY		CHK.	
DATE		APPR.	