



FOR LINE SIZE 44"–78"

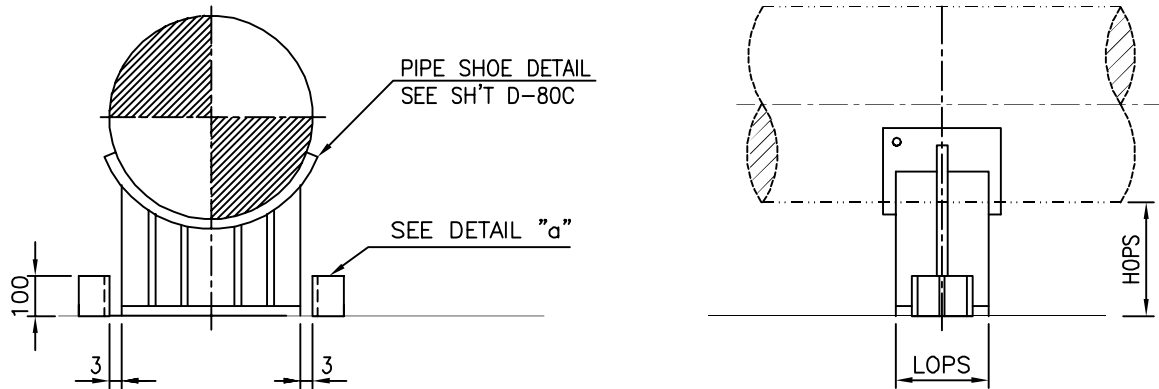

ELEV.

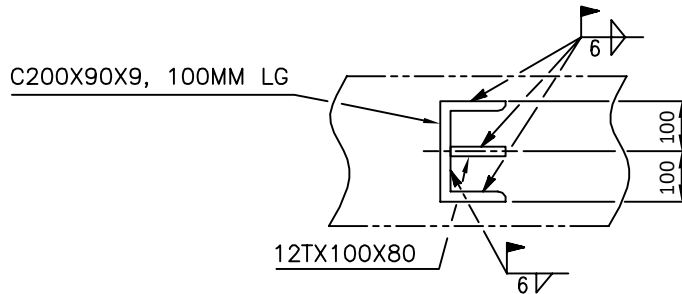

DETAIL "a"

NOTES :

- FOR DIMENSIONS AND INFORMATION NOT SHOWN ON THIS DWG. SEE SH'T D-80C.
- DESIGNATION NUMBER DENOTE AS FOLLOWS :

53-60B-A(A)-130-600
 DENOTE TYPE NO. ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 DENOTE LINE SIZE ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 SEE NOTE 3 ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐
 MODIFY LOPS=600 (IN mm) IF ANY
 MODIFY HOPS=130 (IN mm) IF ANY
 SEE SH'T D-80A TABLE "B"

- TYPE-A FOR INSULATION THICKNESS ≤ 100
 TYPE-B FOR INSULATION THICKNESS > 100 AND ≤ 150
 TYPE-C FOR INSULATION THICKNESS > 150 OR SPECIAL USED.
- LOADING CONDITION: CARBON STEEL SADDLE WITH MAX. LINE TEMPERATURE 371°C
- HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.



中鼎工程股份有限公司
 CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-53

(3 OF 3)

ENGINEERING STANDARD

D7TS-701-E

D-64B

 REV.
 1

BY			CHK.		
DATE			APPR.		