


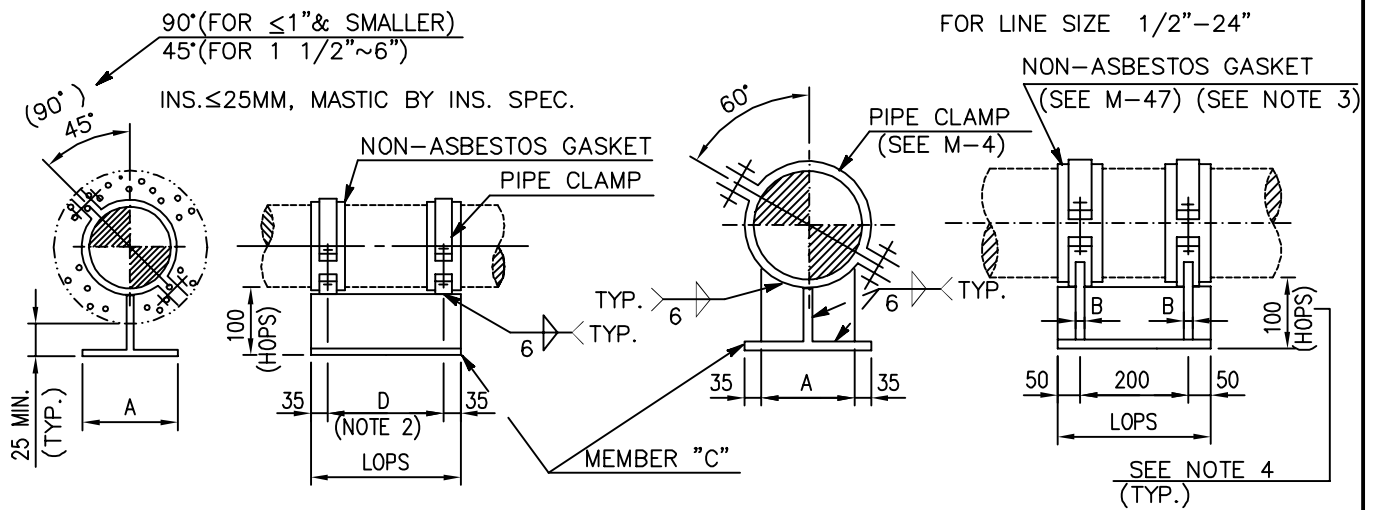

(4" & SMALLER)

ELEV.

(6" TO 24" PIPE)

DIMENSIONS (mm)

LINE SIZE	A	B	C	PIPE CLAMP TYPE	D ⁽²⁾
1/2"	100	—	CUT FROM H200X100X5.5X8	PCL-A-1/2B	80
3/4"	100	—		PCL-A-3/4B	80
1"	100	—		PCL-A- 1B	80
1 1/2"	100	—		PCL-A-1 1/2B	80
2"	100	—		PCL-A- 2B	80
2 1/2"	100	—		PCL-A-2 1/2B	80
3"	100	—		PCL-A- 3B	180
4"	100	—		PCL-A- 4B	180
5"	100	—		PCL-A- 5B	180
6"	130	9	CUT FROM H200X200X8X12	PCL-A- 6B	—
8"	130	9		PCL-A- 8B	—
10"	130	9		PCL-A- 10B	—
12"	130	9		PCL-A- 12B	—
14"	130	9		PCL-A- 14B	—
16"	250	12	FAB. FROM 12 ^t PLATE	PCL-A- 16B	—
18"	250	12		PCL-A- 18B	—
20"	250	12		PCL-A- 20B	—
24"	300	12		PCL-A- 24B	—

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

67-3/4B-A-130-500

DENOTE TYPE NO.

DENOTE LINE SIZE

MODIFY LOPS=500 (IN mm) IF ANY

MODIFY HOPS=130 (IN mm) IF ANY

SEE NOTE 4

2. LONGITUDINAL LENGTH OF PIPE SHOE (SAY LOPS) SHALL BE CALCULATED IN CASE WITH PIPE STOP.

3. NON-ASBESTOS GASKET IS USED FOR ALLOY STEEL AND STAINLESS STEEL LINES.
(MAX. LINE TEMP. : 371°C)

4. REF. SH'T D-80A TABLE "A"

5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.



中鼎工程股份有限公司

CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-67

(1 OF 2)

ENGINEERING STANDARD

D7TS-701-E

D-81

REV.
1BY
DATECHK.
APPR.