


FOR LINE SIZE 26"—42"

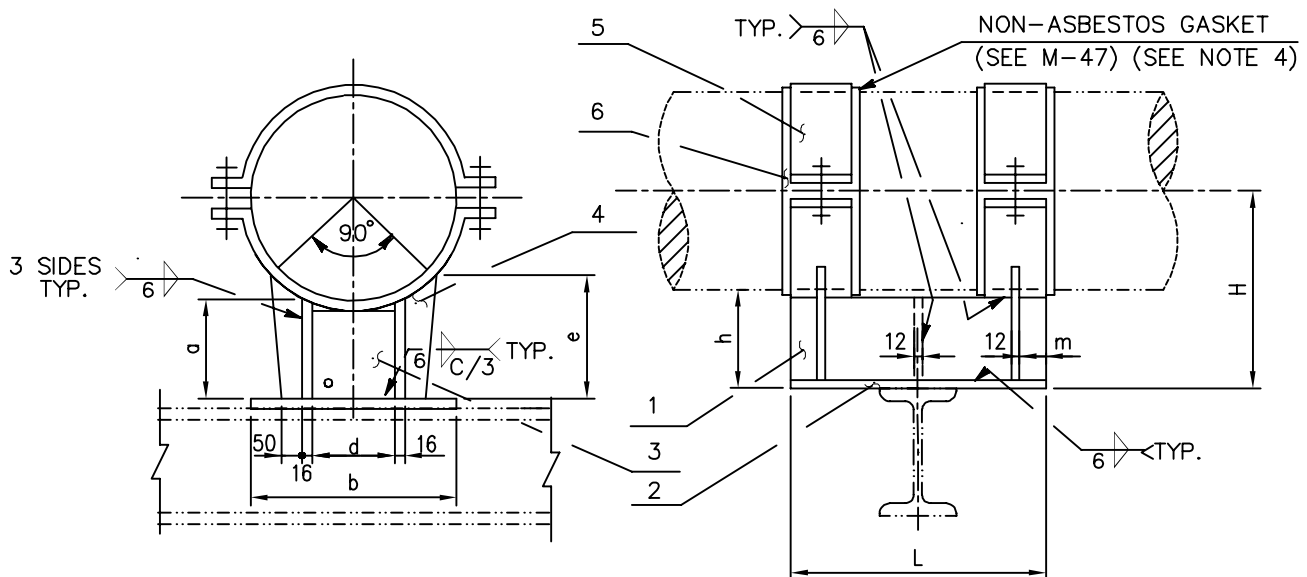

DIMENSIONS (mm)

NO.	1			2	3	4	5	6	DIMENSION												
PIECE	2			1	1	4	2	2													
PIPE SIZE	FOOT a			FOOT PLATE	PLATE	PLATE	CLAMP (NOTE3)	NON-ASBESTOS GASKET													
	A (NOTE 2)	B (NOTE 2)	C (NOTE 2)						b	d	e (NOTE 2)			h (NOTE 2)			H (NOTE 2)			L	m
											A	B	C	A	B	C	A	B	C		
26"	148	198	298	16 TH'K	12 TH'K	12 TH'K	FAB. FROM 12t LP	1.5t TH'K	430	230	222	272	372	150	200	300	480	530	630	540	35
28"	148	198	298						440	240	230	280	380	150	200	300	506	556	656	540	35
30"	148	198	298						450	250	237	287	387	150	200	300	531	581	681	540	35
32"	148	198	298						460	260	244	294	394	150	200	300	556	606	706	540	35
36"	152	202	302						500	300	259	309	409	150	200	300	607	657	757	540	35
40"	156	206	306						535	335	274	324	424	150	200	300	658	708	808	540	35
42"	156	206	306						550	350	281	331	431	150	200	300	683	733	833	540	35

NOTES : (FOR SH'T D-81A ONLY)

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

67-30B-A-130-500

DENOTE TYPE NO. ————
 DENOTE LINE SIZE ————
 ———— MODIFY LOPS=500 (IN mm) IF ANY
 ———— MODIFY HOPS=130 (IN mm) IF ANY
 ———— SEE NOTE 2

2. TYPE-A FOR INSULATION THICKNESS ≤ 100 TYPE-B FOR INSULATION THICKNESS > 100 AND ≤ 150 TYPE-C FOR INSULATION THICKNESS > 150 OR SPECIAL USED

3. FOR CLAMP DETAIL SEE SH'T M-56.

4. NON-ASBESTOS GASKET IS USED FOR ALLOY STEEL AND STAINLESS STEEL LINES.
(MAX. LINE TEMP. : 371°C)

5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.



中鼎工程股份有限公司

CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-67

(2 OF 2)

ENGINEERING STANDARD

D7TS-701-E

D-81A

REV.
1BY
DATECHK.
APPR.