



FOR LINE SIZE 26"-42"

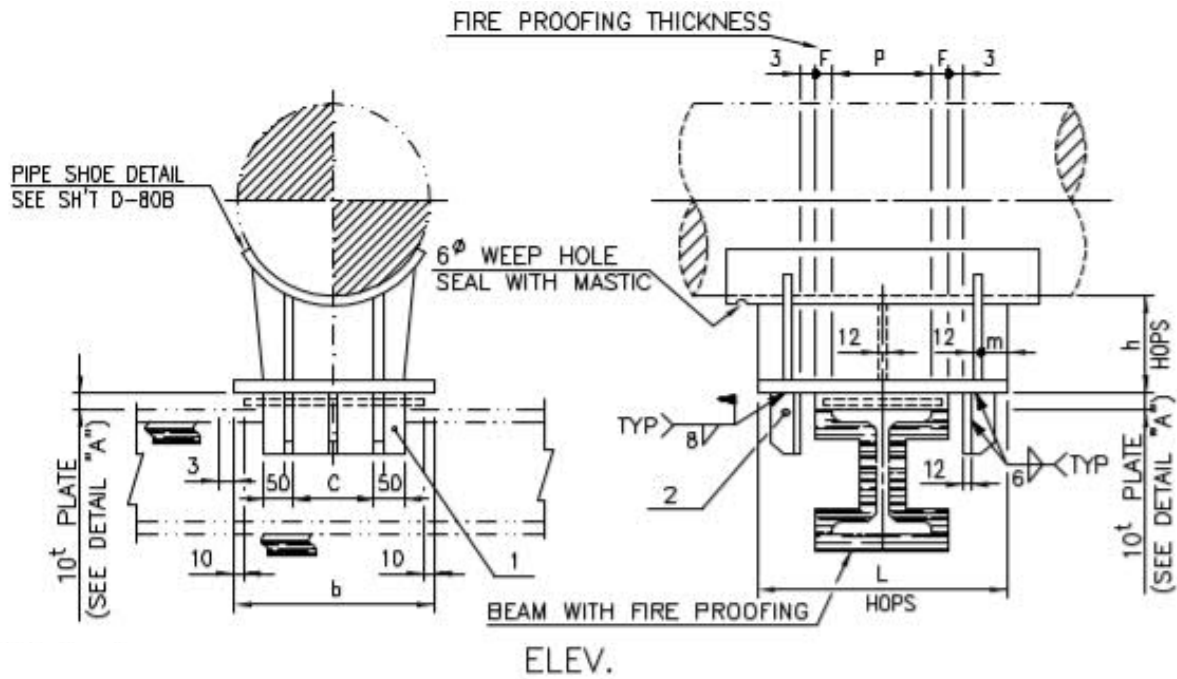

NO.	1	2	
PIECE	2	6	
PIPE SIZE	PLATE	PLATE	C
26"	12 THK	12 THK	230
28"			240
30"			250
32"			260
36"			300
40"			335
42"			350

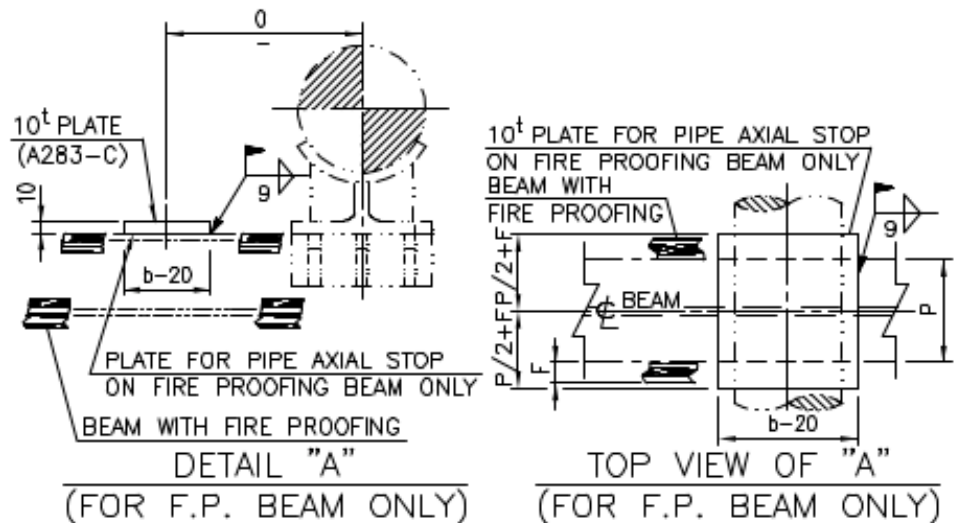

1. FOR DIMENSIONS AND INFORMATION NOT SHOWN ON THIS DWG. SEE SH'T D-80B.

2. DESIGNATION NUMBER DENOTE AS FOLLOW :

80-30B-A(A)-130-500

DENOTE TYPE NO. | | | | |
DENOTE LINE SIZE | | | | |
SEE NOTE 3 | | | | | SEE SH'T D-80A TABLE "B"

MODIFY LOPS=500 (IN mm) IF ANY
MODIFY HOPS=130 (IN mm) IF ANY

3. TYPE-A FOR INSULATION THICKNESS ≤ 100

TYPE-B FOR INSULATION THICKNESS $> 100 \leq 150$

TYPE-C FOR INSULATION THICKNESS > 150 OR SPECIAL USED

4. LOADING CONDITION : CARBON STEEL SADDLE WITH MAX. LINE TEMPERATURE 371°C

5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT

TYPE-80

(2 OF 2)

ENGINEERING STANDARD

D7TS-701-E

D-96

REV.
1

BY
DATE

CHK.
APPR.