


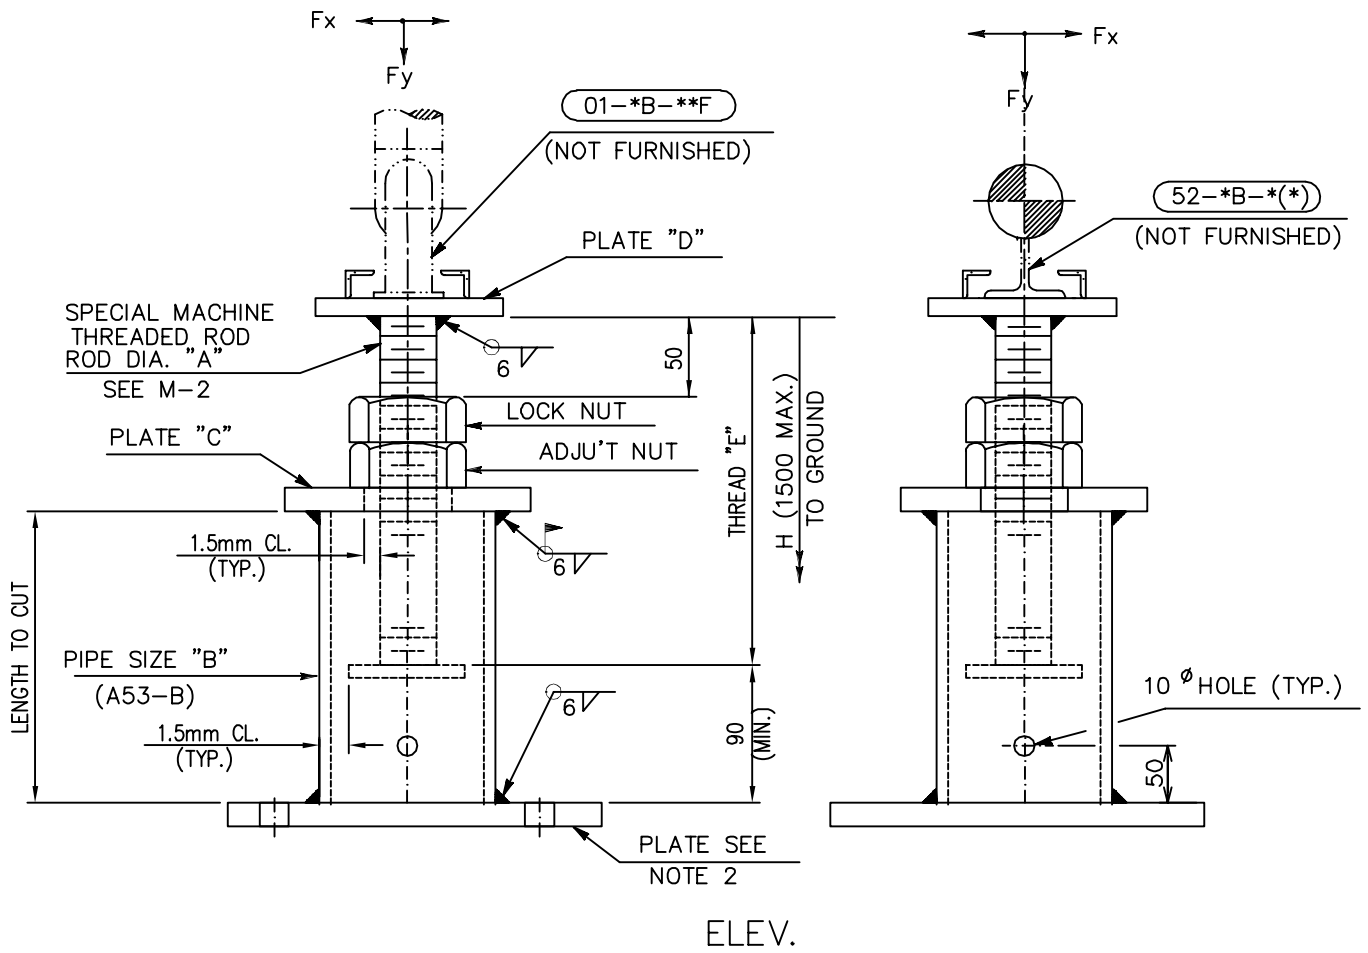

DIMENSIONS (mm)

A	B	C	D	E
1"	3"STD	120X120X9 ^t	210X210X9 ^t	190
1 1/2"	4"STD	150X150X9 ^t	290X290X9 ^t	215
2"	6"STD	200X200X12 ^t	290X290X12 ^t	245
2 1/2"	8"STD	250X250X16 ^t	390X390X16 ^t	275

NOTES :

1. DIMENSION "H" SHALL BE CUT TO SUIT IN FIELD.
2. THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL USE TYPE-G, T & R ONLY.
3. DESIGNATION NUMBER DENOTE AS FOLLOWS :

87-1-10G
 DENOTE TYPE NO. DENOTE THE LOWER COMPONENT TYPE SEE M-42
 DENOTE ROD SIZE "A" DENOTE DIMENSION "H" (IN 100mm)

4. IF THE LOWER COMPONENT TYPE-G IS USED, DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.



中鼎工程股份有限公司
CTCI CORPORATION

DETAIL OF PIPE SUPPORT
TYPE-87

ENGINEERING STANDARD

D7TS-701-E

D-108

REV.
1

BY
DATE

CHK.
APPR.