


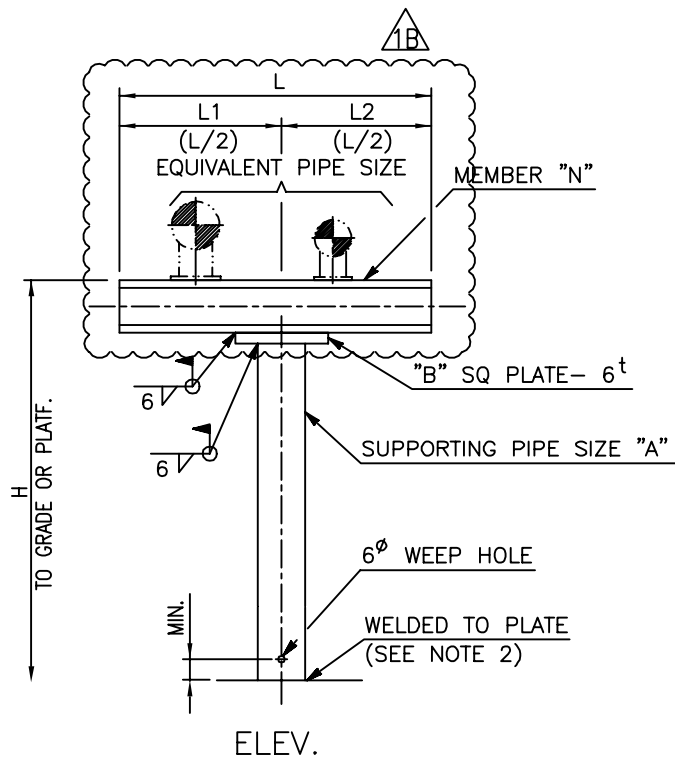

DIMENSIONS (mm)

PIPE SIZE "A"	L (MAX.)	H (MAX.)	K	M	B	MEMBER "N"
3" SCH.40	500	1500	70	160	110	C100X50X5
3" SCH.40	500	2500 (NOTE4)	70	160	110	C100X50X5
4" SCH.40	800	2500	85	185	135	C125X65X6

NOTES:

- DIMENSION "H" & "L" SHALL BE CUT TO SUIT IN FIELD.
- THIS TYPE SHALL BE USED WITH M-42 TO DETERMINE THE LOWER COMPONENT TYPE. IN THIS DETAIL, USE TYPE-G, R, T ONLY.
- DESIGNATION NUMBER DENOTE AS FOLLOWS:
08-2B-1005T-0208

08	2B	1005	T	0208
				1B

———— MODIFY DIMENSION "L2" (IN 100mm) IF ANY
 ———— MODIFY DIMENSION "L1" (IN 100mm) IF ANY
 ———— DENOTE THE LOWER COMPONENT TYPE SEE M-42
 ———— DENOTE DIMENSION "H" (IN 100mm) (SEE NOTE 4)
 ———— DENOTE DIMENSION "L" (IN 100 mm)
 ———— DENOTE SUPPORTING PIPE SIZE "A"
 ———— DENOTE TYPE NO.
- ONLY FOR 2" OR SMALLER SINGLE LINE IF $1500 < H \leq 2500$
- IF THE LOWER COMPONENT TYPE-G IS USED. DIMENSION "H" SHALL BE COUNTED FROM THE ELEVATION OF THE LOWEST POINT OF PAVING.
- ALL WELDED CONNECTIONS SHALL BE MADE WITH 6mm FILLET WELDS, BUT FOR ALL WELDS WITH PIPE, THE WELDING THICKNESS SHALL NOT EXCEED THE THICKNESS OF PIPE UNLESS OTHERWISE NOTED.

D-008M.DWG



中鼎工程股份有限公司
俊鼎機械廠股份有限公司

DETAIL OF PIPE SUPPORT

TYPE-08

(1 OF 1)

ENGINEERING STANDARD

STM-05.01

D-8

REV.
1BBY
DATECHK.
APPR.