

## ASSIGNMENT – 4

### Ultrasonic sensor simulation in Wokwi

Name	Shanmathi. G
Team ID	PNT2022TMID42649
Project Name	IoT Based Safety Gadget For Child Safety Monitoring And Notification
Marks	2 Marks

#### QUESTIONS:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribtopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
```

```

pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
    digitalWrite(trigPin, LOW);
    delayMicroseconds(2);
    digitalWrite(trigPin, HIGH);
    delayMicroseconds(10);
    digitalWrite(trigPin, LOW);
    duration = pulseIn(echoPin, HIGH);
    distance = duration * SOUND_SPEED/2;
    Serial.print("Distance (cm): ");
    Serial.println(distance);
    if(distance<100)
    {
        Serial.println("ALERT!!");
        delay(1000);
        PublishData(distance);
        delay(1000);
        if (!client.loop()) {
            mqttconnect();
        }
    }
    delay(1000);
}
void PublishData(float dist) {
    mqttconnect();
    String payload = "{\"Distance\":";
    payload += dist;
    payload += ", \"ALERT!!\": \"Distance less than 100cms\"";
    payload += "}";
    Serial.print("Sending payload: ");
    Serial.println(payload);

    if (client.publish(publishTopic, (char*) payload.c_str())) {
        Serial.println("Publish ok");
    }
    else {
        Serial.println("Publish failed");
    }
}

```

```


void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnect
ing client to ");
Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print("."); delay(500);
}
initManagedDevice();
Serial.println();
} }
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6); while
(WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() { if
(client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
} }
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i=0;i< payloadLength; i++) {
//Serial.print((char)payload[i]); data3 +=
(char)payload[i];
}
Serial.println("data: "+ data3); data3="";
}

```

## .json CODE:

```
WOKWI SAVE SHARE ♥
esp32-dht22.ino diagram.json libraries.txt Library Manager
1 {
2   "version": 1,
3   "author": "Shanmathi. G",
4   "editor": "wokwi",
5   "parts": [
6     { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 0, "left": 0, "attrs": {} },
7     { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": -27.03, "left": 166.83, "attrs": {} }
8   ],
9   "connections": [
10    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
11    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
12    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h0" ] ],
13    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h0" ] ],
14    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h0" ] ],
15    [ "esp:VIN", "ultrasonic1:VCC", "red", [ "h-15.5", "v48.2", "h245.33" ] ]
16  ]
17 }
```

## CIRCUIT DIAGRAM:

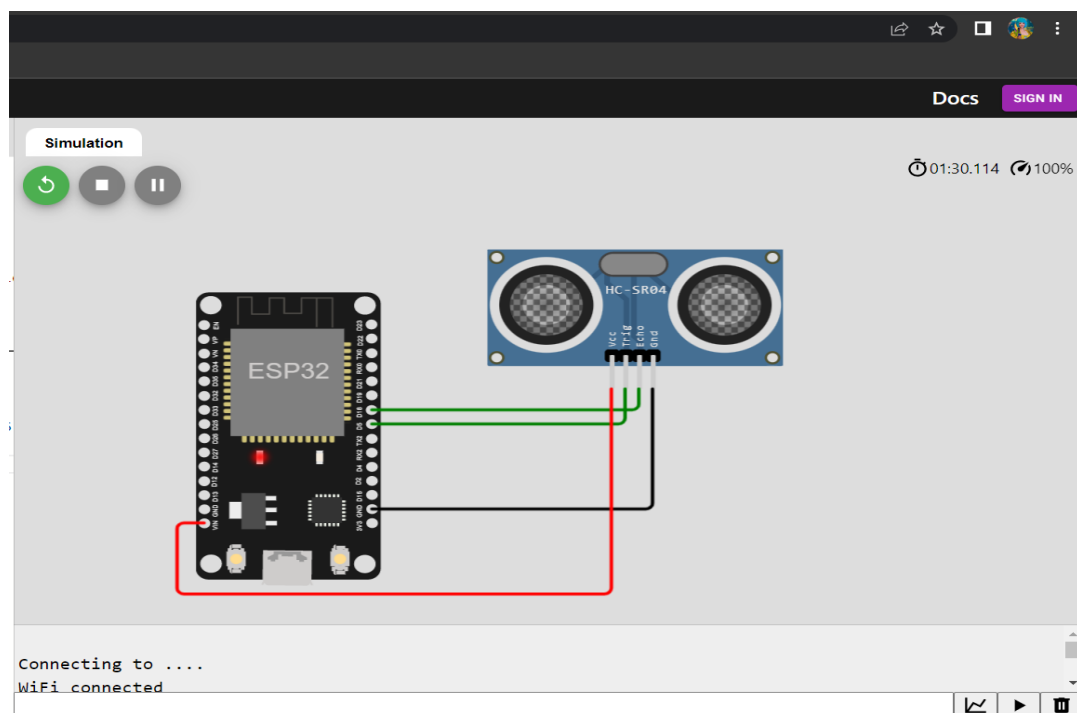

## Wokwi simulation link:

<https://wokwi.com/projects/347022444794479187>

## WOKWI OUTPUT:

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

## IBM CLOUD OUTPUT:

Event	Value	Format	Last Received
-------	-------	--------	---------------

event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago