
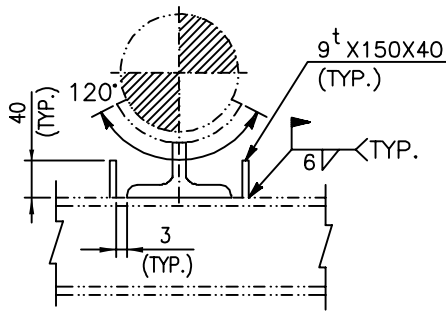
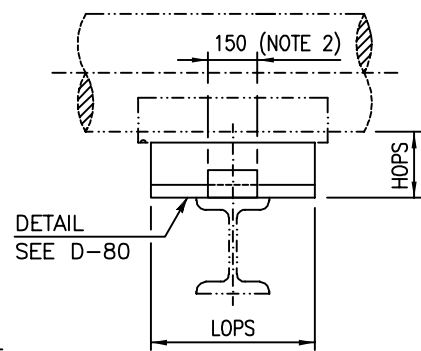
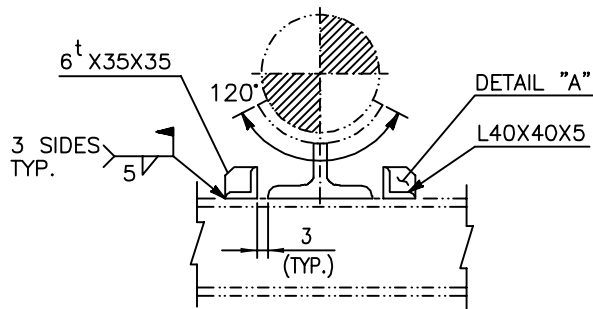
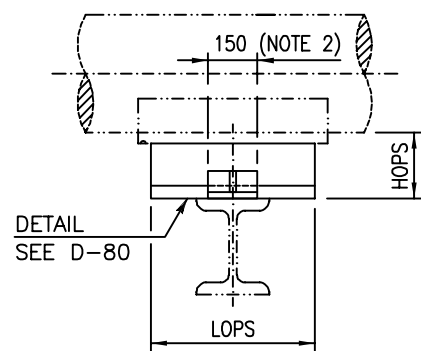


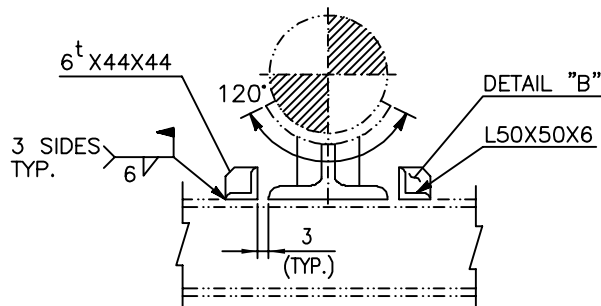

4" &amp; SMALLER



DETAIL  
SEE D-80

6" &amp; 8"


DETAIL  
SEE D-80

10" &amp; 24"

ELEV.

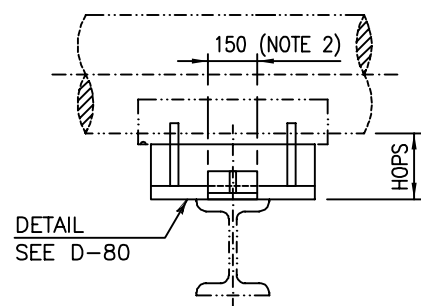DETAIL  
SEE D-80

DETAIL "A"



DETAIL "B"

NOTES : (FOR SH'T D-64 ONLY)

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

53-2B(P)-A(A)-130-500

DENOTE TYPE NO. \_\_\_\_\_

DENOTE LINE SIZE \_\_\_\_\_

MODIFY LOPS=500 (IN mm) IF ANY

MODIFY HOPS=130 (IN mm) IF ANY

SEE SH'T D-80A TABLE "B", SEE NOTE 4.

SEE SH'T D-80A TABLE "A"

DENOTE REIN. PAD IS REQ'D, SEE NOTE 4.

2. THE MAX. LENGTH OF THIS MEMBER SHALL NOT EXCEED THE WIDTH OF BEAM.

3. HOPS=HEIGHT OF PIPE SHOE  
LOPS=LENGTH OF PIPE SHOE

4. FOR ALLOY STEEL, STAINLESS STEEL &amp; STRESS RELIEF LINES, PAD SHALL BE FABRICATED WITH MAIN LINES IN SHOP WITH SAME MATERIAL AS MAIN LINES, AND THE PAD MATERIAL IS MATERIAL TAKE OFF BY PIPING ISO DWG.