



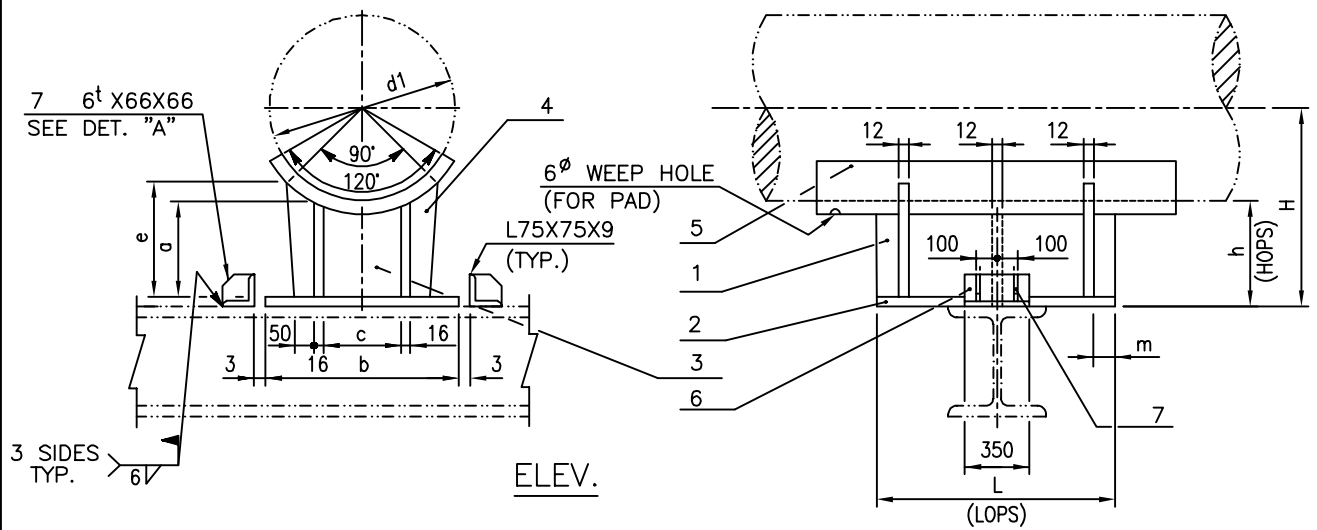

NO.	6	7
PIECE	2	4
PIPE SIZE	GUIDE	STIFF PLATE
26"	L75X75X9	6 ^t X66X66
28"		



DETAIL "A"

NOTES : (FOR SH'T D-64A ONLY)

1. FOR DIMENSIONS AND INFORMATION NOT SHOWN ON THIS DWG. SEE SH'T D-80B.

2. DESIGNATION NUMBER DENOTE AS FOLLOWS :

53-26B-A(A)-130-500

DENOTE TYPE NO.

DENOTE LINE SIZE

MODIFY LOPS=500 (IN mm) IF ANY
 MODIFY HOPS=130 (IN mm) IF ANY
 SEE SH'T D-80A TABLE "B"
 SEE NOTE 3.

3. TYPE-A FOR INSULATION THICKNESS ≤ 100, HOPS=150 EXCEPT MODIFIED.

TYPE-B FOR INSULATION THICKNESS > 100 ≤ 150, HOPS=200 EXCEPT MODIFIED.

4. LOADING CONDITION: CARBON STEEL SADDLE WITH MAX. PIPE TEMPERATURE 370°C & PRESSURE 300 PSI.

5. HOPS=HEIGHT OF PIPE SHOE, LOPS=LENGTH OF PIPE SHOE.

6. FOR ALLOY STEEL, STAINLESS STEEL & STRESS RELIEF LINES, PAD SHALL BE FABRICATED WITH MAIN LINES IN SHOP WITH SAME MATERIAL AS MAIN LINES, AND THE PAD MATERIAL IS MATERIAL TAKE OFF BY PIPING ISO DWG.