


PORTION	TYPE	ACCESSORY M-NO.	REF. TO ITT GRINNELL FIG. NO.	PIPE SIZE RANGE	MAX. TEMP. (°C)	MAX. INSU. THICK (IN.)	REMARKS
UP	FIG.-A	M-31	60				
	FIG.-C	M-28	66		399		
	FIG.-D	M-28	66		399		
LOW	FIG.-P	M-24	299	4" ~ 12"	399		
	FIG.-Q	M-24	299	4" ~ 12"	399		

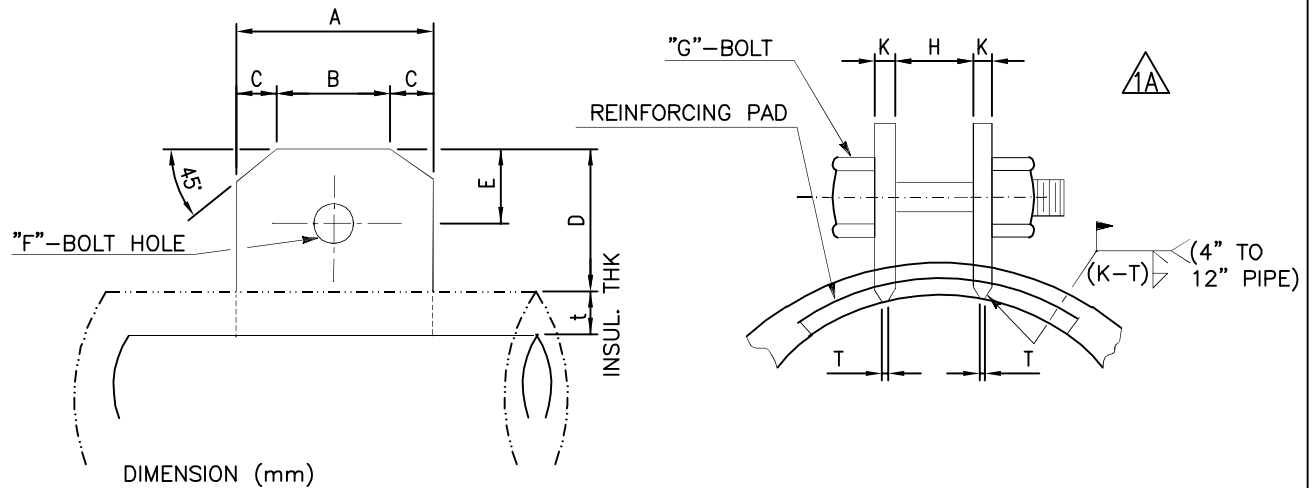

TYPE	A	B	C	D	E	F	H	K	T	G	
LGP-A-4B	130	70	30	90	30	24	40	9	4	M22	X 90
LGP-A-6B	160	90	35	100	35	28	50	9	4	M24	X 100
LGP-A-8B	160	90	35	100	35	28	50	9	4	M24	X 100
LGP-A-10B	160	90	35	100	35	28	50	9	4	M24	X 100
LGP-A-12B	160	90	35	100	35	28	50	9	4	M24	X 100

DETAIL "Z"

NOTES :

1. DESIGNATION NUMBER DENOTE AS FOLLOWS :

62-4B-M16-05~30D-P(T)

DENOTE TYPE NO.

DENOTE LINE SIZE

DENOTE ROD SIZE

- DENOTE WITH TURNBUCKLE

- DENOTE LOWER PART "J"

- DENOTE UPPER PART "D"

- DENOTE DIMENSION "H" (IN 100mm)

2. FOR WELDING SIZE, SEE M-28.

3. TURNBUCKLE SHALL BE USED IN ONE OF THE FOLLOWING CASES:

- (a) DIM. "H" LARGER THAN 2000MM.

- (b) THE UPPER PART FIG. -D IS IN HANGER COMBINATION.

4. IF FIG.—D IS CHOSEN COMBINATION WITHOUT TURNBUCKLE , A LEFT—HAND THREADED WELDLESS EYE NUT SHALL BE USED.

5. NON-ASBESTOS GASKET IS USED FOR NOT WELDABLE PIPE, GALV., LINED LINE OR STAINLESS STEEL LINE. (LINE TEMP.: 205°C, AND SHORT TERM LINE TEMP.:370°C.)