

## ASSIGNMENT – 4

Ultrasonic sensor simulation in  
Wokwi

Name	Anbalagan.A
Date	31 October 2022
Team ID	PNT2022TMID42660
Project Name	Real-Time River Water Quality Monitoring and Control System.

### QUESTIONS:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events

### CODE:

```
#include <WiFi.h>
#include
<PubSubClient.h>
void callback(char* subscribetopic, byte* payload,
unsigned int payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson
IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT
Platform #define TOKEN "12345678" //Token
String data3;
char server[] = ORG
".messaging.internetofthings.ibmcloud.com"; char
publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] =
"iot-2/cmd/test/fmt/String"; char authMethod[]
```

```

= "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback
,wifiClient); const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED
0.034 long duration;
float
distance;
void
setup()
Serial.be
gin(11520
0);
pinMode(
trigPin,
OUTPUT
);
pinMode(
echoPin,
INPUT);
wificonne
ct();
mqttconn
ect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin,
HIGH);
distance = duration *
SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);

```

```

if(distance<100)
{
  Serial.println("ALERT
!!"); delay(1000);
  PublishData(distance);
  delay(1000);
  if
  (!client.loop())
  {
    mqttconnect();
  }
}
delay(1000);
}

void PublishData(float
dist) { mqttconnect();
String payload =
"{\"Distance\": "; payload +=
dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than
100cms\""; payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
  Serial.println("Publish ok");
} else {
  Serial.println("Publish failed");
}
}

void mqttconnect() {
if (!client.connected())
  Serial.print("Reconnecting client to ");
  Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
  Serial.print(
  ".");
  delay(500);
}
}

```

```

initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST",
"", 6);
while (WiFi.status() !=
WL_CONNECTED) { delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi
connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
;
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[
i]); data3 +=
(char)payload[i];
}
}


```

```
Serial.println("data: "+  
data3); data3="";  
}
```

## .json CODE:

```
sketch.ino  diagram.json  libraries.txt  Library Manager  ▼
1  {
2    "version": 1,
3    "author": "anbalagan",
4    "editor": "wokwi",
5    "parts": [
6      { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 34.94, "left": -132.61, "attrs": {} },
7      { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17, "attrs": {} }
8    ],
9    "connections": [
10     [ "esp:TX0", "$serialMonitor:RX", "", [] ],
11     [ "esp:RX0", "$serialMonitor:TX", "", [] ],
12     [
13       "esp:VIN",
14       "ultrasonic1:VCC",
15       "red",
16       [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
17     ],
18     [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
19     [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
20     [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
21   ]
22 }
```

## CIRCUIT DIAGRAM:

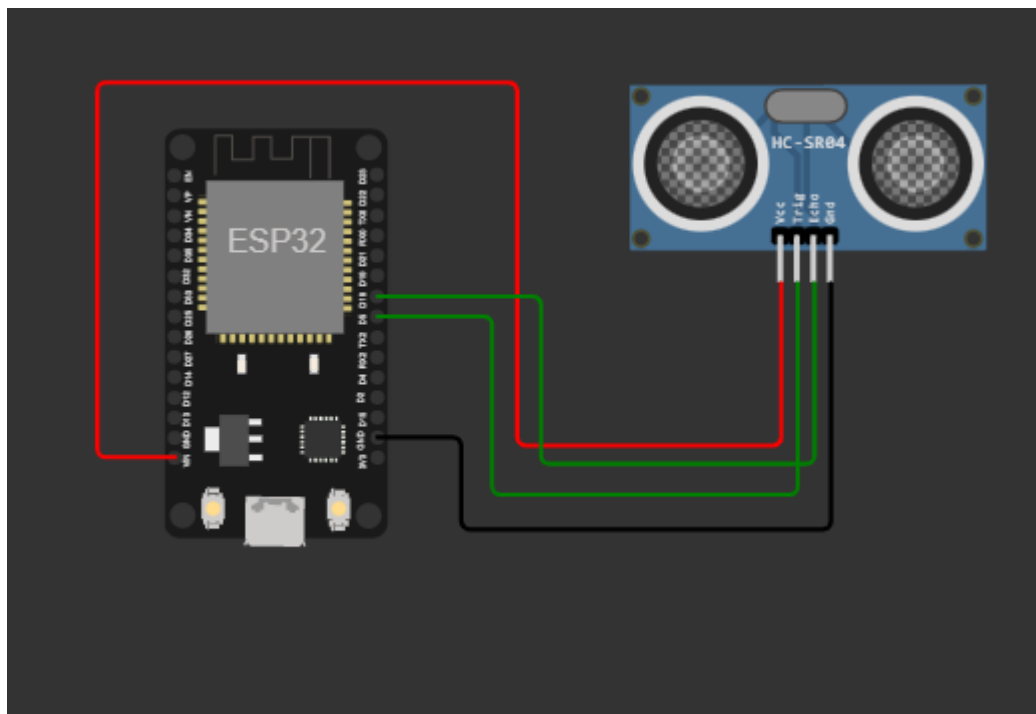

**Wokwi simulation link:**

<https://wokwi.com/projects/347020612138435155>

**WOKWI OUTPUT:**

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

### IBM CLOUD OUTPUT:

BrowseActionDevice TypesInterfaces

Add Device+

IdentityDevice InformationRecent EventsStateLogsX

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago