


SERVICE TEMP:-9°C TO -254°C

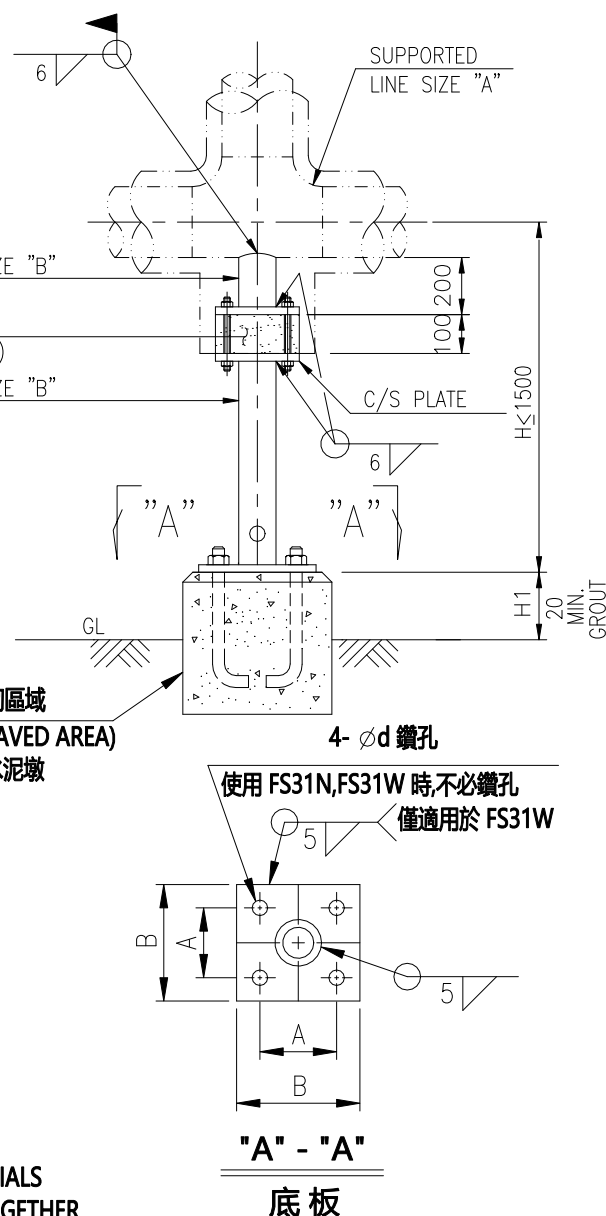

1. FOR ALLOY STEEL,STAINLESS STEEL&STRESS RELIEF LINES,THE MATERIALS SHALL BE THE SAME AS MAIN LINES,AND IT SHALL BE FABRICATED TOGETHER WITH MAIN LINES IN SHOP.

2. 管支撐 FS31A, FS31E 包括水泥墩製作
3. FS31A: 適用於基礎螺栓固定, FS31E: 適用於螺栓固定 適用於擴展螺栓固定
FS31N: 不固定 W: 適用於焊接固定
4. 稱呼代號:
- FS31 □ - □ - □ H - □ H1
- 水泥墩高度
管支撐高度
配管管徑
固定方式 (A, B, E, N, W)
5. DESIGNATION "H" SHALL BE CUT TO SUIT IN FIELD
6. MAT'L OF STUD BOLT :A193 GR. B8 W/2 A194 GR. 8A NUTS.
7. 管支撐底板, 水泥墩螺栓數量及基準請參照設計基準

益高工程有限公司
E-KO ENGINEERING., LTD

DETAIL OF COLD SUPPORT
保冷配管支撐

BY	CHK.	APP.	DATE	CONTRACT	DWG. NO. FS31	SH'T NO. 1 OF 2	REV. 
----	------	------	------	----------	------------------	--------------------	---

DIMENSIONS (mm)

LINE SIZE "A"	PIPE SIZE "B"	SPACER PLATE					BASE PLATE							BLOCK "N"
		C	D	E	G	J	底板 厚度	A	B	Ød	L型基 礎螺栓	螺栓 連帽	擴展螺栓 EB2-	
2"	1 1/2" SCH.80	90	140	6	16	1/2" X 145	9	110	180	19	M16x200L	M16x50L	M16x125L	2
3"	2" SCH.40	90	140	6	16	1/2" X 145	9	110	180	19	M16x200L	M16x50L	M16x125L	2
4"	3" SCH.40	130	200	6	16	1/2" X 145	9	110	180	19	M16x200L	M16x50L	M16x125L	3
6"	4" SCH.40	130	200	6	16	1/2" X 145	9	190	260	19	M16x200L	M16x50L	M16x125L	3
8"	6" SCH.40	170	250	9	19	5/8" X 165	9	190	260	19	M16x200L	M16x50L	M16x125L	4
10"	8" SCH.40	230	300	9	19	5/8" X 165	16	300	380	22	M20x250L	M20x55L	M20x150L	5
12"	8" SCH.40	230	300	9	19	5/8" X 165	16	300	380	22	M20x250L	M20x55L	M20x150L	5
14"	10" SCH.40	260	350	9	19	5/8" X 165	16	300	380	22	M20x250L	M20x55L	M20x150L	6
16"	10" SCH.40	260	350	9	19	5/8" X 165	16	300	380	22	M20x250L	M20x55L	M20x150L	6
18"	10" SCH.40	260	350	9	19	5/8" X 165	16	300	380	22	M20x250L	M20x55L	M20x150L	6

益高工程有限公司
E-KO ENGINEERING., LTD

DETAIL OF COLD SUPPORT
保冷配管支撐

BY	CHK.	APP.	DATE	CONTRACT	DWG. NO. FS31	SH'T NO. 2 OF 2	REV. 
----	------	------	------	----------	------------------	--------------------	---