



管線 4" (含) 以上安裝方式

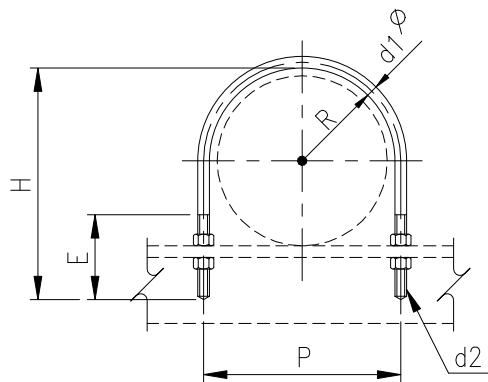

管線 4" 以下安裝方式

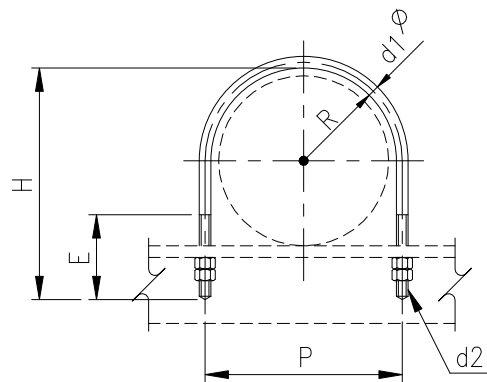

公稱管徑			R (mm)	H (mm)	P (mm)	E (mm)	d1 (mm)	螺紋 d2	
英制	JIS							ISO 英制	ISO 公制
3/8"	10A	3/8B	10	45	30	30	10	3/8-16UNC	M10
1/2"	15A	1/2B	12	47	34				
3/4"	20A	3/4B	15	53	40				
1"	25A	1B	18	60	46				
1.1/4"	32A	1.1/4B	23	68	56				
1.1/2"	40A	1.1/2B	26	74	62				
2"	50A	2B	32	86	74				
2.1/2"	65A	2.1/2B	40	108	92	35	12	1/2-13UNC	M12
3"	80A	3B	46	120	104				
3.1/2"	95A	3.1/2B	52	133	116				
4"	100A	4B	59	141	134	50	16	5/8-11UNC	M16
5"	125A	5B	73	169	162				
6"	150A	6B	86	194	188				
8"	200A	8B	112	251	244	60	20	3/4-10UNC	M20
10"	250A	10B	138	302	296				
12"	300A	12B	165	361	354	70	24	1-8UNC	M24
14"	350A	14B	181	394	386				
16"	400A	16B	207	444	438				
18"	450A	18B	233	505	496	85	30	1.1/4-8UNC	M30
20"	500A	20B	259	556	548				
24"	600A	24B	310	663	656	100	36	1.3/8-8UNC	M36

說明:

1. 適用於 ANSI 或 JIS 管徑

2. U-BOLT 材質為 A307 Gr.B 鍍鋅, 使用溫度不可超過 232° C (450°F)

3. 稱呼代號: UB1 —

公稱管徑

益高工程有限公司
E-KO ENGINEERING., LTD

U- BOLT
U 型 螺栓

BY

CHK.

APP.

DATE

CONTRACT

DWG. NO.

UB1

SH'T NO.

1 OF 1

REV.

