#### Assignment -4

Assignment Date	25 October 2022
Student Name	Ms. Silviya Rajathi D
Student Roll Number	113119UG03101

### Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cm send "alert" to ibm cloud and display in device recent events.


#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "hycgw4"
#define DEVICE_TYPE "Distance"
#define DEVICE_ID "Ultrasonic"
#define TOKEN "WD6Mb(-d2F+X0xWqnB"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/event2/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
const int trigpin=5;
const int echopin=18;
String command;
String data="";
long duration;
float dist;
void setup()
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
```


```
wifiConnect();
  mqttConnect();
}
void loop() {
  bool isNearby = dist < 100;</pre>
  digitalWrite(led, isNearby);
  publishData();
  delay(500);
  if (!client.loop()) {
   mqttConnect();
  }
}
void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: ");
Serial.println(WiFi.localIP());
void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    initManagedDevice();
   Serial.println();
  }
}
void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
   Serial.println("IBM subscribe to cmd OK");
  } else {
   Serial.println("subscribe to cmd FAILED");
  }
void publishData()
```

```
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin, HIGH);
  dist=duration*speed/2;
  if(dist<100){</pre>
    String payload = "{\"Alert!! Alert!! Distance\":";
    payload += dist;
    payload += "}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
    if (client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish OK");
    }
  }
    if(dist>100){
    String payload = "{\"Distance\":";
    payload += dist;
    payload += "}";
    Serial.print("\n");
    Serial.print("Sending payload: ");
    Serial.println(payload);
     if(client.publish(publishTopic, (char*) payload.c_str())) {
      Serial.println("Publish OK");
      Serial.println("Publish FAILED");
    }
  }
  }
```

# **Connections:**

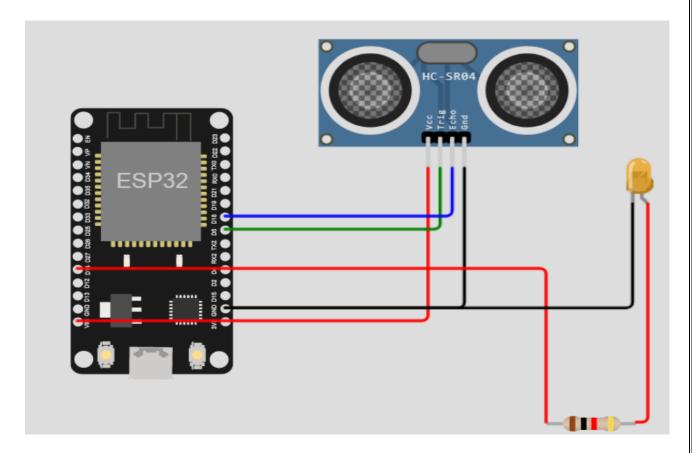



# **WOKWI AND IBM CLOUD CONNECTED:**

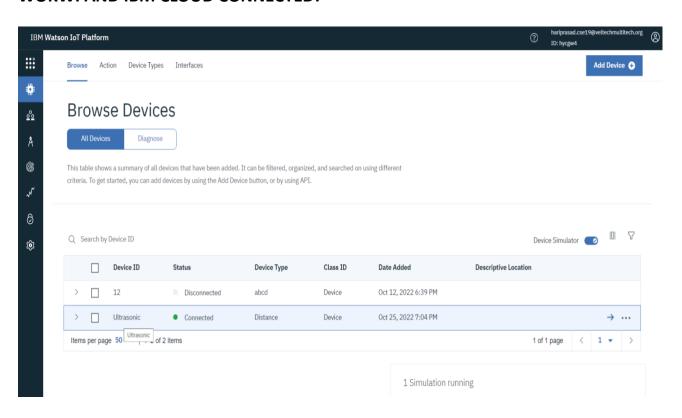

#### **OUTPUT:**


Distance = 95 cm
 Status = Alert Message

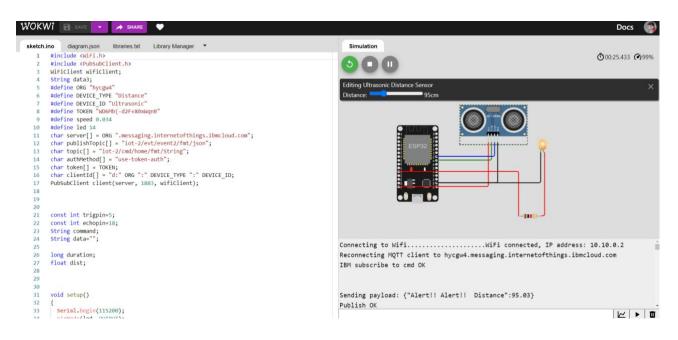


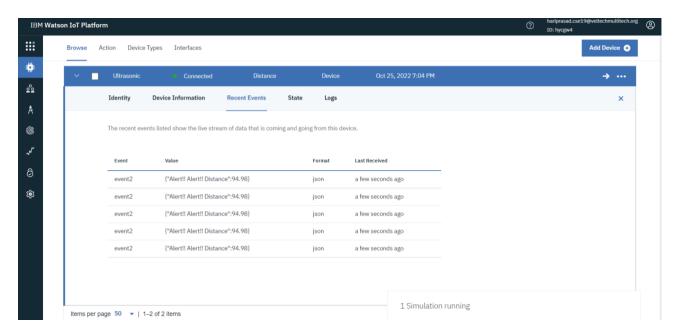


Wokwi data publishing to ibm cloud


## 2. Distance = 162 cm Status = Normal

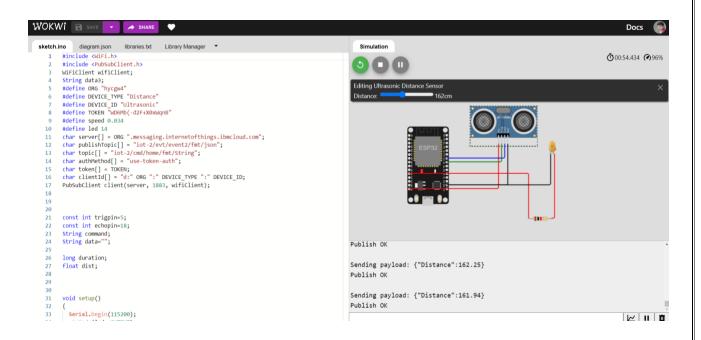

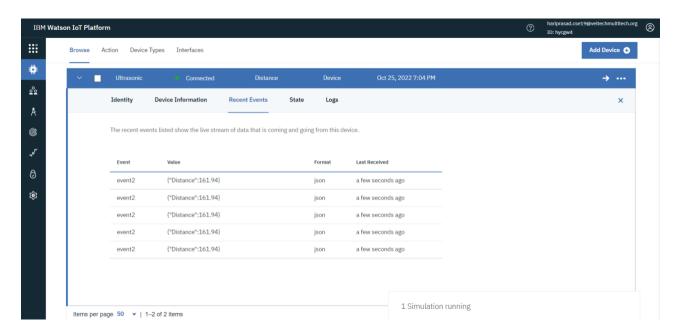

# 3. Distance = 27 cm Status = Alert Message

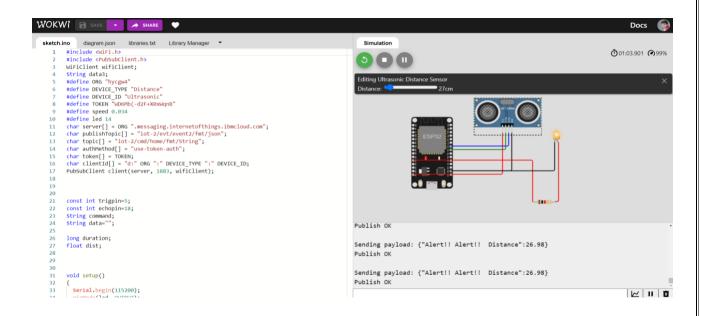

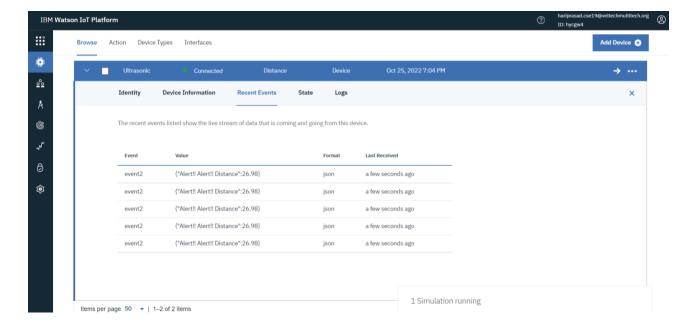

Reference link = https://wokwi.com/projects/346498745135792724