

## TEAM ID-PNT2022TMID03026

### Assignment - 4

#### Ultrasonic sensor simulation in Wokwi

##### Question-1:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

##### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "ytluse"//IBM ORGANITION ID
#define DEVICE_TYPE "2702"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "O+n)Eh+1NX0y3?rG!8" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);

  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
```

```

digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":\"";
payload += dist;
payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
payload += "\"}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}

void mqttconnect() {
if (!client.connected()) {
Serial.print("Reconnecting client to ");
Serial.println(server);
while (!!!client.connect(clientId, authMethod, token)) {
Serial.print(".");
delay(500);
}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {

```

```

delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}

```


Diagram.json:

```

{
  "version": 1,
  "author": "IRFANA FATHIMA A 19IT007",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 6, "left": -66, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 32.56, "left": 81.02, "attrs": {} } ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [ "esp:VIN", "ultrasonic1:VCC", "red", [ "h-31.67", "v-176.8", "h152", "v163.33" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h11.37", "v64.67", "h121.33" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h16.7", "v45.07", "h4" ] ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h8.7", "v14.7", "h138.67" ] ]
  ]
}

```

## Circuit Diagram:

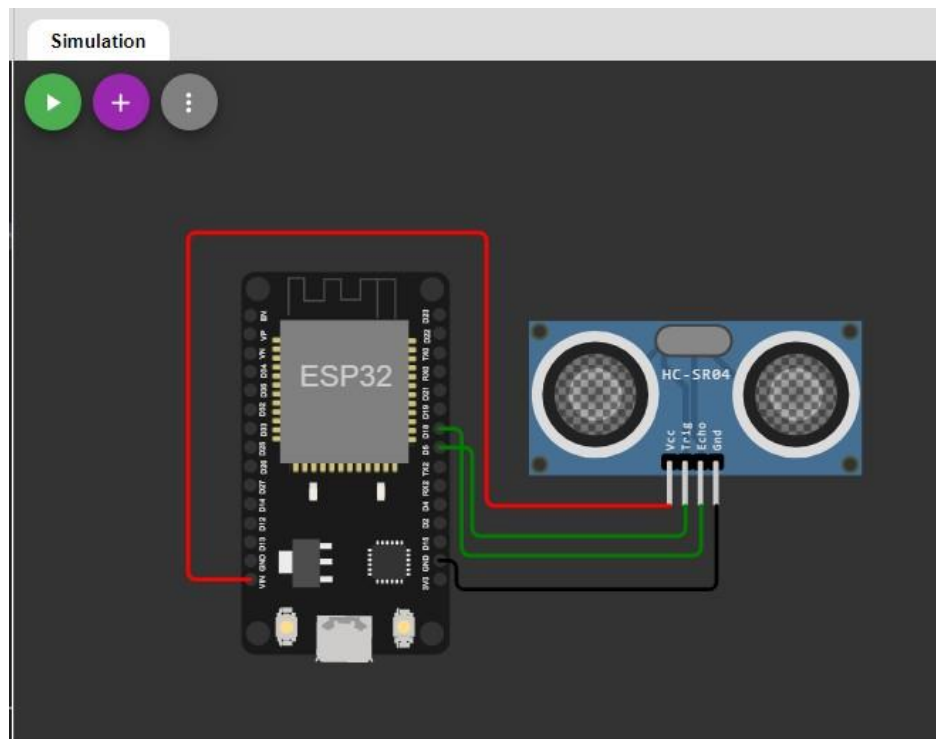


## Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

## IBM cloud output:

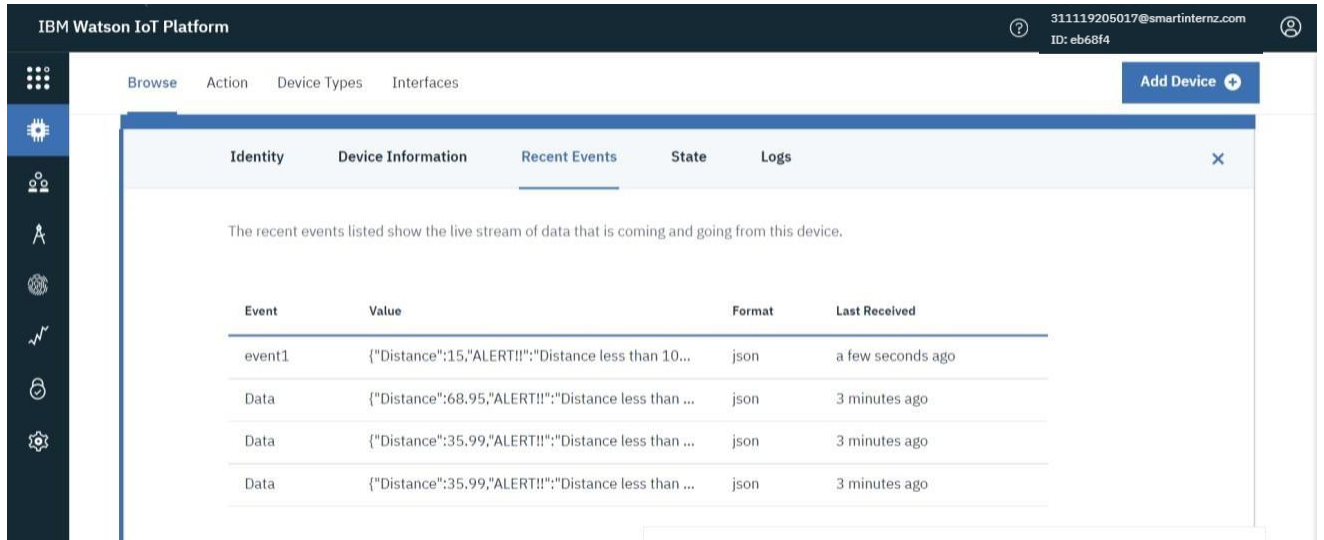

The screenshot displays the IBM Watson IoT Platform interface. The top navigation bar includes the platform name, a user profile icon, and the email address 311119205017@smartinternz.com with ID: eb68f4. The main navigation menu on the left contains icons for various functions. The top navigation bar also includes links for 'Browse', 'Action', 'Device Types', and 'Interfaces', along with an 'Add Device' button. The 'Recent Events' tab is selected, showing a table of events. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. The events listed are 'event1', 'Data', 'Data', and 'Data', all in 'json' format. The 'Last Received' times are 'a few seconds ago' and '3 minutes ago'.

Event	Value	Format	Last Received
event1	{"Distance":15,"ALERT!!":"Distance less than 10...	json	a few seconds ago
Data	{"Distance":68.95,"ALERT!!":"Distance less than ...	json	3 minutes ago
Data	{"Distance":35.99,"ALERT!!":"Distance less than ...	json	3 minutes ago
Data	{"Distance":35.99,"ALERT!!":"Distance less than ...	json	3 minutes ago

## Wokwi simulation link:

<https://wokwi.com/projects/346382633340502612>