

Assignment - 4

Ultrasonic sensor simulation in Wokwi

Assignment Date	24 October 2022
Student Name	Swathi S
Team ID	PNT2022TMID03026
Maximum Marks	2 Marks

Question-1:

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribtopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "ytluse"//IBM ORGANITION ID
#define DEVICE_TYPE "2702"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "O+n)Eh+1NX0y3?rG!8" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribtopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);

  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
```

```

digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
    Serial.println("ALERT!!");
    delay(1000);
    PublishData(distance);
    delay(1000);
    if (!client.loop())
    {mqttconnect();
    }
}
delay(1000);
}

void PublishData(float dist)
{mqttconnect();
String payload = "{\"Distance\": ";
payload += dist;
payload += ", \"ALERT!!\": \"\" \"Distance less than 100cms\"";
payload += "}";
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
} else {
    Serial.println("Publish failed");
}
}

void mqttconnect() {
    if (!client.connected())
    { Serial.print("Reconnecting client to ");
      Serial.println(server);
      while (!!!client.connect(clientId, authMethod, token)) {
          Serial.print(".");
          delay(500);
      }
      initManagedDevice();
      Serial.println();
    }
}

void wificonnect()
{
    Serial.println();
    Serial.print("Connecting to ");
    WiFi.begin("Wokwi-GUEST", "", 6);
    while (WiFi.status() != WL_CONNECTED) {

```

```

delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic))
{Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}

```


Diagram.json:

```

{
  "version": 1,
  "author": "IRFANA FATHIMA A 19IT007",
  "editor": "wokwi",
  "parts": [
    { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 6, "left": -66, "attrs": {} },
    { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 32.56, "left": 81.02, "attrs": {} } ],
  "connections": [
    [ "esp:TX0", "$serialMonitor:RX", "", [] ],
    [ "esp:RX0", "$serialMonitor:TX", "", [] ],
    [ "esp:VIN", "ultrasonic1:VCC", "red", [ "h-31.67", "v-176.8", "h152", "v163.33" ] ],
    [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h11.37", "v64.67", "h121.33" ] ],
    [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h16.7", "v45.07", "h4" ] ],
    [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h8.7", "v14.7", "h138.67" ] ]
  ]
}

```

Circuit Diagram:

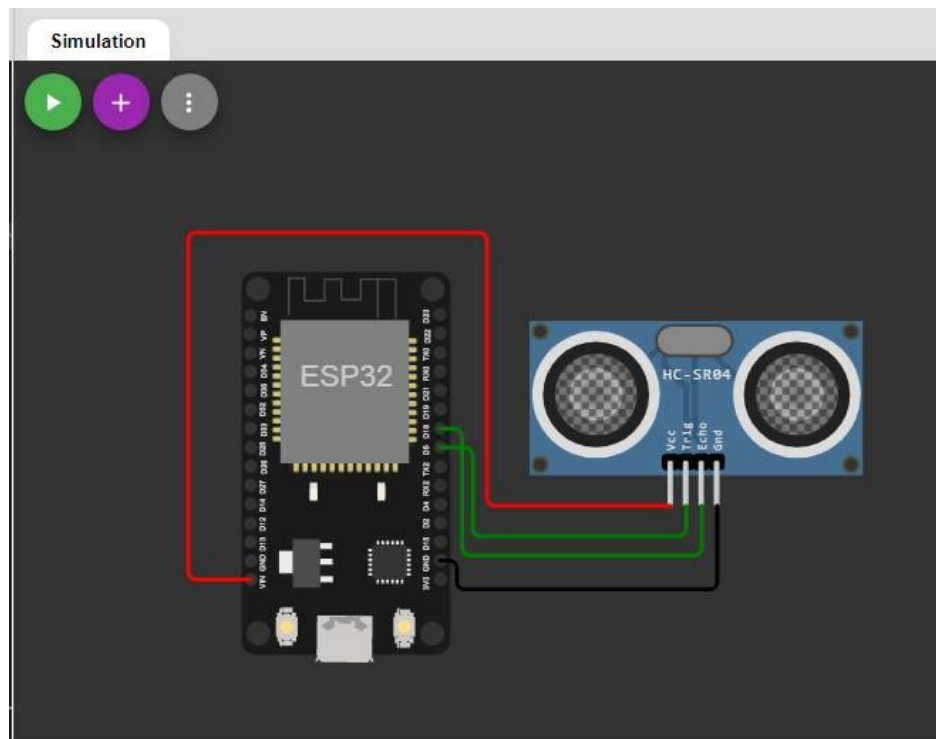


Output:

Wokwi output:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

IBM cloud output:

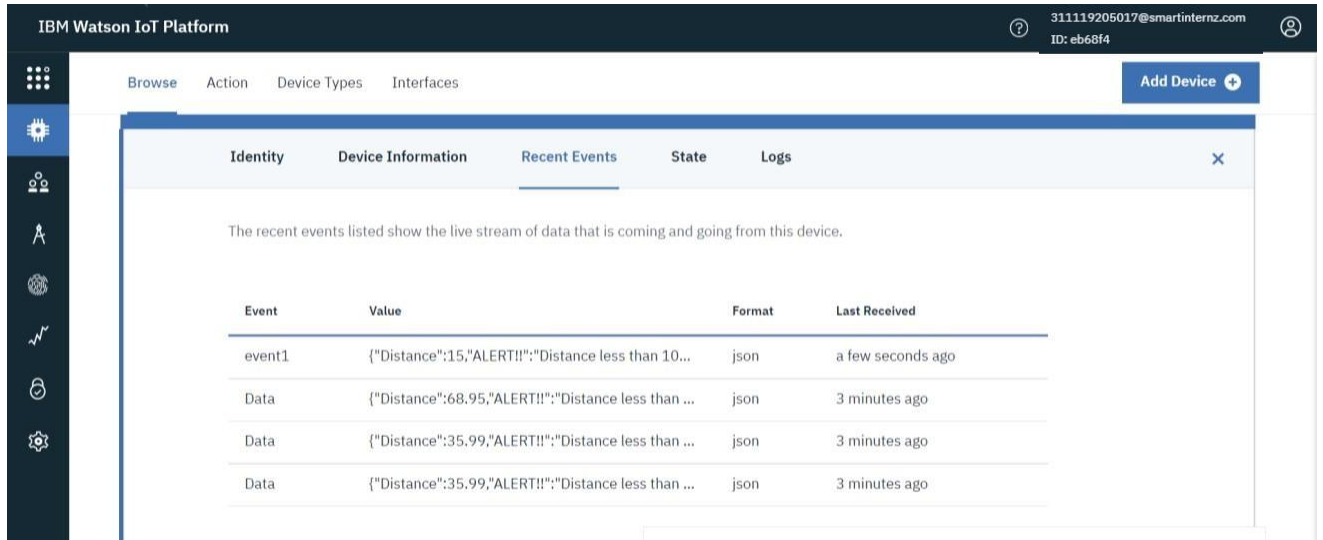

The screenshot displays the IBM Watson IoT Platform interface. The top navigation bar includes the platform name, a user profile icon, and the email address 311119205017@smartinternz.com with ID: eb68f4. The main navigation menu on the left contains icons for various functions. The top navigation tabs are 'Browse', 'Action', 'Device Types', and 'Interfaces'. A 'Add Device' button with a plus icon is located in the top right corner. The 'Recent Events' tab is selected, showing a table of events. The table has four columns: 'Event', 'Value', 'Format', and 'Last Received'. The first row shows 'event1' with a JSON value, 'json' format, and 'a few seconds ago' timestamp. The subsequent three rows show 'Data' events with similar JSON values, 'json' format, and '3 minutes ago' timestamps. A close button (X) is visible in the top right corner of the 'Recent Events' panel.

Event	Value	Format	Last Received
event1	{"Distance":15,"ALERT!!":"Distance less than 10...	json	a few seconds ago
Data	{"Distance":68.95,"ALERT!!":"Distance less than ...	json	3 minutes ago
Data	{"Distance":35.99,"ALERT!!":"Distance less than ...	json	3 minutes ago
Data	{"Distance":35.99,"ALERT!!":"Distance less than ...	json	3 minutes ago

Wokwi simulation link:

<https://wokwi.com/projects/346382633340502612>

