

Assignment -4
Python Programming

Assignment Date	25 October 2022
Team members	VELMURUGAN B(TL) SIVAMURUGAN G MARIYA SAMSON SANDEEP B KALI SATHISH N
Team ID	PNT2022TMID50691
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for ultrasonic sensor.

Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images of ibm cloud

Solution:

```
1 #include<WiFi.h>//library for wifi
2 #include<PubSubClient.h>//library for MQTT
3 void callback(char* subscribetopic, byte* payload,unsigned int payloadlength);
4 //-----credentials of IBM Account-----
5 #define ORG "izyy6o"// IBM ORGANIZATION ID
6 #define DEVICE_TYPE "iotdeviceproject"//DEVICE TYPE MENTIONED IN IOT WATSON PLATFORM
7 #define DEVICE_ID "229714"//DEVICE ID MENTIONED IN IOT WATSON PLATFORM
8 #define TOKEN "24681012"//Token
9 String data3;
10 float dist;
11 //-----customize the above value-----
12 char server[]=ORG ".messaging.internetofthings.ibmcloud.com";//server name
13 char publishtopic[]="ultrasonic/evt/Data/fmt/json";//*topic name and type of event perform
14 |and format in which data to be send*/
15 char subscribetopic[]="ultrasonic/cmd/test/fmt/String";//*cmd REPRESENT Command tupe and
16 COMMAND IS TEST OF FORMAT STRING*/
17 char authMethod[]="use-token-auth";//authentication method
18 char token[]=TOKEN;
19 char clientid[]="d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//CLIENT ID
20 //-----
21 WiFiClient wifiClient;// creating an instance for wificlient
22 PubSubClient client(server, 1883 , callback , wifiClient);//calling the predefined client id
23 by passing parameter like server id,portand wificredential*/
24 int LED =4;
25 int trig =5;
26 int echo=18;
27 void setup()
28 {
29   Serial.begin(115200);
30   pinMode(trig,OUTPUT);
```

← → ↻ wokwi.com/projects/346566226034557523

WOKWI SAVE SHARE

Docs

sketch.ino diagram.json libraries.txt Library Manager

```
31 pinMode(echo,INPUT);
32 pinMode(LED,OUTPUT);
33 delay(10);
34 wificonnect();
35 mqttconnect();
36 }
37 void loop()//recursive function
38 {
39   digitalWrite(trig,LOW);
40   digitalWrite(trig,HIGH);
41   delayMicroseconds(10);
42   digitalWrite(trig,LOW);
43   float dur=pulseIn(echo,HIGH);
44   float dist=(dur * 0.0343)/2;
45   Serial.print("distance in cm");
46   Serial.println(dist);
47   PublishData(dist);
48   delay(1000);
49   if (!client.loop()){
50     mqttconnect();
51   }
52 }
53 /*.....retriving to cloud.....*/
54 void PublishData(float dist){
55   mqttconnect();//function call for connecting to ibm
56   /*creating the string in form of JSON to update the data to ibm cloud*/
57   String object;
58   if(dist<100)
59   {
60     digitalWrite(LED,HIGH);
```

Co
nn
ec
ti
ng
to

← → ↻ wokwi.com/projects/346566226034557523


WOKWI SAVE SHARE

Docs

sketch.ino diagram.json libraries.txt Library Manager

```
61 Serial.println("no object is near");
62 object="Near";
63 }
64 else
65 {
66   digitalWrite(LED,LOW);
67   Serial.println("no object found");
68   object="No";
69 }
70 String payload="{\"distance\":";
71 payload +=dist;
72 payload +=",\" \"object\":\":";
73 payload += object;
74 payload += "\":";
75
76 Serial.print("Sending payload: ");
77 Serial.println(payload);
78 if(client.publish(publishtopic, (char*) payload.c_str())){
79   Serial.println("Publish ok");// if its sucessfully upload data on the cloud then it will print
80   publish ok in serial monitor or else it will print publish failed*/
81 } else{
82   Serial.println("Publish failed");
83 }
84 }
85 void mqttconnect(){
86   if(!client.connected()){
87     Serial.print("Reconnecting client to ");
88     Serial.println(server);
89     while(!client.connect(clientid,authMethod, token)){
90       Serial.print(".");
91       delay(500);
```

Co
nn
ec
ti
ng
to

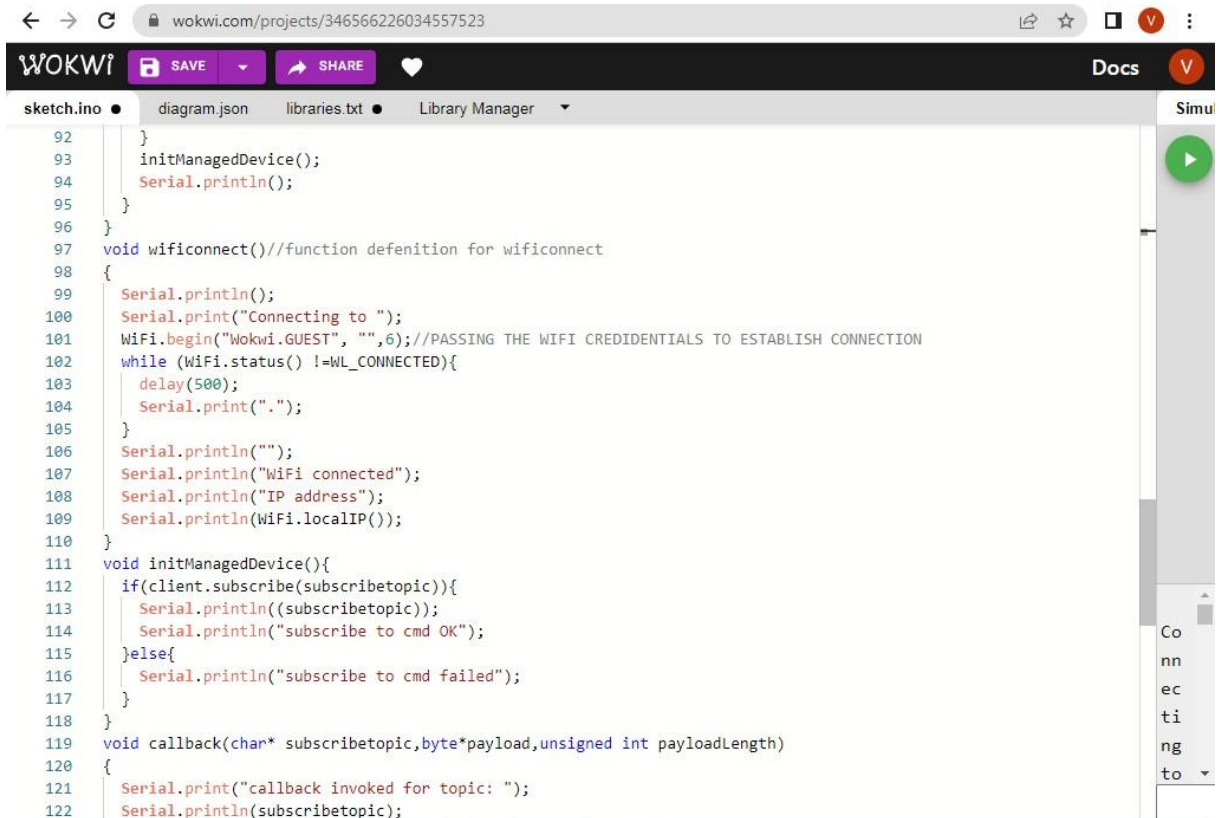

The screenshot shows the Wokwi IDE interface with the 'sketch.ino' file open. The code defines a 'wificonnect' function and an 'initManagedDevice' function. The 'wificonnect' function attempts to connect to a WiFi network named 'Wokwi.GUEST' with an empty password. It includes a 500ms delay and prints status messages. The 'initManagedDevice' function subscribes to a topic and prints a confirmation message. A 'callback' function is also defined to handle incoming data.

```
92 }
93   initManagedDevice();
94   Serial.println();
95 }
96 }
97 void wificonnect()//function defenition for wificonnect
98 {
99   Serial.println();
100   Serial.print("Connecting to ");
101   WiFi.begin("Wokwi.GUEST", "",6);//PASSING THE WIFI CREDENTIALS TO ESTABLISH CONNECTION
102   while (WiFi.status() !=WL_CONNECTED){
103     delay(500);
104     Serial.print(".");
105   }
106   Serial.println("");
107   Serial.println("WiFi connected");
108   Serial.println("IP address");
109   Serial.println(WiFi.localIP());
110 }
111 void initManagedDevice(){
112   if(client.subscribe(subscribetopic)){
113     Serial.println((subscribetopic));
114     Serial.println("subscribe to cmd OK");
115   }else{
116     Serial.println("subscribe to cmd failed");
117   }
118 }
119 void callback(char* subscribetopic,byte*payload,unsigned int payloadLength)
120 {
121   Serial.print("callback invoked for topic: ");
122   Serial.println(subscribetopic);
```



The screenshot shows the continuation of the Arduino sketch in the Wokwi IDE. This section contains a 'for' loop that iterates through the 'payload' array. It prints each character of the payload to the serial monitor and increments a 'data3' variable. Conditional logic is present to handle different data values, such as 'Near', and to control an LED (HIGH or LOW). The loop ends with a semicolon and a closing brace.

```
123   for(int i=0; i< payloadLength; i++){
124     //Serial.print((char)payload[i]);
125     data3 +=(char)payload[i];
126   }
127   //Serial.println("dta: "+ data3);
128   //if(data3=="Near")
129   //{
130   //Serial.println(data3);
131   //digitalWrite(LED,HIGH);
132   //}
133   //else
134   //{
135   //Serial.println(data3);
136   //digitalWrite(LED,LOW);
137   //}
138   data3="";
139 }
```

OUTPUT:

DATA IS SENT TO IBM CLOUD WHEN NO OBJECT IS DETECTED

