

1



"Ta" - Clearance Fit RC7 to T-Bar 1.4985 +/- 0.0005



"Tb" - Clearance Fit RC3 to T-Bar 0.99895 +/- 0.00025

"Tc" - Clearance Fit RC1 to T-Bar 1.4985 +/- 0.0005

Break all sharp exterior edges and corners 0.010 minimum.

Find and throttle T-Bar manufacturere for information on interior corner treatment.

Good Luck.

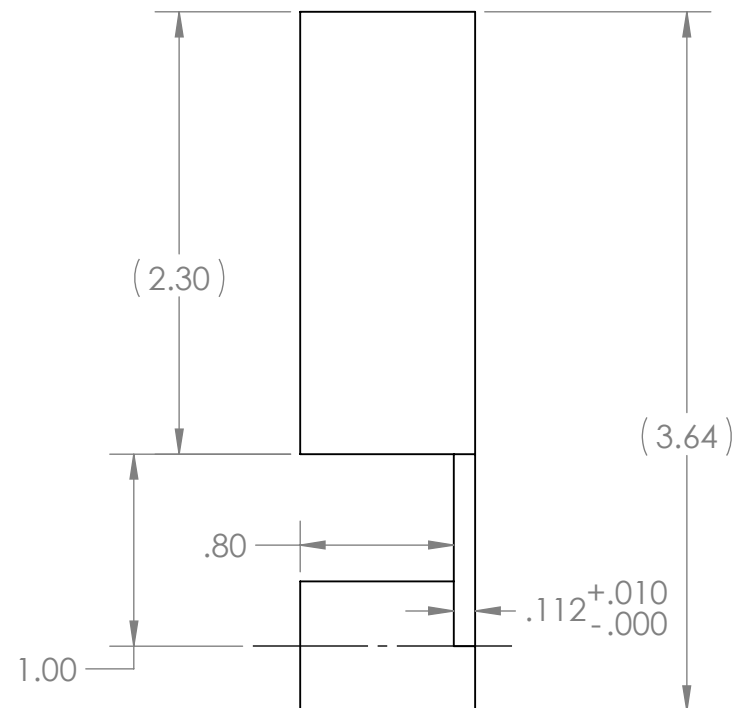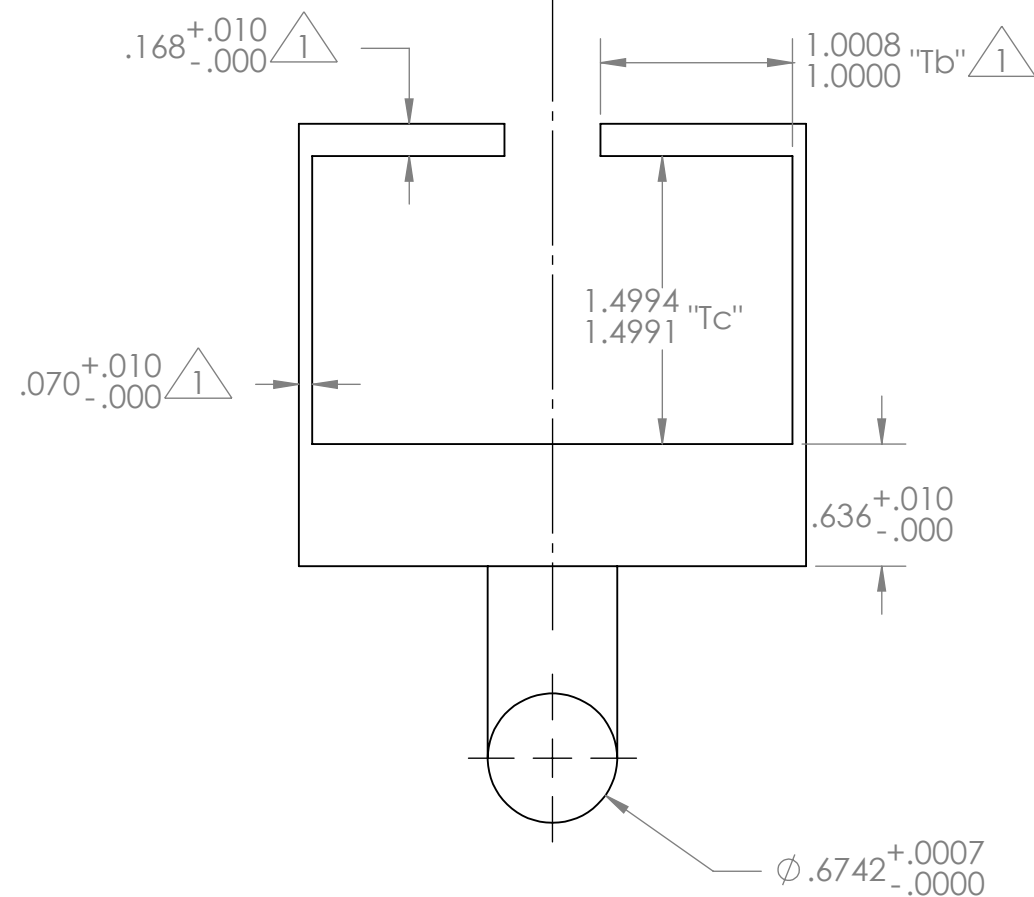

MATERIAL		6061-T6 (SS)	UNLESS OTHERWISE SPECIFIED:		NAME		DATE	
FINISH			DIMENSIONS ARE IN INCHES TOLERANCES: (x/x) ± 1/16th (x/x) ± 0.020 (x.xx) ± 0.010 (x.xxx) ± 0.005 ≤ MACH ± 1 ≤ BEND ± 3		DRAWN		Austin Hill 9/30/2026	
		CHECKED						
		ENG APPR.						
		MFG APPR.						
			INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5		Q.A.			
					COMMENTS:			
NEXT ASSY		USED ON			SIZE		DWG. NO.	
					B		A6 BRACKET	