ASSIGNMENT-4

DISTANCE DETECTION USING ULTRASONIC SENSOR

Date	22 October 2022
Team ID	PNT2022TMID18390
Name	MADHANKUMAR R
Student Roll Number	1919102077
Maximum Marks	2 Marks

Question1:

Write code and connections in work for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

WOKWI LINK:

https://wokwi.com/projects/305566932847821378

CODE :

```
#include <WiFi.h>//library for wifi
#include <PubSubClient.h>//library for MQtt


void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-------credentials of IBM Accounts------

#define ORG "4hn0jp"//IBM ORGANITION ID
#define DEVICE_TYPE "ULTRASON"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "DISTANCEDETECT"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "wuo5s7PR)ZSegVk&Rx"//Token
String data3;
float dist;


//-------- Customise the above values --------
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";// Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json";// topic name and type of event perform and format in which data to be send
char subscribetopic[] = "iot-2/cmd/test/fmt/String";// cmd  REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id


//-----------------------------------------
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by passing parameter like server id,portand wificredential

int LED = 4;
int trig = 5;
int echo = 18;
void setup()
{
Serial.begin(115200);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
pinMode(trig,OUTPUT);
pinMode(echo,INPUT);
pinMode(LED, OUTPUT);
delay(10);
wificonnect();
mqttconnect();
}
void loop()// Recursive Function
{

 digitalWrite(trig,LOW);
  digitalWrite(trig,HIGH);
  delayMicroseconds(10);
  digitalWrite(trig,LOW);
  float dur = pulseIn(echo,HIGH);
  float dist = (dur * 0.0343)/2;
  Serial.print ("Distancein cm");
  Serial.println(dist);


  PublishData(dist);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}



/*.....................................retrieving to Cloud.............................*/

void PublishData(float dist) {
  mqttconnect();//function call for connecting to ibm
  /*
     creating the String in in form JSon to update the data to ibm cloud
```

```
    creating the String in in form JSon to update the data to ibm cloud
    */
    String object;
    if (dist <100)
    {
      digitalWrite(LED,HIGH);
      Serial.println("object is near");
      object = "Near";
    }
    else
    {
      digitalWrite(LED,LOW);
      Serial.println("no object found");
      object = "No";
    }

    String payload = "{\"distance\":";
    payload += dist;
    payload += "," "\"object\":\"";
    payload += object;
    payload += "\"}";


    Serial.print("Sending payload: ");
    Serial.println(payload);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print publish ok in Serial monitor or else it will print publish failed
  } else {
    Serial.println("Publish failed");
  }

}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!!!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }

    initManagedDevice();
    Serial.println();
  }
}
void wificonnect() //function defination for wificonnect
{
  Serial.println();
  Serial.print("Connecting to ");

  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
  WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.println("");
  Serial.println("WiFi connected");
  Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }

//   Serial.println("data: "+ data3);
//   if(data3=="Near")
//   {
// Serial.println(data3);
```

esp32-blink.ino ● diagram.json ● libraries.txt ● Library Manager

```
142  }
143
144  void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
145  {
146
147    Serial.print("callback invoked for topic: ");
148    Serial.println(subscribetopic);
149    for (int i = 0; i < payloadLength; i++) {
150      //Serial.print((char)payload[i]);
151      data3 += (char)payload[i];
152    }
153
154  //   Serial.println("data: "+ data3);
155  //   if(data3=="Near")
156  //   {
157  // Serial.println(data3);
158  // digitalWrite(LED,HIGH);
159
160  //   }
161
162  //   else
163  //   {
164  // Serial.println(data3);
165  // digitalWrite(LED,LOW);
166
167  //   }
168  data3="";
169
170
171  }
```

OUTPUT:

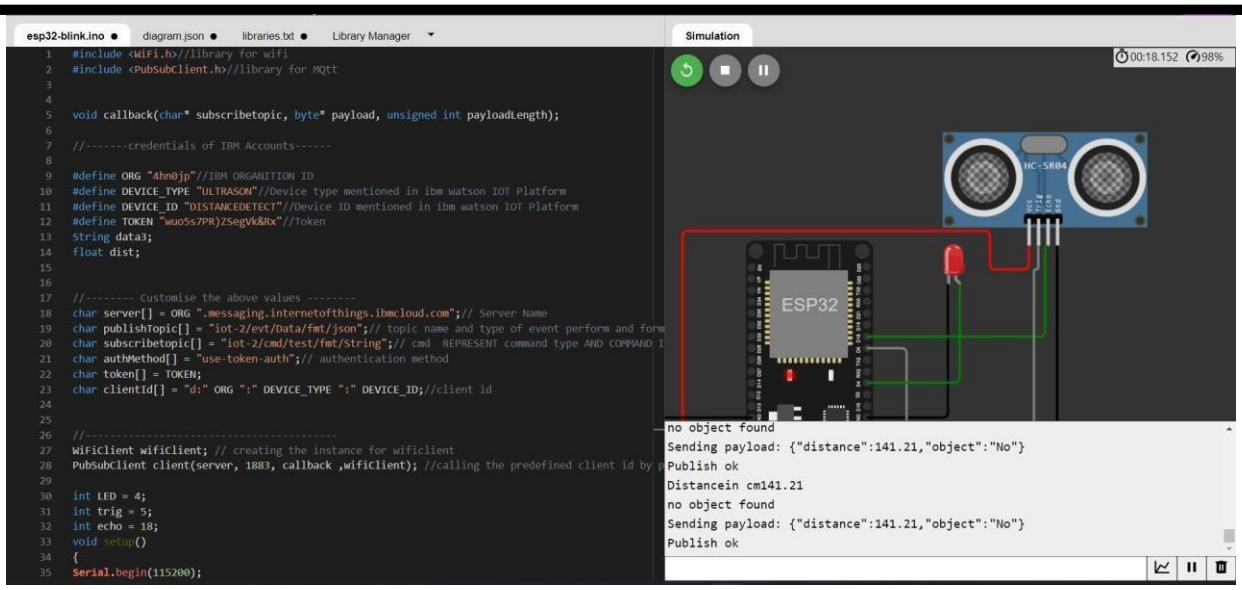

Data send to the IBM cloud device when the object is far

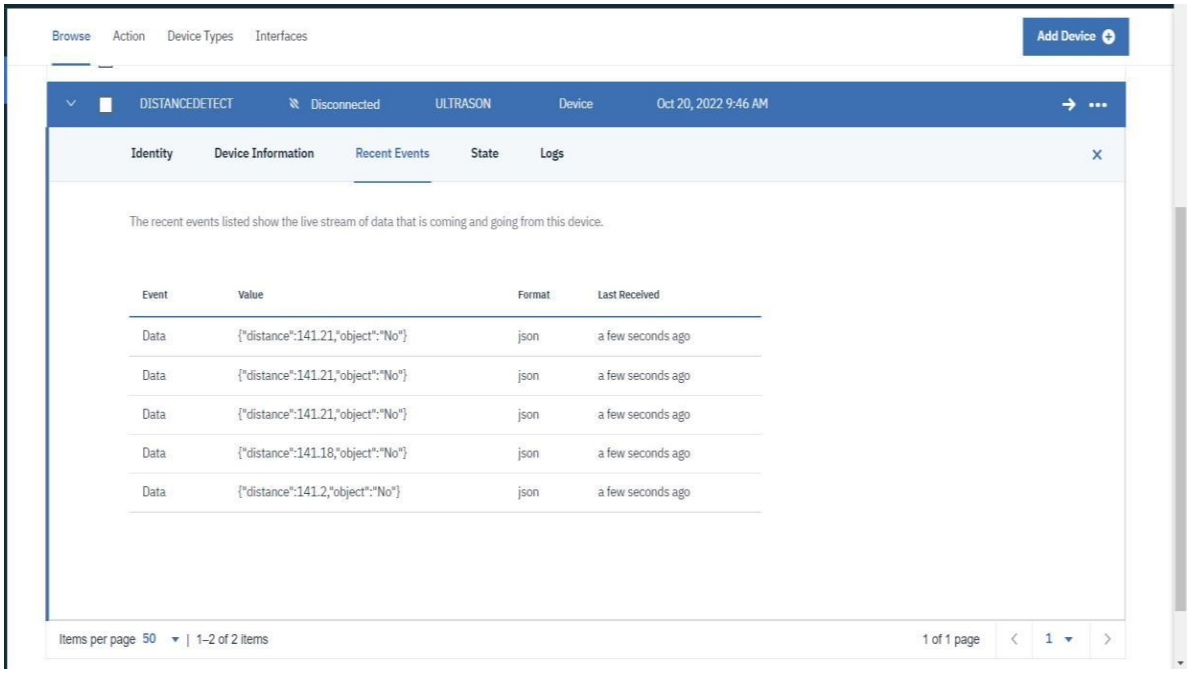

when object is near to the ultrasonic sensor

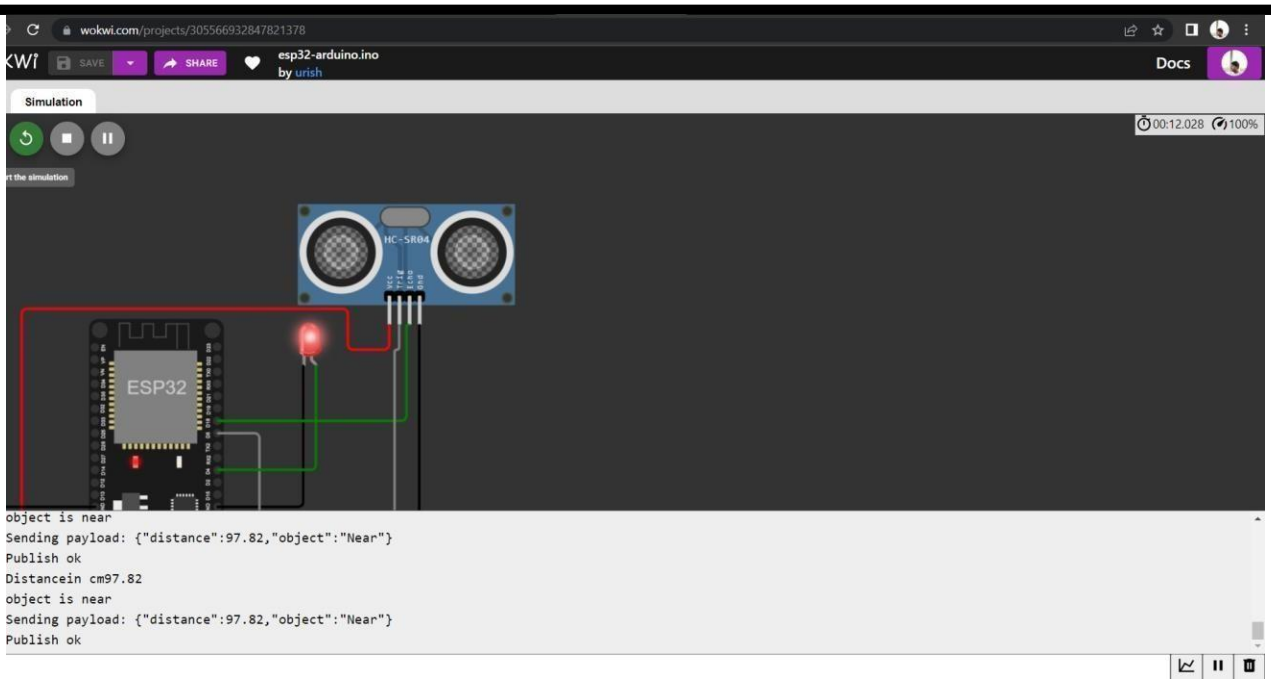

Data sent to the IBM Cloud Device when the object is near

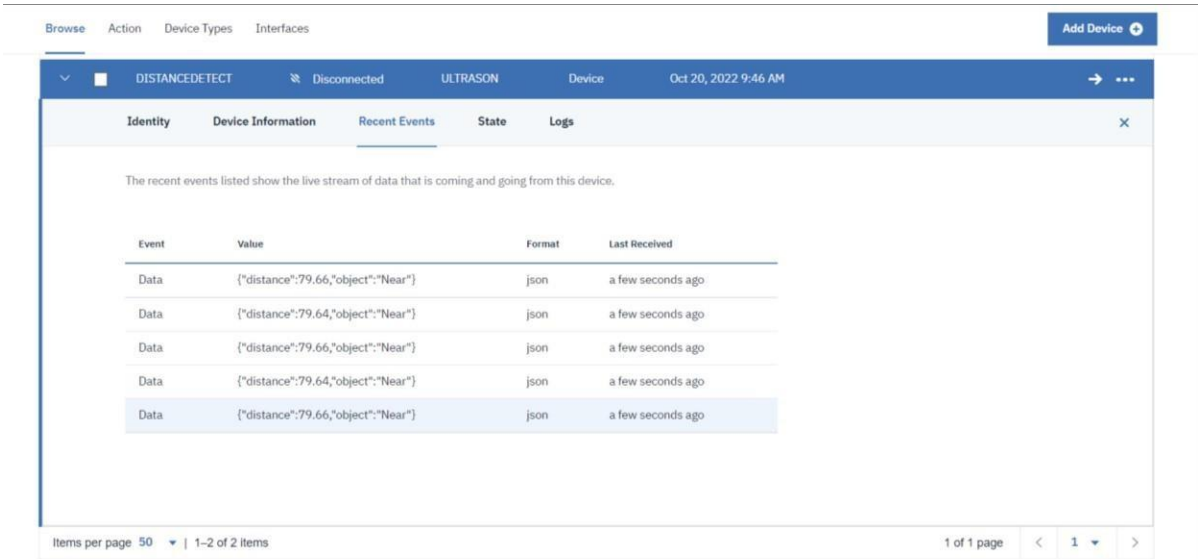

https://wokwi.com/projects/305566932847821378