# **Assignment-4**

Date	24 October 2022
Name	SOUNDARRAJS
Roll Number	620119106092
Team ID	PNT2022TMID30936
Project Name	IoT Based Safety Gadget for Child Safety Monitoring and Notification.

### Question:

Write code and connections in wokwi for ultrasonic sensors. That whenever distance is less than 100 cms send "alert" to ibm cloud and display in device recent events.

Upload document with wokwi share link and images.

### Wokwi:

## https://wokwi.com/projects/348203162225607250


#### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
#define ORG "ironpk"
#define DEVICE_TYPE "soundarraj"
#define DEVICE ID "sivakumar"
#define TOKEN "hPvfbhoUGX&1Z0 cjb"
#define speed 0.034
char server[] = ORG".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/status1/fmt/json"; char
topic[] = "iot-2/cmd/home/fmt/String"; char authMethod[] =
"use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient); void
publishData(); const int trigpin=5; const int echopin=18;
String command;
String data=""; long
duration; float
dist;
 void
setup()
{
       Serial.begin(115200);
       pinMode(trigpin, OUTPUT);
```


```
pinMode(echopin, INPUT);
      wifiConnect(); mqttConnect();
} void loop() {
publishData(); delay(500);
if (!client.loop()) {
mqttConnect();
      }
}
void wifiConnect() {
      Serial.print("Connecting to "); Serial.print("Wifi");
      WiFi.begin("Wokwi-GUEST", "", 6); while
       (WiFi.status() != WL_CONNECTED) { delay(500);
             Serial.print(".");
      }
      Serial.print("WiFi connected, IP address: ");
      Serial.println(WiFi.localIP());
} void mqttConnect() { if
(!client.connected()) {
             Serial.print("Reconnecting MQTT client to ");
             Serial.println(server);
             while (!client.connect(clientId, authMethod, token))
                    { Serial.print("."); delay(500);
      }
      initManagedDevice();
      Serial.println();
      } }
void initManagedDevice() { if
      (client.subscribe(topic)) {
      Serial.println("subscribe to cmd OK");
      } else
      {
             Serial.println("subscribe to cmd FAILED");
} }
void publishData()
{ digitalWrite(trigpin,LOW);
      digitalWrite(trigpin,HIGH);
      delayMicroseconds(10);
      digitalWrite(trigpin,LOW);
      duration=pulseIn(echopin,HIGH);
      dist=duration*speed/2;
      if(dist<100){
             String payload = "{\"Alert distance\":";
             payload += dist; payload += "}";
             Serial.print("\n");
             Serial.print("Sending payload: ");
             Serial.println(payload);
             if (client.publish(publishTopic, (char*) payload.c_str())){
                    Serial.println("Publish OK");
             } else
                    Serial.println("Publish FAILED");
```


```
}
}
```

Diagram:

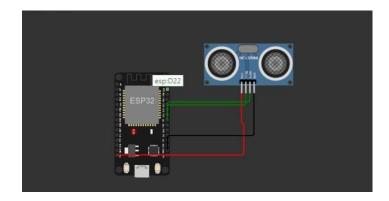

## **Wokwi Output:**

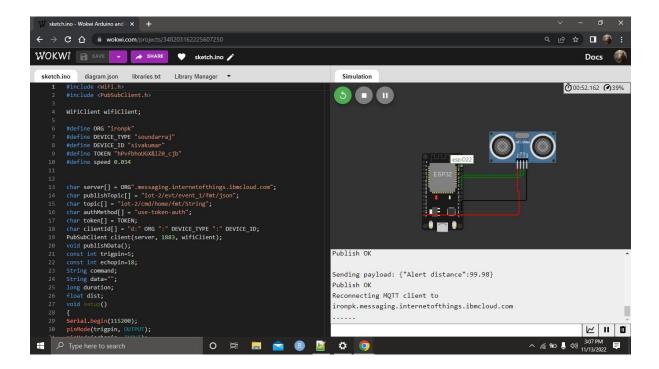

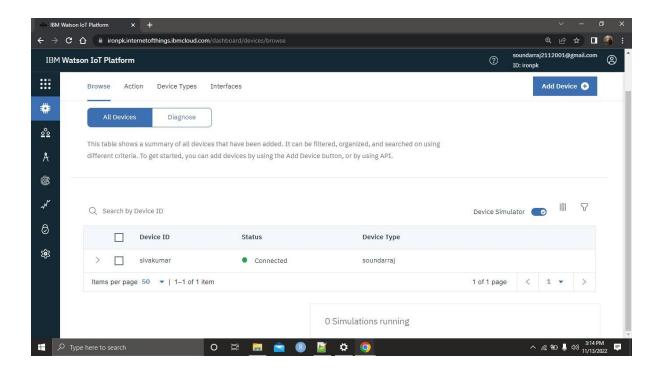

## **IBM cloud output:**

