

Assignment - 4

By : - Dhachayani K

720819106024

Question-1:

Write code and connections in wokwi for ultrasonic sensor. Whenever distance is less than 100 cms send "alert" to IBM cloud and display in device recent events.

WOKWI LINK: <https://wokwi.com/projects/346502216516895315>

CODE:

```
#include <WiFi.h> //library for wifi #include
<PubSubClient.h> //library for MQTT

void callback(char* subscribtopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "f59trs" //IBM ORGANITION ID
#define DEVICE_TYPE "ultrasonicsensor" //Device type mentioned in ibm watson
IOT Platform
#define DEVICE_ID "distancedetection" //Device ID mentioned in ibmwatson
IOT Platform
#define TOKEN "AIGMGaaF01nawa1QA3" //Token
String data3;
float dist;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; //Server Name char
publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform
and format in which data to be send
char subscribtopic[] = "iot-2/cmd/test/fmt/String"; //
cmd REPRESENT command type AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth"; // authentication method char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID; //clientid

// -
WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback, wifiClient);
//calling the predefined client id by passing parameter like server id, port and
wificredential

int LED = 4; int
trig = 5; int echo =
18; void setup()
{
Serial.begin(115200);
```

```

pinMode(trig,OUTPUT);
pinMode(echo,INPUT);
pinMode(LED, OUTPUT);
delay(10); wificonnect();
mqttconnect();
}
void loop()// Recursive Function
{

digitalWrite(trig,LOW);
digitalWrite(trig,HIGH);
delayMicroseconds(10);
digitalWrite(trig,LOW);
float dur = pulseIn(echo,HIGH);float dist
= (dur * 0.0343)/2; Serial.print
("Distancein cm");Serial.println(dist);


PublishData(dist);
delay(1000);
if (!client.loop()) {
    mqttconnect();
}
}

/* .....retrieving to
Cloud. ....*/

void PublishData(float dist) { mqttconnect();//function call for
connecting to ibm
/*
    creating the String in in form JSon to update the data toibm
cloud */
String object;
if (dist <100)
{
    digitalWrite(LED,HIGH);
    Serial.println("object is near");object =
    "Near";
}
else
{
    digitalWrite(LED,LOW); Serial.println("no
object found");object = "No";
}

String payload = "{\"distance\":";payload +=
dist;
payload += ", \"object\":";payload +=
object;
payload += "\"}";

```

```
Serial.print("Sending payload: ");  
Serial.println(payload);
```

```
if (client.publish(publishTopic, (char*) payload.c_str())) {  
    Serial.println("Publish ok");// if it successfully upload data on the cloud then it will  
    print publish ok in Serial monitor or else it will print publish failed } else {  
        Serial.println("Publish failed");  
    }  
}
```

```
}  
void mqttconnect() {  
    if (!client.connected()) { Serial.print("Reconnecting  
client to ");Serial.println(server);  
        while (!client.connect(clientId, authMethod, token)) {  
            Serial.print(".");  
            delay(500);  
        }  
    }  
}
```

```
initManagedDevice();  
Serial.println();  
}
```

```
void wificonnect() //function definition for wificonnect  
{  
    Serial.println(); Serial.print("Connecting  
to ");
```

```
    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the  
connection
```

```
    while (WiFi.status() != WL_CONNECTED) {  
        delay(500);  
        Serial.print(".");  
    }
```

```
    Serial.println(""); Serial.println("WiFi  
connected");Serial.println("IP address: ");  
    Serial.println(WiFi.localIP());  
}
```

```
void initManagedDevice() {  
    if (client.subscribe(subscribetopic)) {  
        Serial.println((subscribetopic)); Serial.println("subscribe to cmd  
OK");  
    } else {  
        Serial.println("subscribe to cmd FAILED");  
    }  
}
```

```
void callback(char* subscribetopic, byte* payload, unsigned  
int payloadLength) {
```

```
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);data3 +=
    (char)payload[i];
}

// Serial.println("data: " + data3);
// if(data3=="Near")
// {
// Serial.println(data3);
// digitalWrite(LED,HIGH);


// }

// else
// {
// Serial.println(data3);
// digitalWrite(LED,LOW);


// }
data3="";
}
```

OUTPUT:

When object is not near to the ultrasonic sensor

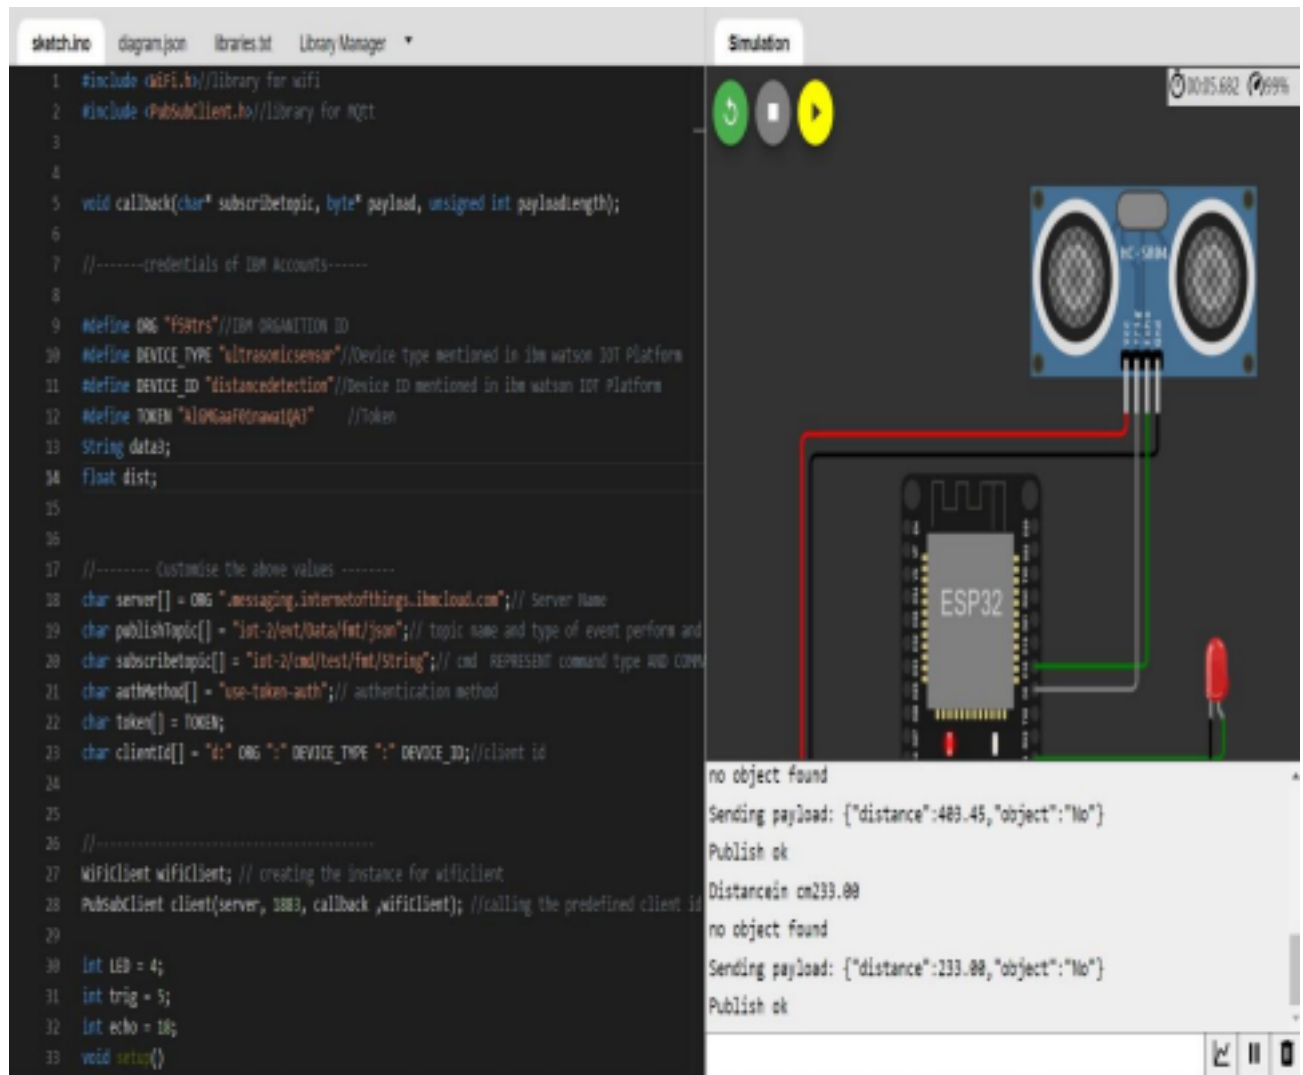

Data sent to the IBM cloud device when the object is far

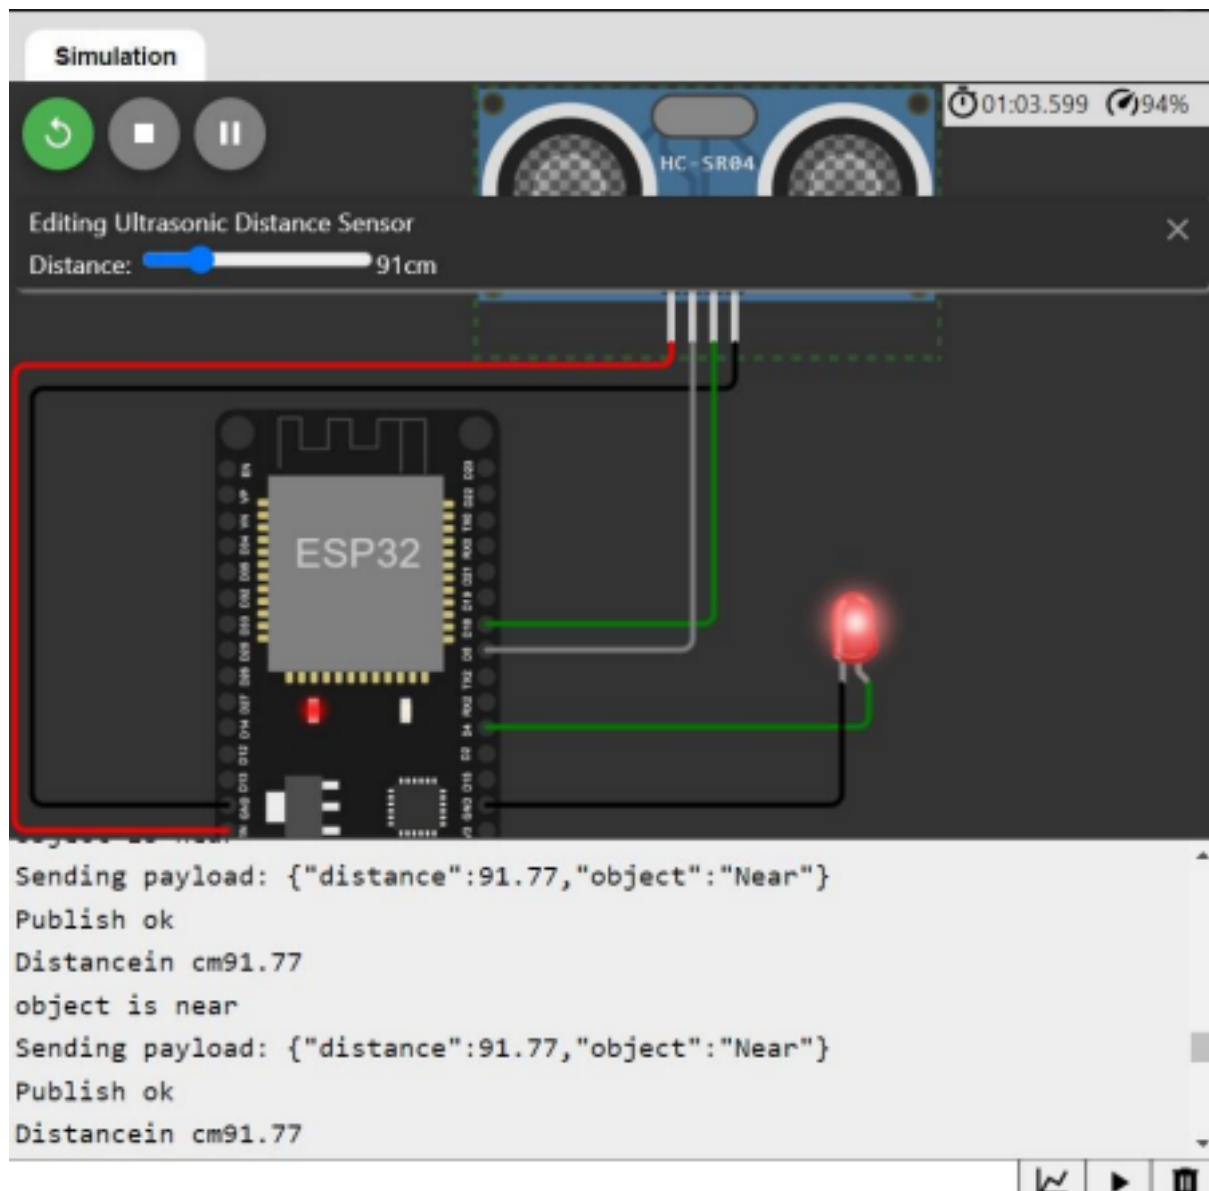

Data sent to the IBM cloud device when the object is near

