

ASSIGNMENT-4

REG.NO	731219106014
TEAM ID	PNT2022TMID44431

QUESTION:

Write code and connection in Wokwi for the ultrasonic sensor. When ever the distance is less than 100cms send an “Alert to IBM cloud and display in the device recent events.

CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT
Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT
Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth"; char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
```

```

Serial.begin(115200);
pinMode(trigPin, OUTPUT);
pinMode(echoPin, INPUT);
wificonnect();
mqttconnect();
}
void loop()
{
digitalWrite(trigPin, LOW);
delayMicroseconds(2);
digitalWrite(trigPin, HIGH);
delayMicroseconds(10);
digitalWrite(trigPin, LOW);
duration = pulseIn(echoPin, HIGH);
distance = duration * SOUND_SPEED/2;
Serial.print("Distance (cm): ");
Serial.println(distance);
if(distance<100)
{
Serial.println("ALERT!!");
delay(1000);PublishData(distance);
delay(1000);
if (!client.loop()) {
mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
mqttconnect();
String payload = "{\"Distance\":\"";
payload += dist;
payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
payload += "\"}";
Serial.print("Sending payload: ");
Serial.println(payload);
if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish ok");
} else {
Serial.println("Publish failed");
}
}
void mqttconnect() {

```

```

if (!client.connected()) {
  Serial.print("Reconnecting client to ");
  Serial.println(server);
  while (!client.connect(clientId, authMethod, token)) {
    Serial.print(".");
    delay(500);
  } initManagedDevice();
  Serial.println();
}
}
void wificonnect()
{
  Serial.println(); Serial.print("Connecting to ");
  WiFi.begin("Wokwi-GUEST", "", 6); while (WiFi.status() !=
  WL_CONNECTED) { delay(500);
  Serial.print(".");
}
  Serial.println(""); Serial.println("WiFi
  connected"); Serial.println("IP address: ");
  Serial.println(WiFi.localIP());
}
void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic)); Serial.println("subscribe to
    cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) { //Serial.print((char)payload[i]);
  data3 += (char)payload[i];
  }
  Serial.println("data: "+ data3);
  data3="";
}

```

Diagram.json:

```

{

```

```


"version": 1,
"author": "sweetysharon",
"editor": "wokwi",
"parts": [
  { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": -4.67, "left": -114.67,
    "attrs": {} },
  { "type": "wokwi-hc-sr04", "id": "ultrasonic1", "top": 15.96, "left": 89.17,
    "attrs": {} }
],
"connections": [
  [ "esp:TX0", "$serialMonitor:RX", "", [] ],
  [ "esp:RX0", "$serialMonitor:TX", "", [] ],
  [
    "esp:VIN",
    "ultrasonic1:VCC",
    "red",
    [ "h-37.16", "v-178.79", "h200", "v173.33", "h100.67" ]
  ],
  [ "esp:GND.1", "ultrasonic1:GND", "black", [ "h39.87", "v44.04", "h170" ] ],
  [ "esp:D5", "ultrasonic1:TRIG", "green", [ "h54.54", "v85.07", "h130.67" ] ],
  [ "esp:D18", "ultrasonic1:ECHO", "green", [ "h77.87", "v80.01", "h110" ] ]
]

```

Wokwisimulation link:

<https://wokwi.com/projects/347024213564981843>

Circuit Diagram:

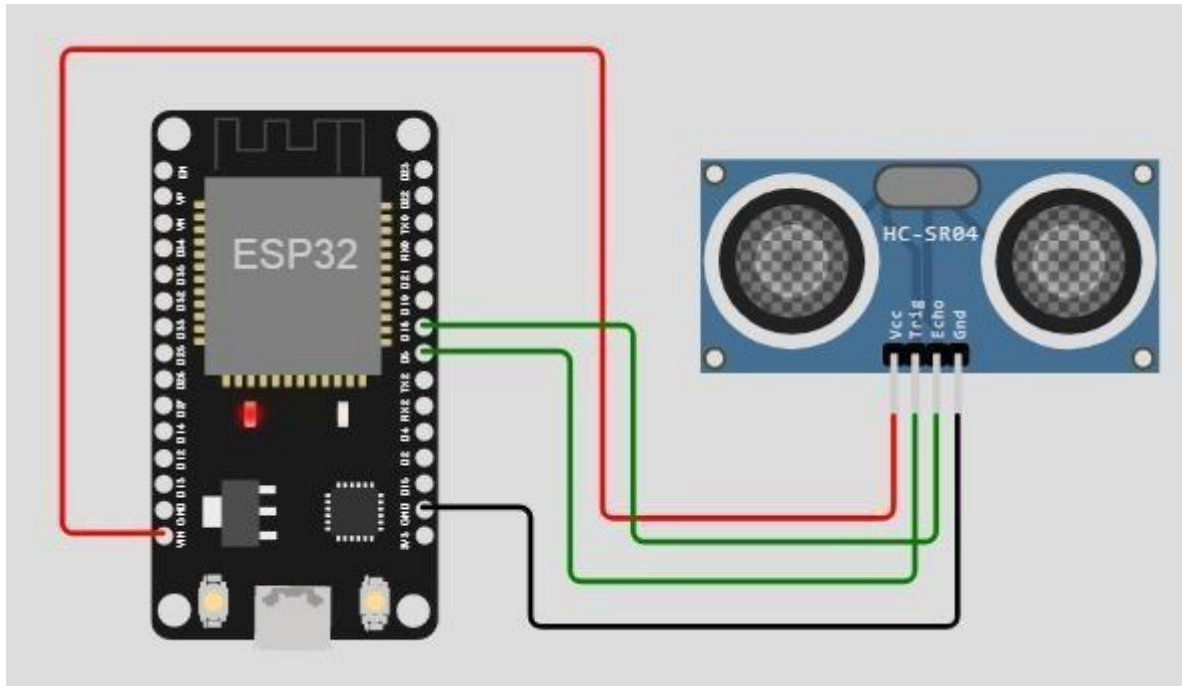

Output:

Wokwi output:

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

IBM cloud output:



Identity Device Information Recent Events State Logs



The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago