

Assignment -4

Assignment Date	14 November 2022
Student Name	R.ABARNA
Student Roll Number	812419106001
Maximum Marks	2 Marks

Question-1:

Write code and connections in wokwi for the ultrasonic sensor.

Whenever the distance is less than 100 cms send an "alert" to the IBM cloud and display in the device recent events.

Upload document with wokwi share link and images of IBM cloud

Wowki link: <https://wokwi.com/projects/347280270780531283>

Program:

```
#include <WiFi.h>
```

```
#include <PubSubClient.h>
```

```
#include <ArduinoJson.h>
```

WiFiClient wificlient;

```
#define ORG "tubusr"
```

```
#define DEVICE_TYPE "Evangs151"
```

```
#define DEVICE_ID "trainingid"
```

```
#define TOKEN "vqHfrv0*Jf3RB5hcJ8"
```

```
#define speed 0.034
```

```
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
```

```
char publishTopic[] = "iot-2/evt/Data/fmt/json"; char topic[] =
```

```
"iot-2/cmd/home/fmt/String"; char authMethod[] = "use-token
```

```
auth"; char token[] = TOKEN; char clientId[] = "d:" ORG ":"
```

```
DEVICE_TYPE ":" DEVICE_ID; PubSubClient client(server,
```

1883, wifiClient); void publishData();

const int trigpin=5; const

int echopin=18; String

command;

String data="";

long duration; int

dist;

void setup()

{

Serial.begin(115200);

pinMode(trigpin, OUTPUT);

pinMode(echopin, INPUT);

wifiConnect(); mqttConnect();

}

void loop() {

publishData();

delay(500); if

(!client.loop()) {

mqttConnect();

}

}

void wifiConnect() {

Serial.print("Connecting to "); Serial.print("Wifi");

WiFi.begin("Wokwi-GUEST", "", 6);

while (WiFi.status() != WL_CONNECTED) {

```

delay(500);

Serial.print('.');
}

Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() { if
(!client.connected()) {

Serial.print("Reconnecting MQTT client to "); Serial.println(server);
while (!client.connect(clientId, authMethod, token)) {
Serial.print('.'); delay(1000);
}
initManagedDevice();
Serial.println();
}
}

void initManagedDevice() {
if (client.subscribe(topic)) {

Serial.println(client.subscribe(topic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}

void publishData()
{
digitalWrite(trigpin,LOW);
digitalWrite(trigpin,HIGH); delayMicroseconds(10);

digitalWrite(trigpin,LOW);
duration=pulseIn(echopin,HIGH);
dist=duration*speed/2; if(dist<100){

```


```

DynamicJsonDocument doc(1024);
String payload;
doc["AlertDistance:"]=dist;
serializeJson(doc, payload); delay(3000);

Serial.print("\n");
Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
Serial.println("Publish OK");
} else {
Serial.println("Publish FAILED");
}
}
}
}

```

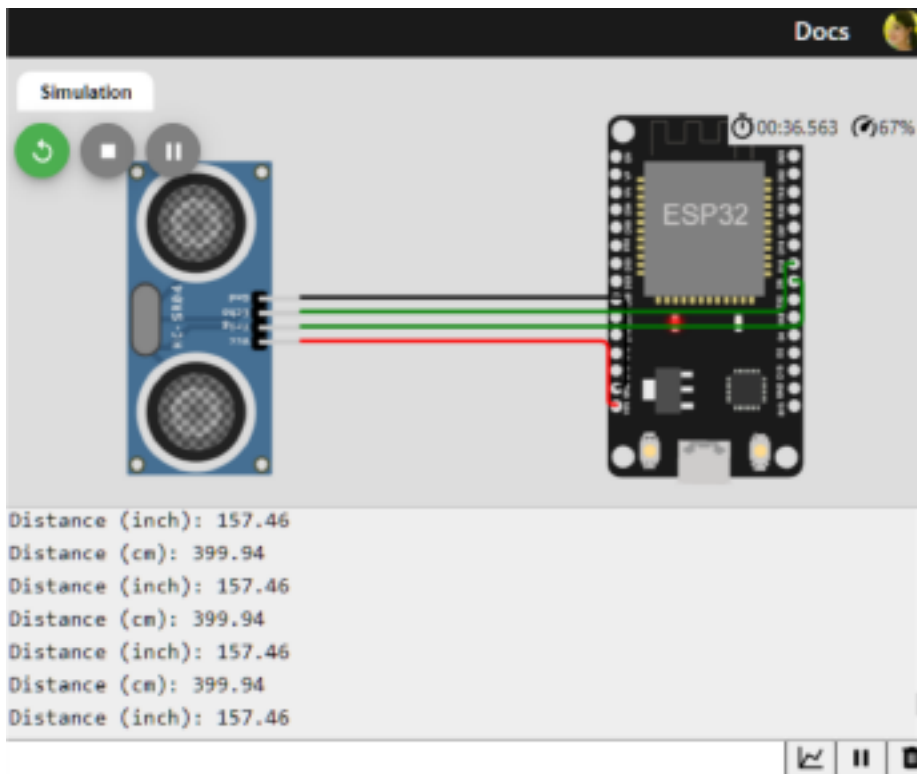

The screenshot shows the AWS IoT console interface. The top navigation bar includes 'Identity', 'Device Information', 'Recent Events' (selected), 'State', and 'Logs'. Below the navigation bar, a message states: 'The recent events listed show the live stream of data that is coming and going from this device.' Below this message is a table with the following data:

Event	Value	Format	Last Received
event_1	[\"AlertDistance\":51]	json	a few seconds ago
event_1	[\"AlertDistance\":56]	json	a few seconds ago
event_1	[\"AlertDistance\":27]	json	a few seconds ago
event_1	[\"AlertDistance\":53]	json	a few seconds ago
event_1	[\"AlertDistance\":50]	json	a few seconds ago

At the bottom of the console, a status bar indicates '1 Simulation running'.