B1	75S41-095-550	2	4702	B2	75S41-095-550	2	398	T3	75S41-095-550	2	776	T4	75S41-095-550	2	4361
W5	75S41-095-550	2	464	W6	75S41-095-550	2	528	W7	75S41-095-550	2	381	W8	75S41-095-550	2	564
W9	75S41-095-550	2	555	W10	75S41-095-550	2	585	W11	75S41-095-550	2	713	W12	75S41-095-550	2	610
W13	75S41-095-550	2	728	W14	75S41-095-550	2	635	W15	75S41-095-550	2	743	W16	75S41-095-550	2	660
W17	75S41-095-550	2	792	W18	75S41-095-550	2	687	W19	75S41-095-550	2	831	W20	75S41-095-550	2	716
W21	75S41-095-550	2	822	W22	75S41-095-550	2	741	W23	75S41-095-550	2	426	W24	75S41-095-550	2	760
W25	75S41-095-550	2	908	W26	75S41-095-550	2	790	FRAMECAD 1.15mm Apex/Heel Plate		4		FRAMECAD 10g-16mm Flathead		96	
FRAMECAD M6 Screw		192		Working Sheet: 75_Girder Trusses				Assembly Weight		32.1kg					


Powered by FRAMECAD Structure È

Minimum number of fasteners required is 2 per joint

GIRDER TRUSS


WELD ALL

DOUBLE GIRDER

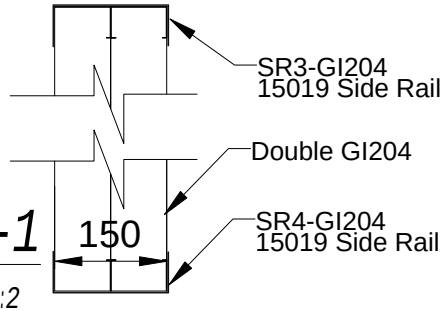

Sec 1-1

SCALE 1:2

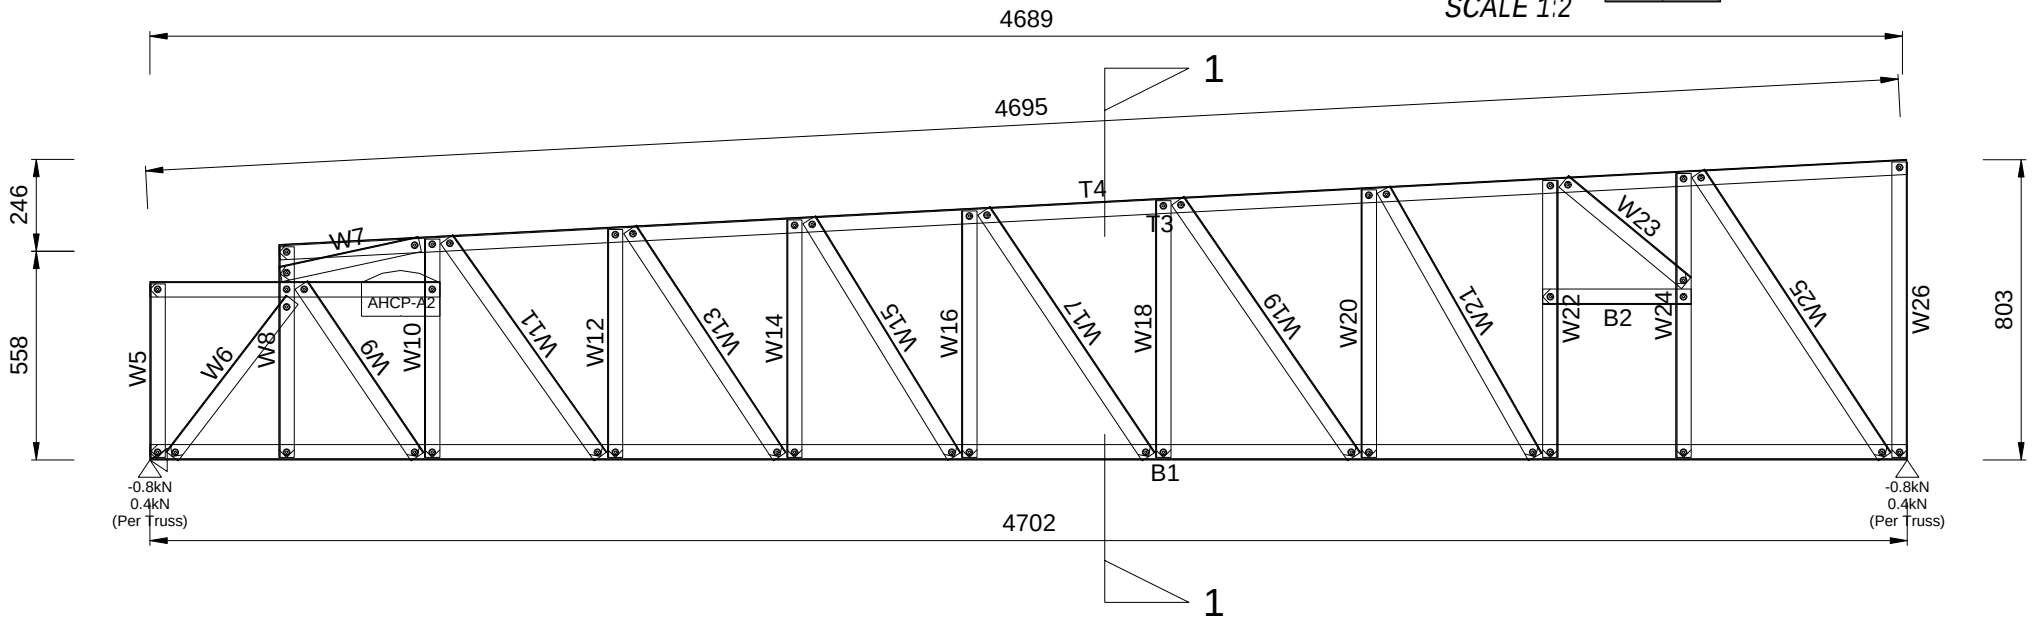

Quantity Required = 2 Mark as GI204 Double Girder Engineering Status = Unknown

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	3	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Number of on-coming Trusses:	0	Envelope:	807h x 4702w		