
B1	75S41-095-550	2	4800	T2	75S41-095-550	4	2652	R3	75S41-095-550	2	405	W4	75S41-095-550	4	122	W5	75S41-095-550	4	241
W6	75S41-095-550	4	248	W7	75S41-095-550	4	557	W8	75S41-095-550	4	874	W9	75S41-095-550	4	891	W10	75S41-095-550	4	1303
FRAMECAD M6 Screw		132		Working Sheet: 220_75 TRUSSES				Assembly Weight			24.5kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

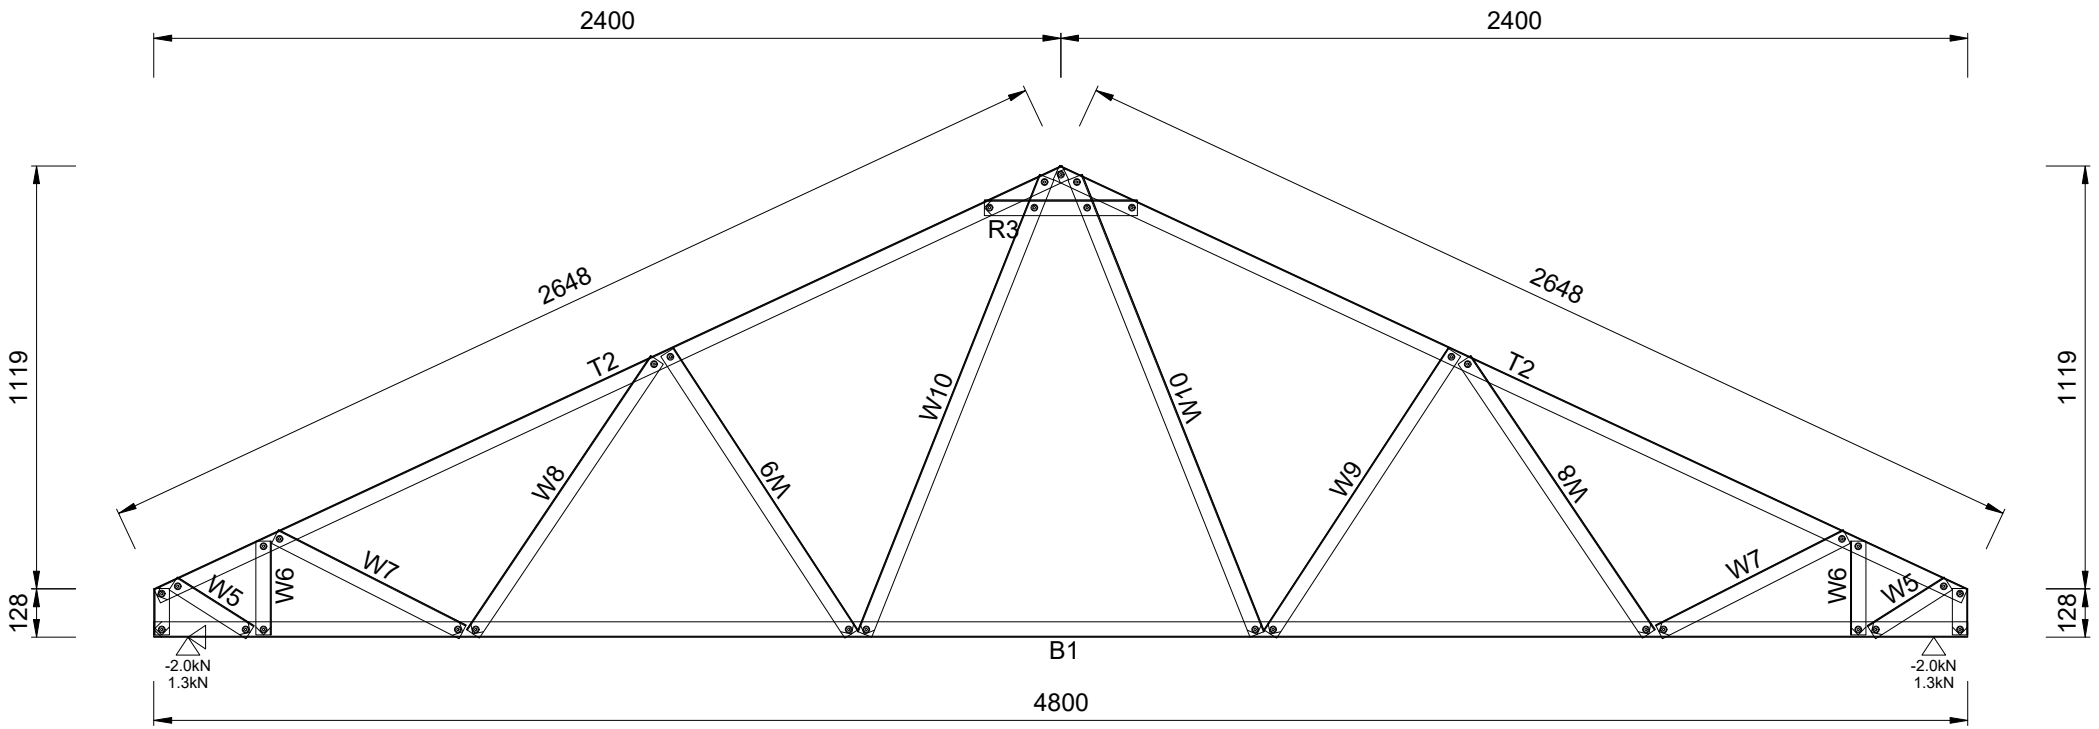


Quantity Required = 2 Mark as N100 Engineering Status = 50%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	850	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1253h x 4800w				

B1	75S41-095-550	3	4800	T2	75S41-095-550	6	2652	R3	75S41-095-550	3	405	W4	75S41-095-550	6	122	W5	75S41-095-550	6	241
W6	75S41-095-550	6	248	W7	75S41-095-550	6	557	W8	75S41-095-550	6	874	W9	75S41-095-550	6	891	W10	75S41-095-550	6	1303
FRAMECAD M6 Screw		198		Working Sheet: 220_75 TRUSSES				Assembly Weight			24.5kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

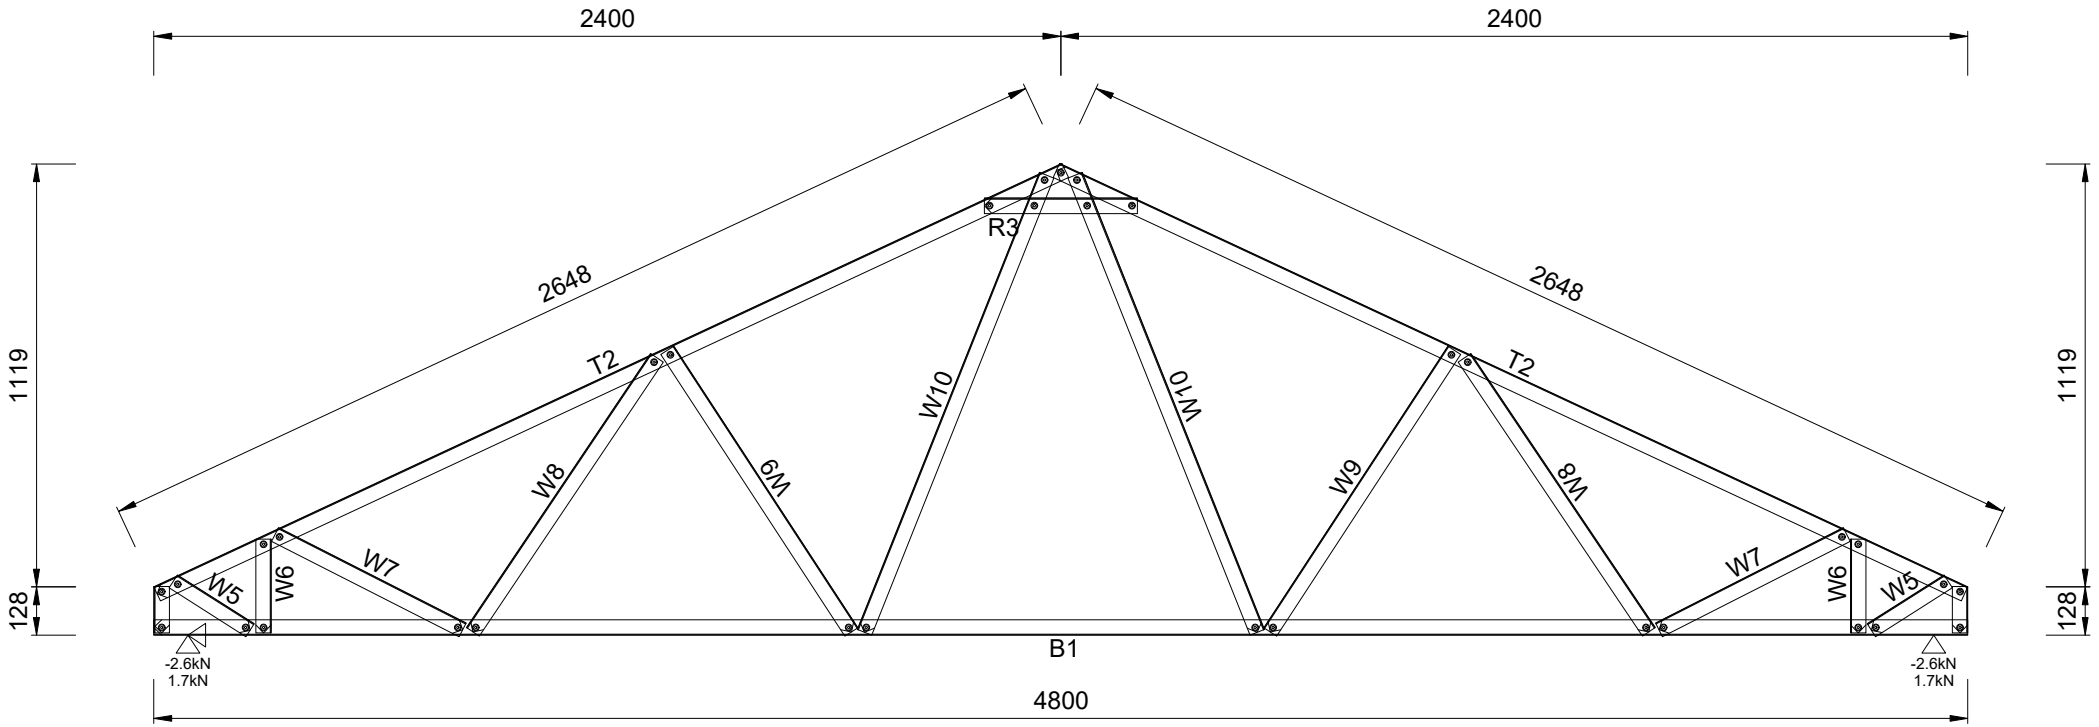


Quantity Required = 3 Mark as N101 Engineering Status = 52%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	1081	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1253h x 4800w				

B1	75S41-095-550	1	4800	T2	75S41-095-550	2	1395	H3	75S41-095-550	1	2449	W4	75S41-095-550	2	122	W5	75S41-095-550	2	245
W6	75S41-095-550	2	250	W7	75S41-095-550	2	815	W8	75S41-095-550	2	642	W9	75S41-095-550	3	1013	W10	75S41-095-550	2	667
FRAMECAD M6 Screw		64		Working Sheet: 220_75 TRUSSES				Assembly Weight			23.9kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

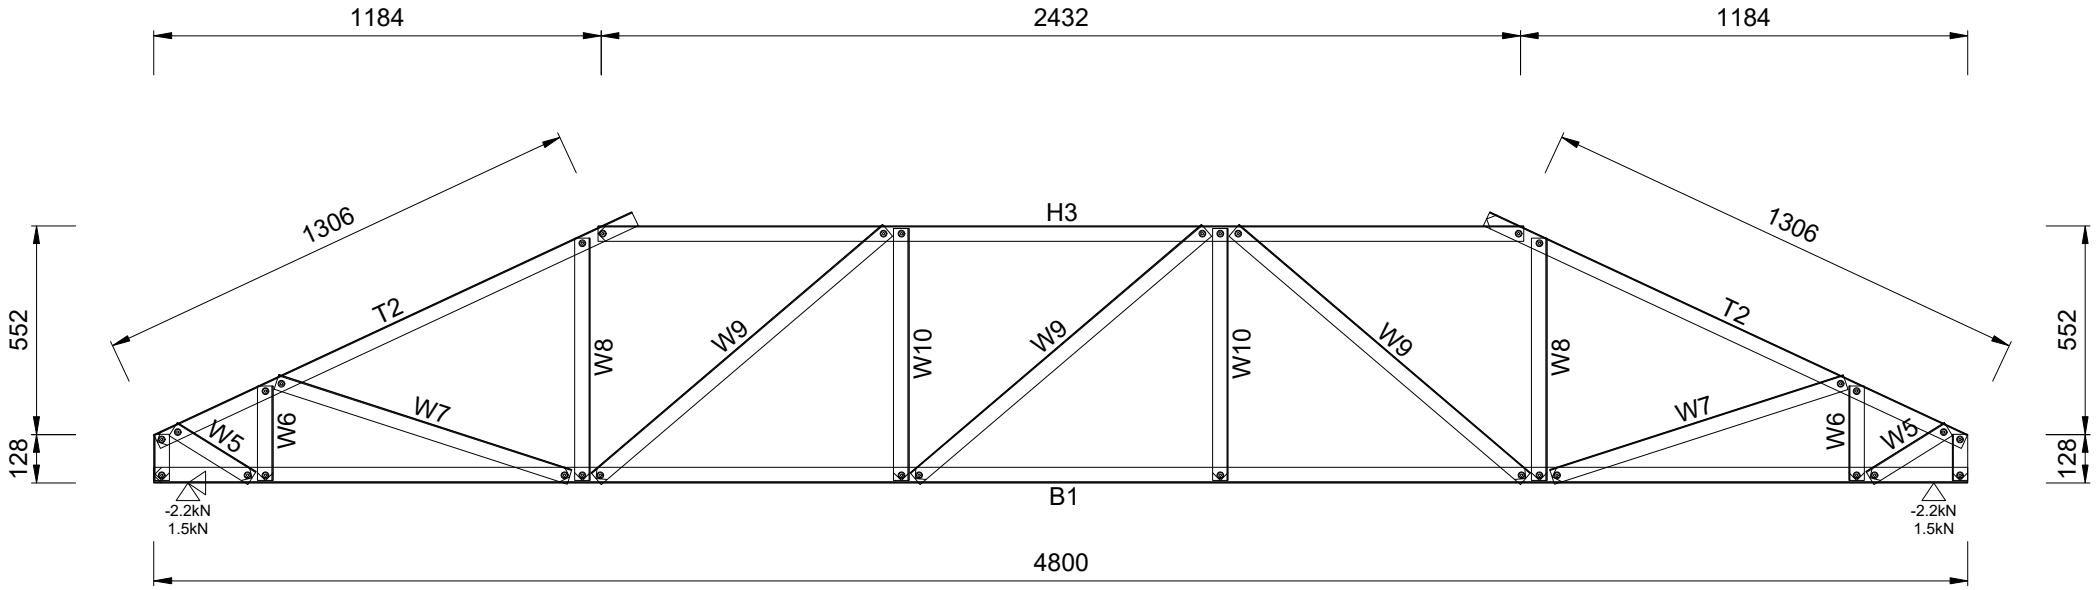


Quantity Required = 1 Mark as T100 Engineering Status = 46%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	909	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 4800w				

B1	75S41-095-550	1	4800	T2	75S41-095-550	2	1395	H3	75S41-095-550	1	2449	W4	75S41-095-550	2	122	W5	75S41-095-550	2	245
W6	75S41-095-550	2	250	W7	75S41-095-550	2	815	W8	75S41-095-550	2	642	W9	75S41-095-550	3	1013	W10	75S41-095-550	2	667
FRAMECAD M6 Screw		64		Working Sheet: 220_75 TRUSSES				Assembly Weight			23.9kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

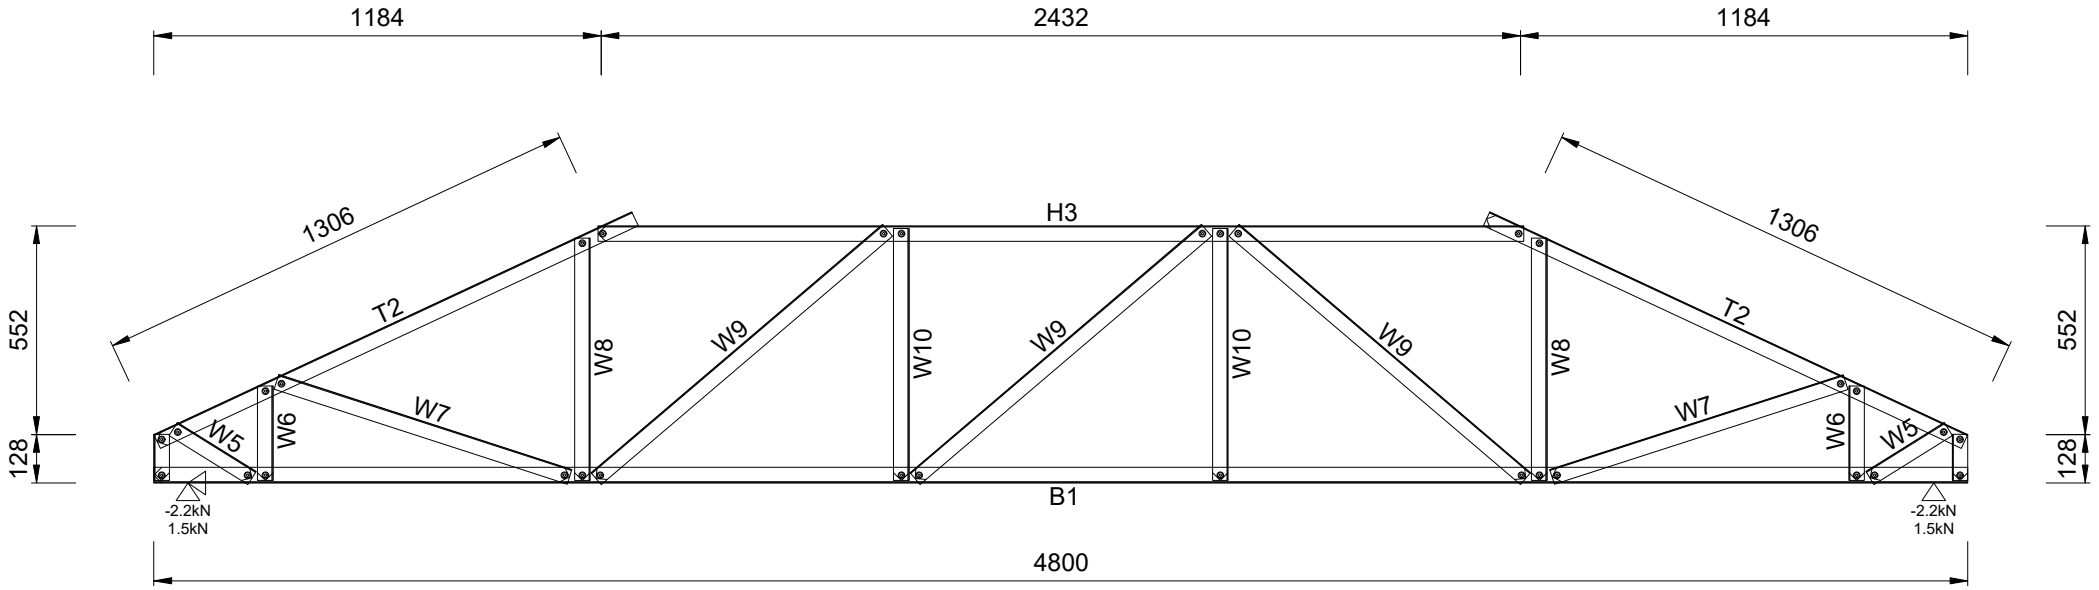


Quantity Required = 1 Mark as T101 Engineering Status = 46%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	909	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 4800w				

B1	75S41-095-550	2	1527	T2	75S41-095-550	2	1594	W3	75S41-095-550	2	191	W4	75S41-095-550	2	703	W5	75S41-095-550	2	436
W6	75S41-095-550	2	804	W7	75S41-095-550	2	680	FRAMECAD M6 Screw		40		Working Sheet: 220_75 TRUSSES				Assembly Weight			7.7kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

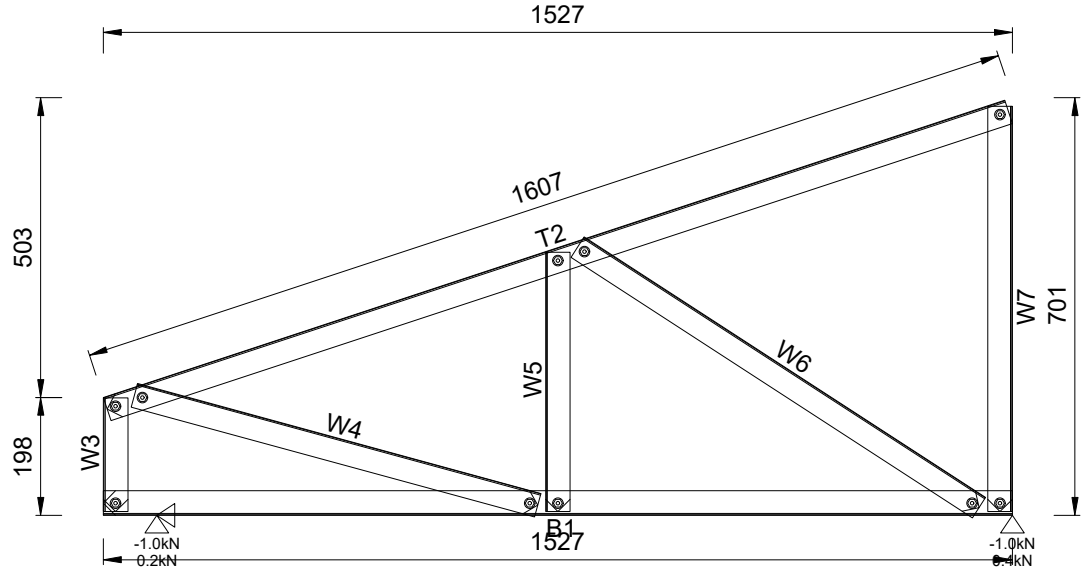


Quantity Required = 2 Mark as HN100 Engineering Status = 39%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	18.249	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	701h x 1527w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	1230	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			6.3kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

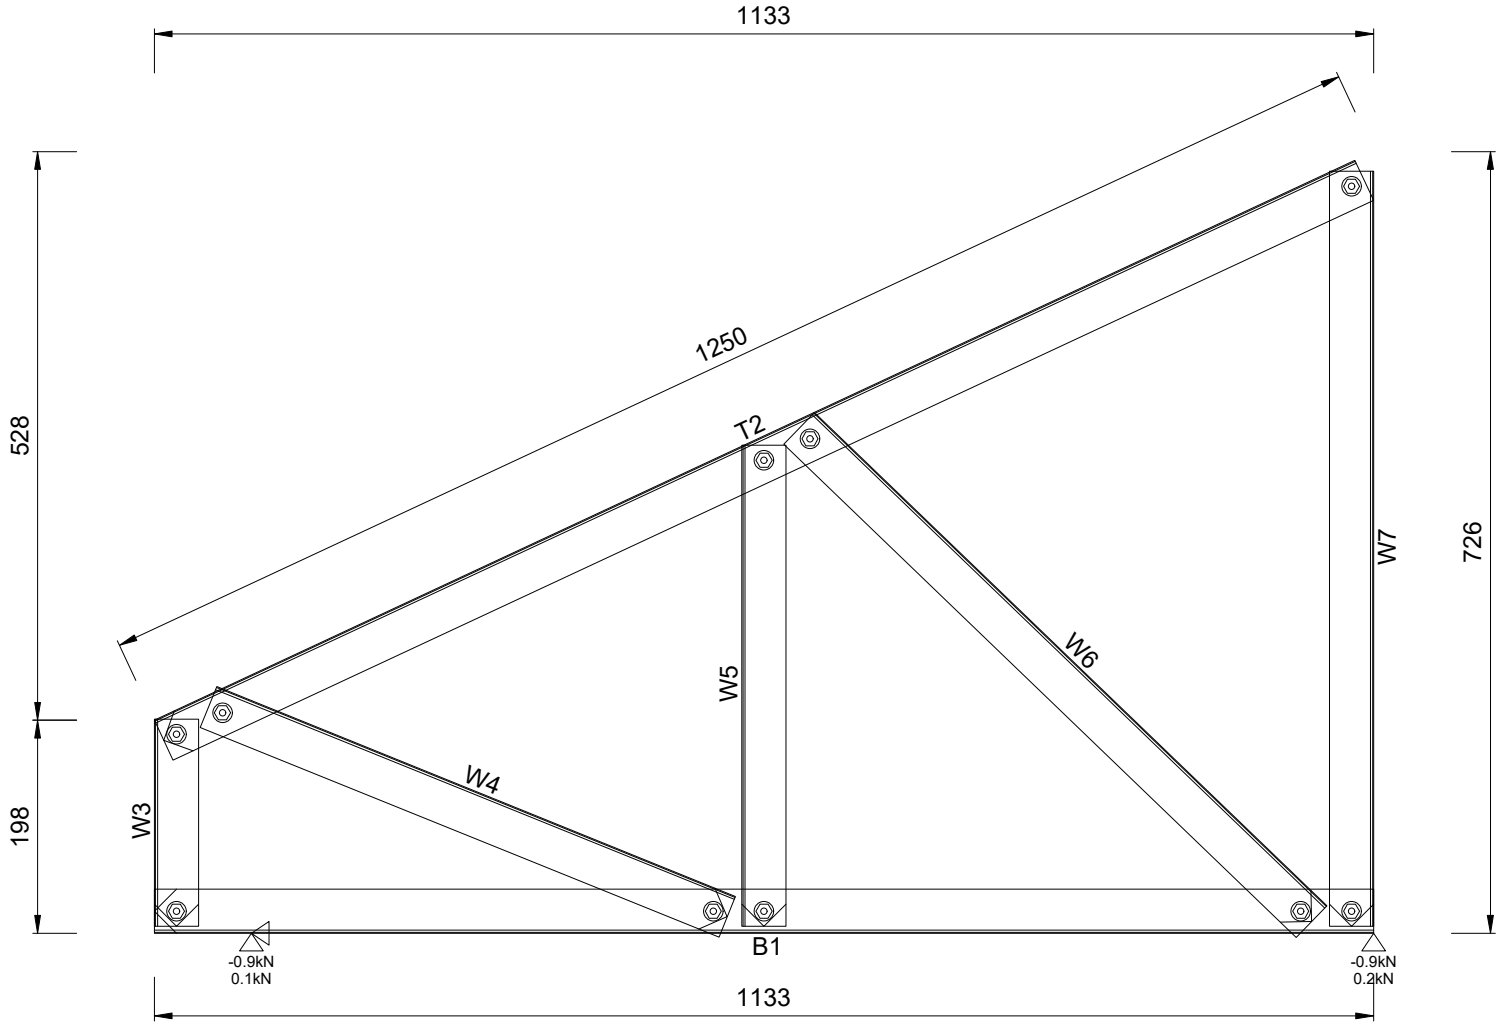


Quantity Required = 1 Mark as HN101 Engineering Status = 29%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	400	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 1132w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	2463	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			7.9kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

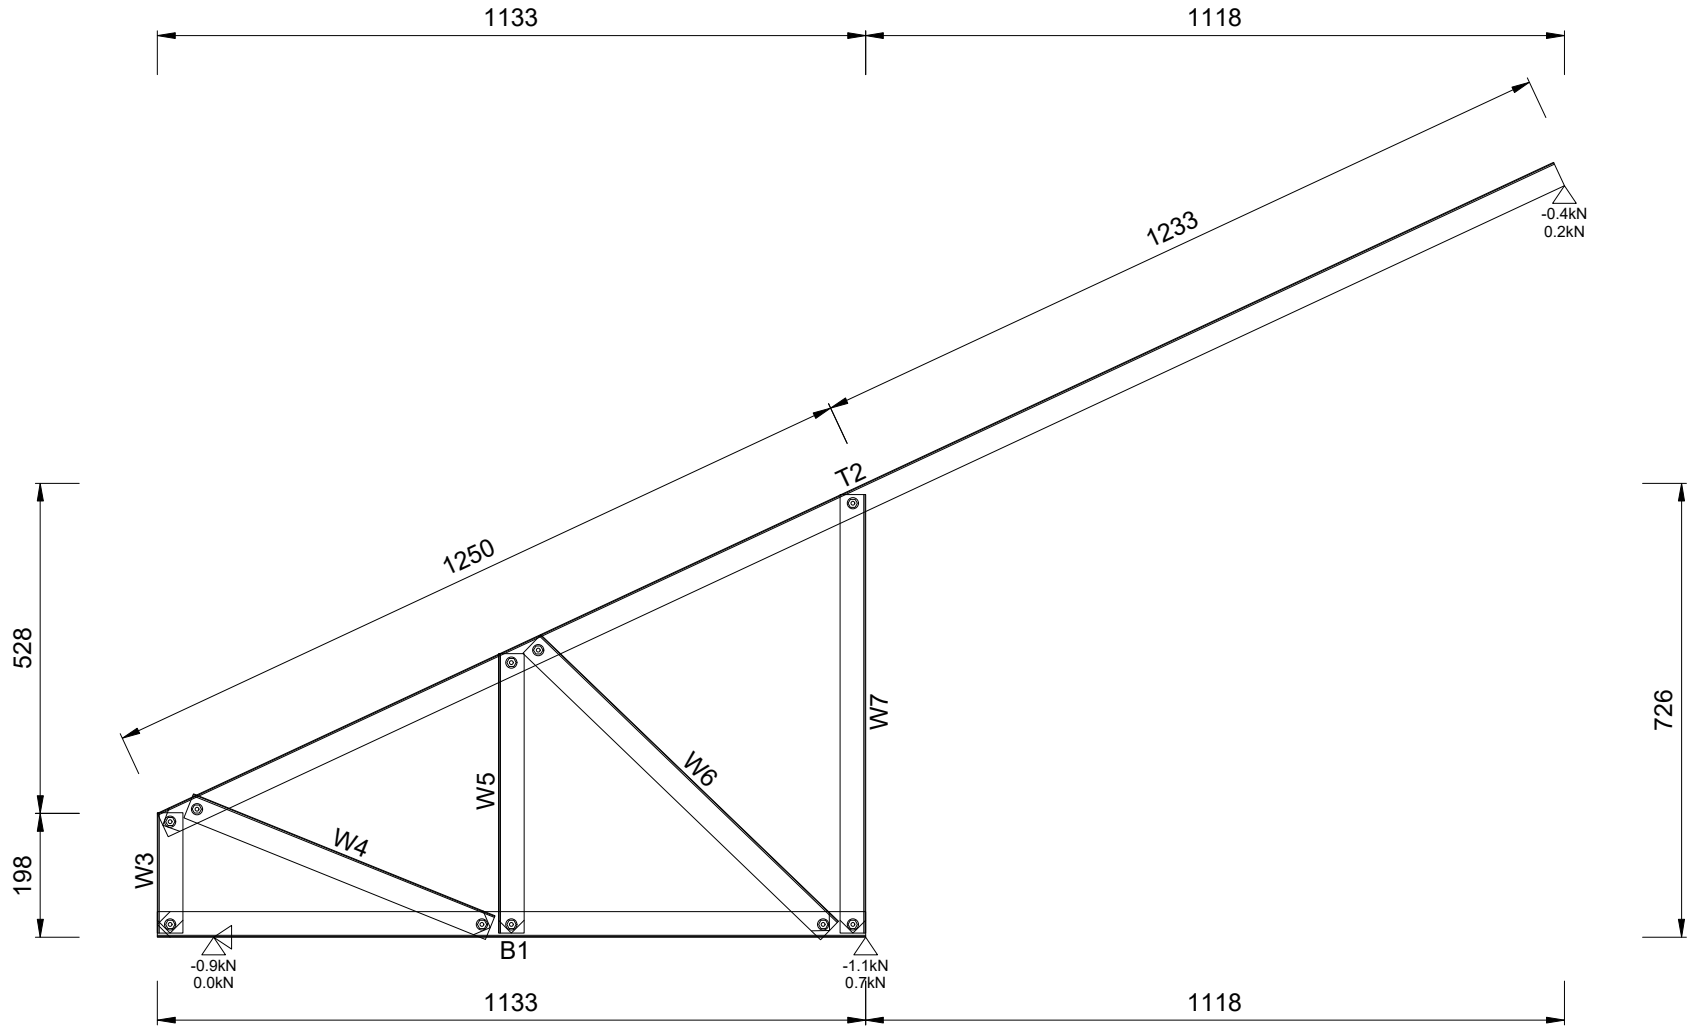


Quantity Required = 1 Mark as HN102 Engineering Status = 61%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1243h x 2250w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	1230	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			6.3kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

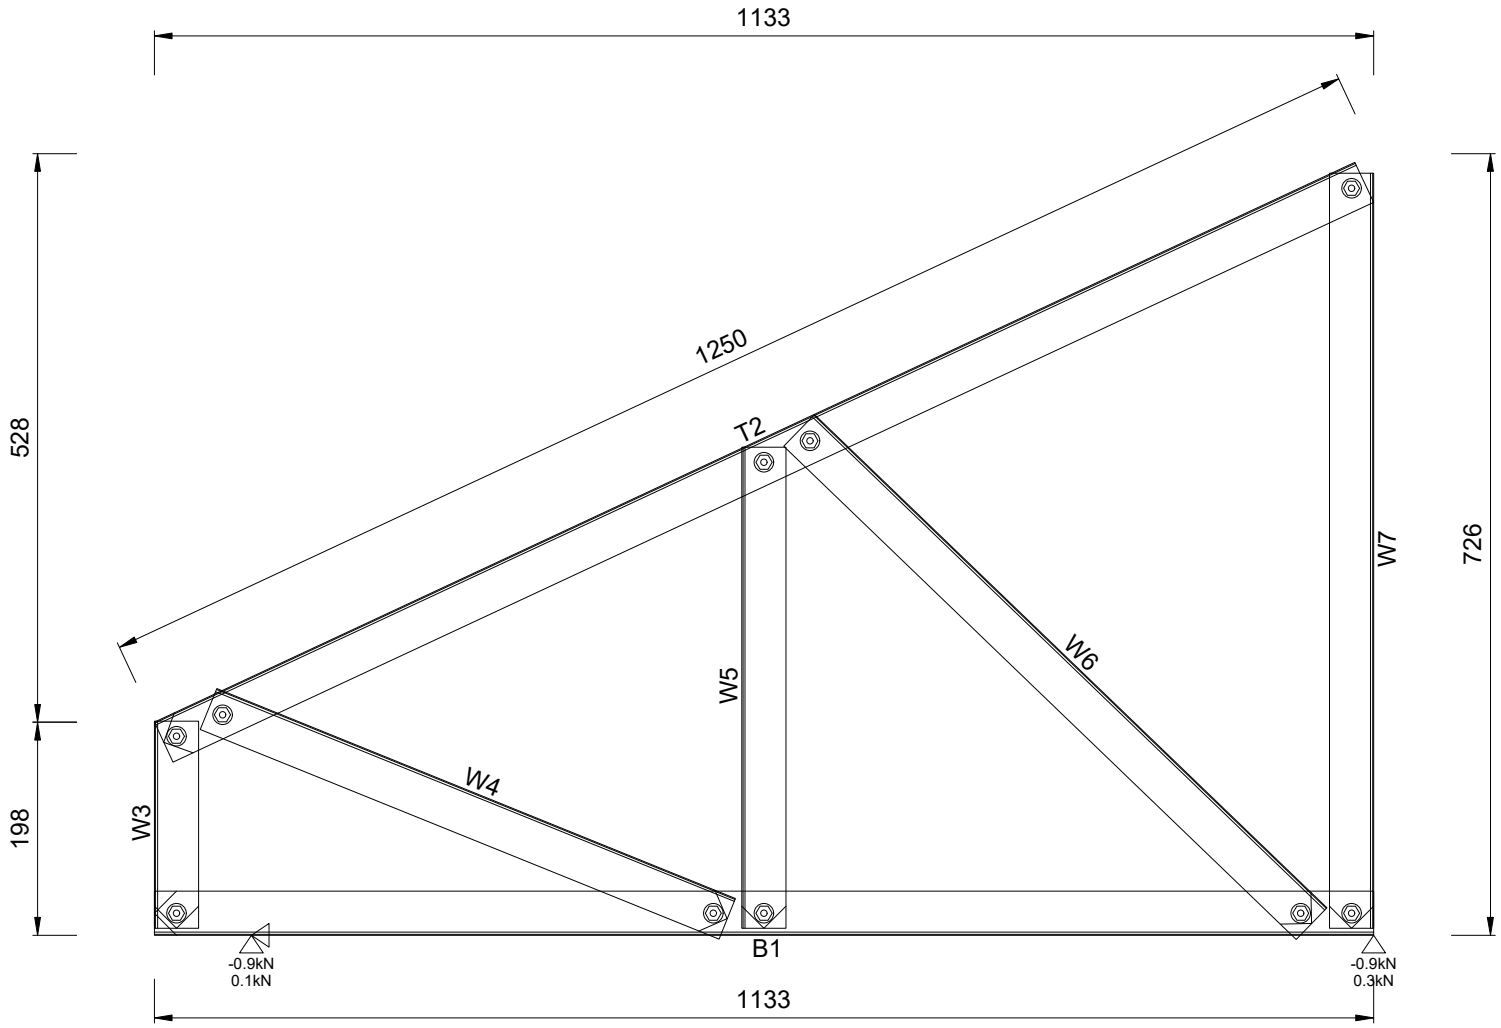


Quantity Required = 1 Mark as HN103 Engineering Status = 29%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 1132w				

B1 75S41-095-550	1	1527	T2 75S41-095-550	1	1594	W3 75S41-095-550	1	191	W4 75S41-095-550	1	703	W5 75S41-095-550	1	436
W6 75S41-095-550	1	804	W7 75S41-095-550	1	680	FRAMECAD M6 Screw	20		Working Sheet: 220_75 TRUSSES			Assembly Weight		7.7kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

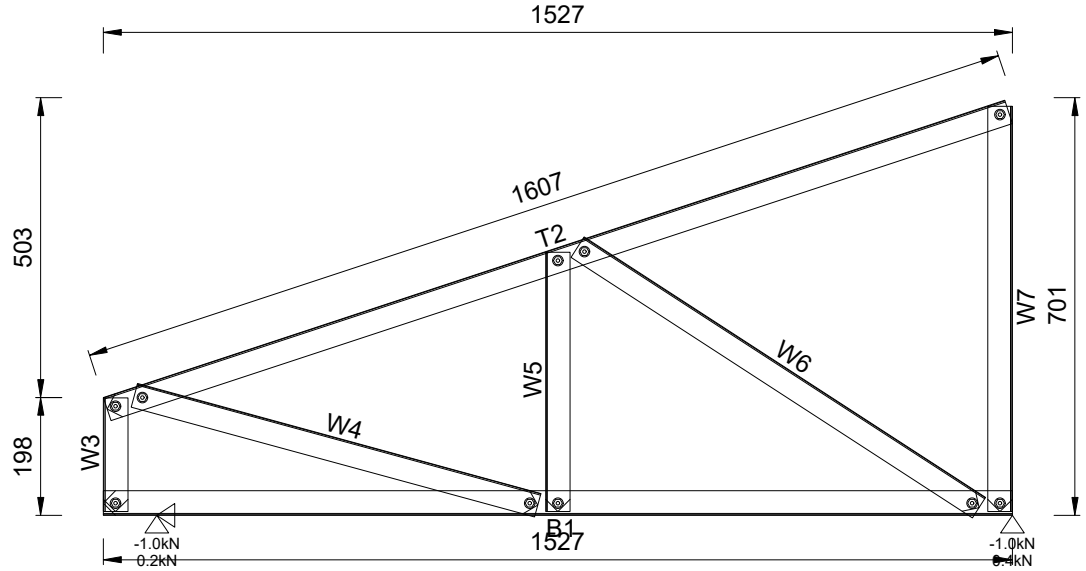


Quantity Required = 1 Mark as HN104 Engineering Status = 39%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	18.249	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	701h x 1527w				

B1 75S41-095-550	1	1527	T2 75S41-095-550	1	1594	W3 75S41-095-550	1	191	W4 75S41-095-550	1	703	W5 75S41-095-550	1	436
W6 75S41-095-550	1	804	W7 75S41-095-550	1	680	FRAMECAD M6 Screw	20		Working Sheet: 220_75 TRUSSES			Assembly Weight		7.7kg

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

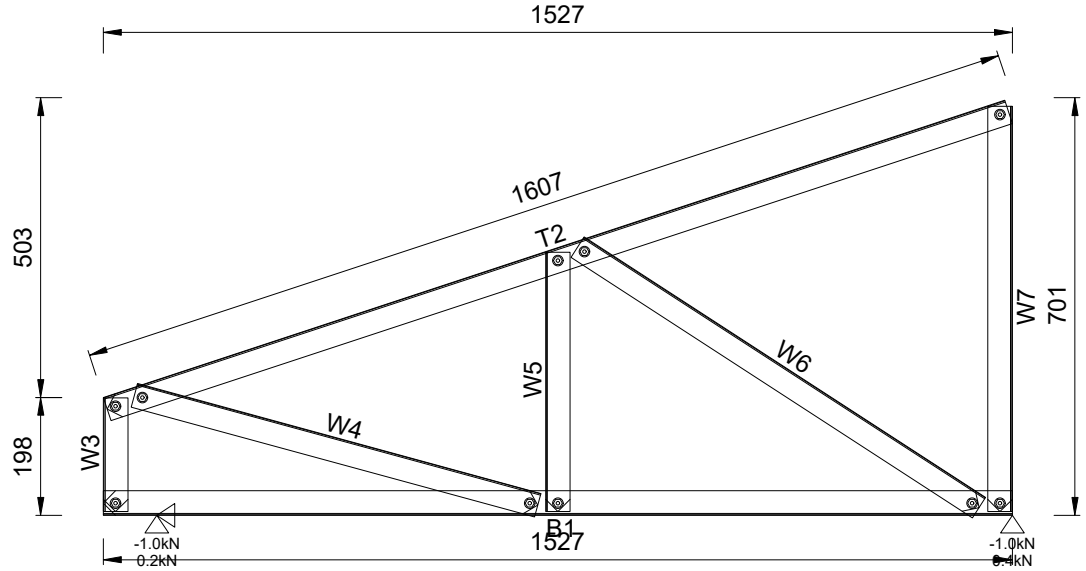


Quantity Required = 1 Mark as HN104 Engineering Status = 39%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	18.249	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	701h x 1527w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	1230	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			6.3kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

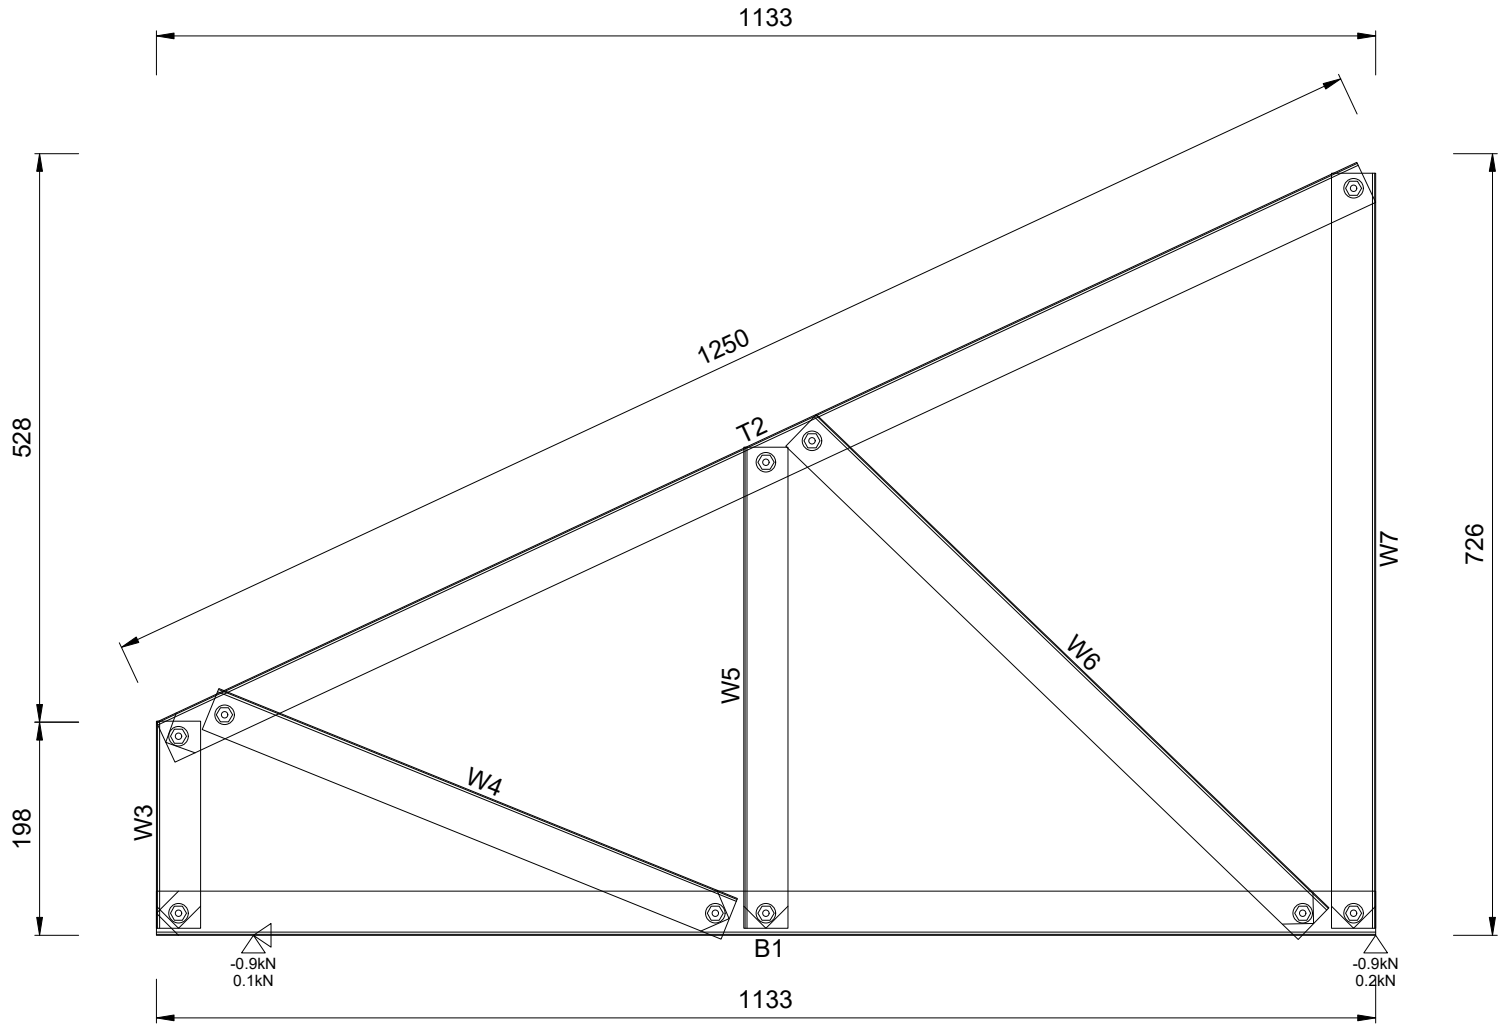


Quantity Required = 1 Mark as HN105 Engineering Status = 29%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	400	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 1133w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	2463	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			7.9kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

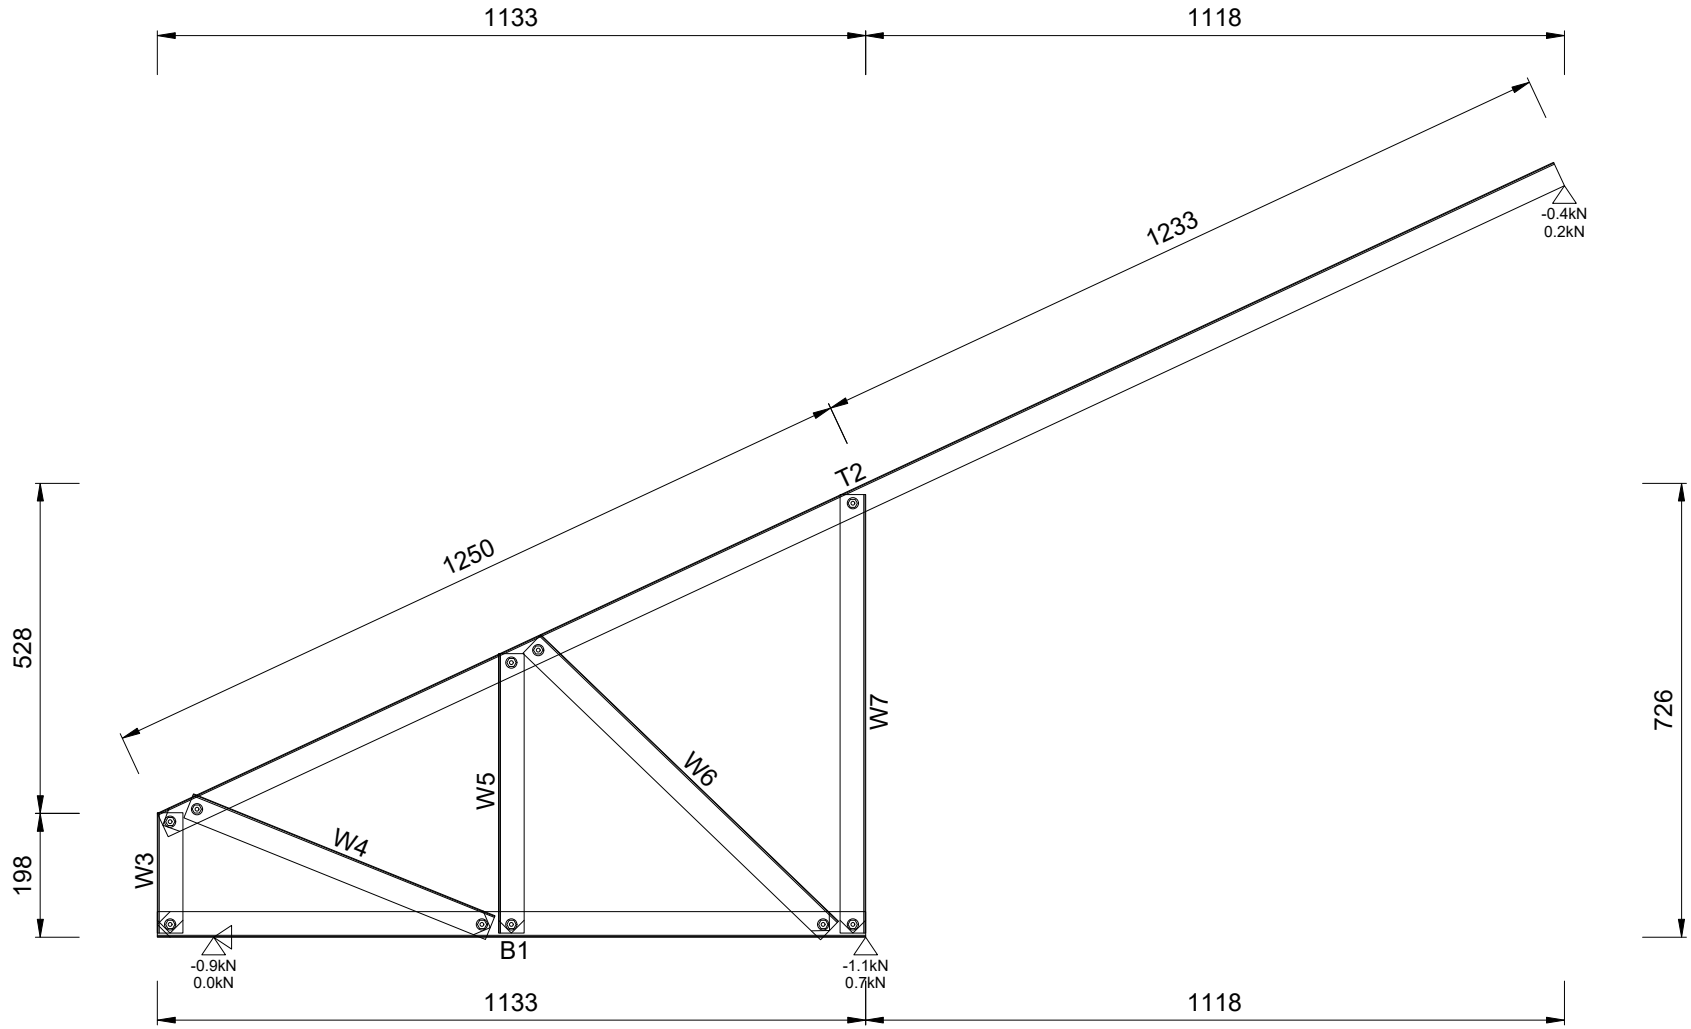


Quantity Required = 1 Mark as HN106 Engineering Status = 61%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	1243h x 2250w				

B1	75S41-095-550	1	1132	T2	75S41-095-550	1	1230	W3	75S41-095-550	1	192
W4	75S41-095-550	1	520	W5	75S41-095-550	1	447	W6	75S41-095-550	1	661
W7	75S41-095-550	1	701	FRAMECAD M6 Screw		20		Working Sheet: 220_75 TRUSSES			
Assembly Weight			6.3kg								

Powered by FRAMECAD Structure ®

Minimum number of fasteners required is 2 per joint

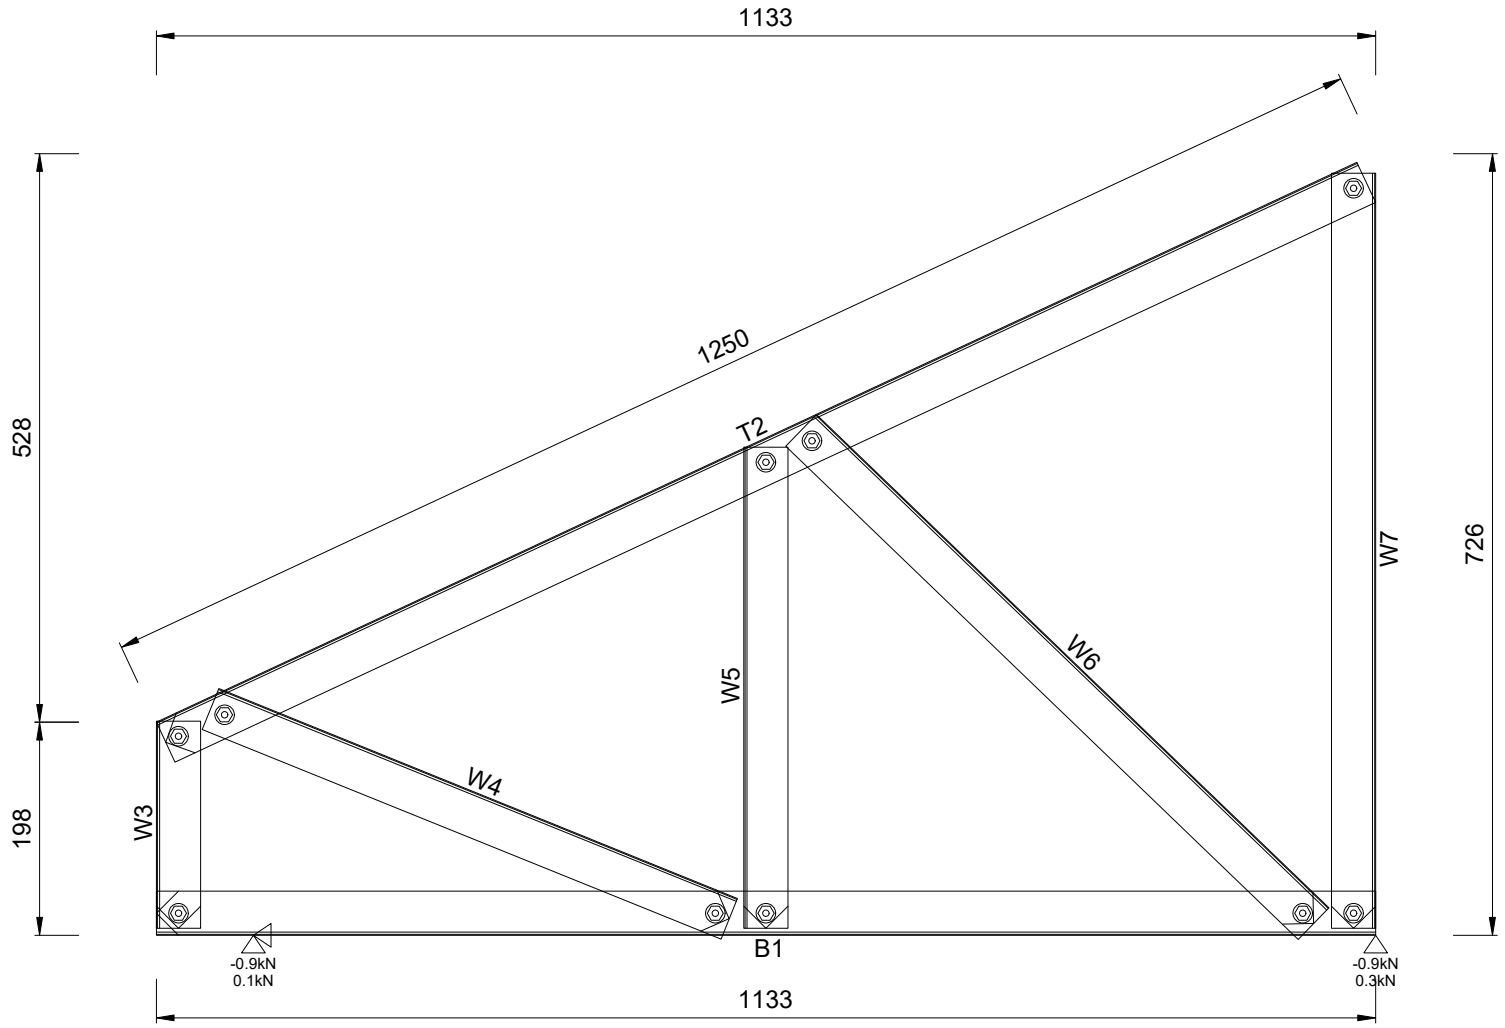

Quantity Required = 1 Mark as HN107 Engineering Status = 29%

System Name:	FC_AusTruss	Roof Type:	SHEET	Truss Model:	M10 75S41 Wide System	Wind Speed:	N2
Truss Type:	In-plane Truss	Truss Pitch:	25.000	Truss Spacing:	600	Design Code:	AS/NZS 4600:2018
Loading Code:	NASH AS 2010	Material Grade Reduction:	Not Applied	Top Chord Live Load (kPa):	0.25	Top Chord Dead Load (kPa):	0.12
Bottom Chord Dead Load (kPa):	0.14	Envelope:	722h x 1133w				

AUSTRUSS | Dwg: 26382_SIMON'S SHED GOLBURN | View 13 of 13 | Client :Simon's Shed | J/No. 26382