

Assignment - 4

Student Name	Aarthi K
Student Roll Number	73771914101
Maximum Marks	2 Marks

Question-1:

Write a code connection in wokwi for ultrasonic sensor. Whenever distance is less than 100cm send "alert" to ibm cloud and display in device recent events.

Solution:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "4yi0vc"
#define DEVICE_TYPE "nodeMcu"
#define DEVICE_ID "Assignment4"
#define TOKEN "123456789"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/Data/fmt/json";
char topic[] = "iot-2/cmd/home/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
void publishData();

const int trigpin=5;
const int echopin=18;
String command;
String data="";

long duration;
float dist;

void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}
```

```

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void publishData()
{
  digitalWrite(trigpin,LOW);
  digitalWrite(trigpin,HIGH);
  delayMicroseconds(10);
  digitalWrite(trigpin,LOW);
  duration=pulseIn(echopin,HIGH);
}

```

```

dist=duration*speed/2;
if(dist<100){
  String payload = "{\"Normal Distance\":\"";
  payload += dist;
  payload += "\"}";

  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish OK");
  }
}

if(dist>101 && dist<111){
  String payload = "{\"Alert distance\":\"";
  payload += dist;
  payload += "\"}";

  Serial.print("\n");
  Serial.print("Sending payload: ");
  Serial.println(payload);
  if(client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Warning crosses 110cm -- it automaticaly of the loop");
    digitalWrite(led,HIGH);
  }else {
    Serial.println("Publish FAILED");
  }
}


}

}

void callback(char* subscribeTopic, byte* payload, unsigned int payloadLength){
  Serial.print("callback invoked for topic:");
  Serial.println(subscribeTopic);
  for(int i=0; i<payloadLength; i++){
    dist += (char)payload[i];
  }
  Serial.println("data:"+ data3);
  if(data3=="lighton"){
    Serial.println(data3);
    digitalWrite(led,HIGH);
  }
  data3="";
}

```

Output:

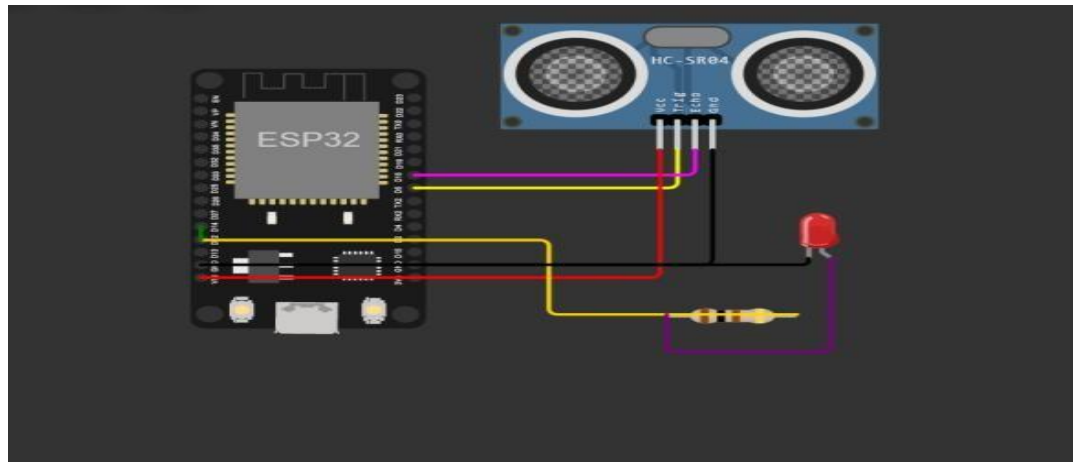

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

Interface: **Recent Events**

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago