




## IBM Cloud output:

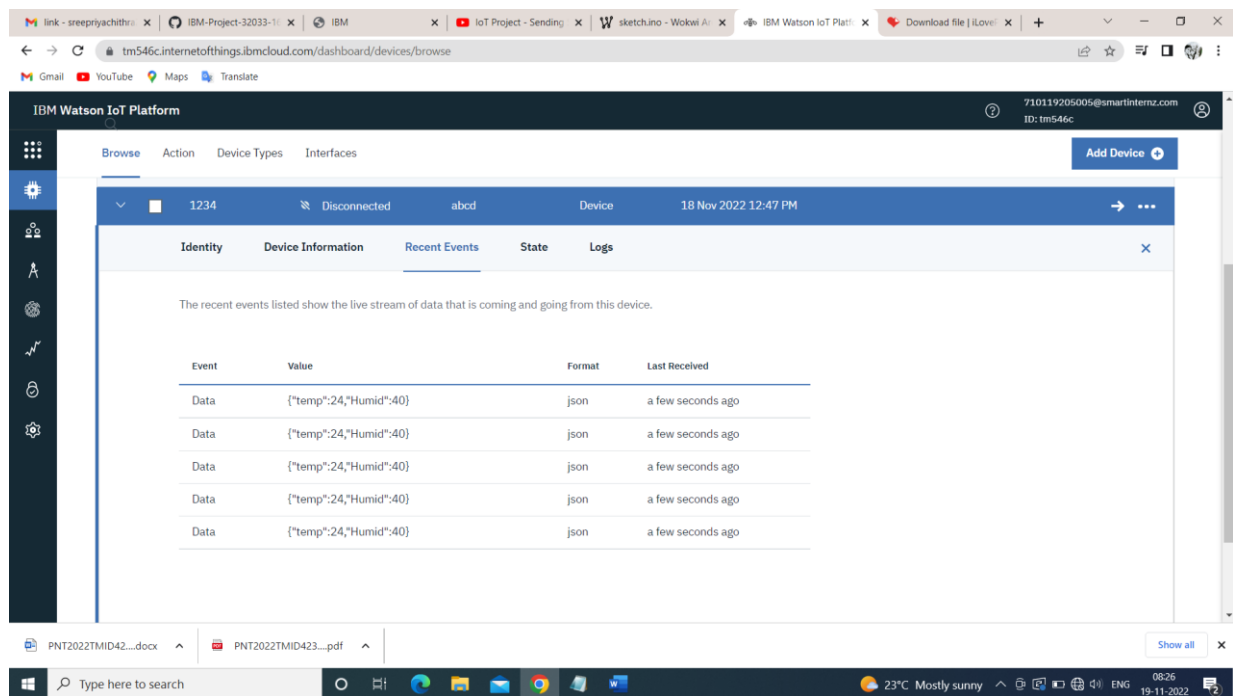

## Program:

```
#include <WiFi.h> //library for wifi
#include <PubSubClient.h> //library for MQTT
#include "DHT.h" // Library for dht11
#define DHTPIN 15 // what pin we're connected to
#define DHTTYPE DHT22 // define type of sensor DHT 11
#define LED 2

DHT dht (DHTPIN, DHTTYPE); // creating the instance by passing pin and type of dht
connected

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength);

//-----credentials of IBM Accounts-----

#define ORG "tm546c" //IBM ORGANITION ID
#define DEVICE_TYPE "abcd" //Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "1234" //Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
float h, t;

//----- Customise the above values -----
char server[] = ORG ".messaging.internetofthings.ibmcloud.com"; // Server Name
char publishTopic[] = "iot-2/evt/Data/fmt/json"; // topic name and type of event perform and
format in which data to be send
```

```

char subscribetopic[] = "iot-2/cmd/command/fmt/String";// cmd REPRESENT command type
AND COMMAND IS TEST OF FORMAT STRING
char authMethod[] = "use-token-auth";// authentication method
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;//client id

```

```
//-----
```

```

WiFiClient wifiClient; // creating the instance for wificlient
PubSubClient client(server, 1883, callback ,wifiClient); //calling the predefined client id by
passing parameter like server id,portand wificredential

```

```
void setup()// configureing the ESP32
```

```

{
  Serial.begin(115200);
  dht.begin();
  pinMode(LED,OUTPUT);
  delay(10);
  Serial.println();
  wificonnect();
  mqttconnect();
}

```

```
void loop()// Recursive Function
```

```

{

  h = dht.readHumidity();
  t = dht.readTemperature();
  Serial.print("temp:");
  Serial.println(t);
  Serial.print("Humid:");
  Serial.println(h);

```

```

  PublishData(t, h);
  delay(1000);
  if (!client.loop()) {
    mqttconnect();
  }
}

```

```
/*.....retrieving to Cloud.....*/
```

```

void PublishData(float temp, float humid) {
  mqttconnect();//function call for connecting to ibm
  /*

```

```

    creating the String in in form JSon to update the data to ibm cloud

```

```

*/
String payload = "{\"temp\":\"";
payload += temp;
payload += "\", \"Humid\":\"";
payload += humid;
payload += "\"}";

Serial.print("Sending payload: ");
Serial.println(payload);

if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");// if it sucessfully upload data on the cloud then it will print
    publish ok in Serial monitor or else it will print publish failed
} else {
    Serial.println("Publish failed");
}

}

void mqttconnect() {
    if (!client.connected()) {
        Serial.print("Reconnecting client to ");
        Serial.println(server);
        while (!!!client.connect(clientId, authMethod, token)) {
            Serial.print(".");
            delay(500);
        }

        initManagedDevice();
        Serial.println();
    }
}

void wificonnect() //function defination for wificonnect
{
    Serial.println();
    Serial.print("Connecting to ");

    WiFi.begin("Wokwi-GUEST", "", 6);//passing the wifi credentials to establish the connection
    while (WiFi.status() != WL_CONNECTED) {
        delay(500);
        Serial.print(".");
    }
    Serial.println("");
    Serial.println("WiFi connected");
    Serial.println("IP address: ");
    Serial.println(WiFi.localIP());
}

```

```

}

void initManagedDevice() {
  if (client.subscribe(subscribetopic)) {
    Serial.println((subscribetopic));
    Serial.println("subscribe to cmd OK");
  } else {
    Serial.println("subscribe to cmd FAILED");
  }
}

void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{

  Serial.print("callback invoked for topic: ");
  Serial.println(subscribetopic);
  for (int i = 0; i < payloadLength; i++) {
    //Serial.print((char)payload[i]);
    data3 += (char)payload[i];
  }
  Serial.println("data: " + data3);
  if(data3=="lighton")
  {
    Serial.println(data3);
    digitalWrite(LED,HIGH);
  }
  else
  {
    Serial.println(data3);
    digitalWrite(LED,LOW);
  }
  data3="";
}

```

## Wokwi Link:

<https://wokwi.com/projects/348719888406151764>