

# Gas Leakage monitoring & Alerting system for Industries

## Assignment-4

Assignment Date	31 October 2022
Student Name	Elphin josnell AS
Student Roll Number	950819106305

Write a code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100cms send an "Alert" to IBM cloud and display in the device recent events.

### Code:

```
#include <WiFi.h>
#include <PubSubClient.h>
void callback(char* subscribetopic, byte* payload, unsigned int
payloadLength);
//-----credentials of IBM Accounts-----
#define ORG "kotoq5"//IBM ORGANITION ID
#define DEVICE_TYPE "ESP32"//Device type mentioned in ibm watson IOT Platform
#define DEVICE_ID "12345"//Device ID mentioned in ibm watson IOT Platform
#define TOKEN "12345678" //Token
String data3;
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
```

```

char publishTopic[] = "iot-2/evt/Data/fmt/json";
char subscribetopic[] = "iot-2/cmd/test/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
WiFiClient wifiClient;
PubSubClient client(server, 1883, callback ,wifiClient);
const int trigPin = 5;
const int echoPin = 18;
#define SOUND_SPEED 0.034
long duration;
float distance;
void setup() {
  Serial.begin(115200);
  pinMode(trigPin, OUTPUT);
  pinMode(echoPin, INPUT);
  wificonnect();
  mqttconnect();
}
void loop()
{
  digitalWrite(trigPin, LOW);
  delayMicroseconds(2);
  digitalWrite(trigPin, HIGH);
  delayMicroseconds(10);
  digitalWrite(trigPin, LOW);
  duration = pulseIn(echoPin, HIGH);
  distance = duration * SOUND_SPEED/2;
  Serial.print("Distance (cm): ");
  Serial.println(distance);
  if(distance<100)
  {

```

```
Serial.println("ALERT!!");
delay(1000);
PublishData(distance);
delay(1000);
if (!client.loop()) {
  mqttconnect();
}
}
delay(1000);
}
void PublishData(float dist) {
  mqttconnect();
  String payload = "{\"Distance\":\"";
  payload += dist;
  payload += "\",\"ALERT!!\":\"\"Distance less than 100cms\"";
  payload += "\"}";
  Serial.print("Sending payload: ");
  Serial.println(payload);

  if (client.publish(publishTopic, (char*) payload.c_str())) {
    Serial.println("Publish ok");
  } else {
    Serial.println("Publish failed");
  }
}
void mqttconnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting client to ");
    Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
  }
}
```

```

}
initManagedDevice();
Serial.println();
}
}
void wificonnect()
{
Serial.println();
Serial.print("Connecting to ");
WiFi.begin("Wokwi-GUEST", "", 6);
while (WiFi.status() != WL_CONNECTED) {
delay(500);
Serial.print(".");
}
Serial.println("");
Serial.println("WiFi connected");
Serial.println("IP address: ");
Serial.println(WiFi.localIP());
}
void initManagedDevice() {
if (client.subscribe(subscribetopic)) {
Serial.println((subscribetopic));
Serial.println("subscribe to cmd OK");
} else {
Serial.println("subscribe to cmd FAILED");
}
}
void callback(char* subscribetopic, byte* payload, unsigned int payloadLength)
{
Serial.print("callback invoked for topic: ");
Serial.println(subscribetopic);
for (int i = 0; i < payloadLength; i++) {

```


```
//Serial.print((char)payload[i]);
data3 += (char)payload[i];
}
Serial.println("data: "+ data3);
data3="";
}
```

**Diagram.json:**

```
{
  "version":1,
  "author":
  "sweety", "editor":
  "wokwi", "parts": [
    { "type":"wokwi-esp32-devkit-v1", "id":"esp", "top":-4.67, "left":-114.67, "attrs":{}},
    { "type":"wokwi-hc-sr04", "id":"ultrasonic1", "top":15.96, "left":89.17, "attrs":{}}
  ],
  "connections":[
    ["esp:TX0", "$serialMonitor:RX", "", []],
    ["esp:RX0", "$serialMonitor:TX", "", [] ], [
      "esp:VIN", "ultrasonic1:
      VCC", "red",
      ["h-37.16", "v-178.79", "h200", "v173.33", "h100.67"]
    ],
    ["esp:GND.1", "ultrasonic1:GND", "black", ["h39.87", "v44.04", "h170"]],
    ["esp:D5", "ultrasonic1:TRIG", "green", ["h54.54", "v85.07", "h130.67"]],
    ["esp:D18", "ultrasonic1:ECHO", "green", ["h77.87", "v80.01", "h110"]]
```

```
}  
]
```

### Circuit Diagram:

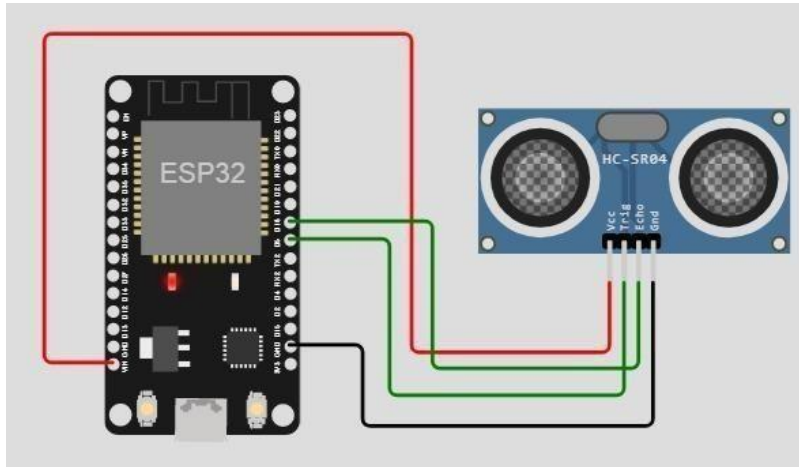

### Output:

Wokwioutput:

```
Connecting to ....  
WiFi connected  
IP address:  
10.10.0.2  
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com  
iot-2/cmd/test/fmt/String  
subscribe to cmd OK  
  
Distance (cm): 399.92  
Distance (cm): 399.96  
Distance (cm): 399.94  
Distance (cm): 399.98  
Distance (cm): 399.94  
Distance (cm): 399.92  
Distance (cm): 399.94
```

