

## ASSIGNMENT – 4

### Ultrasonic sensor simulation in Wokwi

Assignment Date	25 October 2022
Student Name	Mugundhan
Student Roll Number	713519CECS026
Maximum Marks	2 Marks
Team ID	PNT2022TMID07742
Project Name	IoT Based Safety Gadget for Child Safety Monitoring and Notification

#### QUESTIONS:

Write code and connections in wokwi for the ultrasonic sensor. Whenever the distance is less than 100 CMS send an "alert" to the IBM cloud and display in the device recent events

#### CODE:

```
#include <WiFi.h>
#include <PubSubClient.h>
WiFiClient wifiClient;
String data3;
#define ORG "3yngbh"
#define DEVICE_TYPE "Assignment"
#define DEVICE_ID "1234"
#define TOKEN "234567890"
#define speed 0.034
#define led 14
char server[] = ORG ".messaging.internetofthings.ibmcloud.com";
char publishTopic[] = "iot-2/evt/shreedharen/fmt/json";
char topic[] = "iot-2/cmd/led/fmt/String";
char authMethod[] = "use-token-auth";
char token[] = TOKEN;
char clientId[] = "d:" ORG ":" DEVICE_TYPE ":" DEVICE_ID;
PubSubClient client(server, 1883, wifiClient);
```

```
const int trigpin=5;
const int echopin=18;
String command;
String data="";
```

```
long duration;
```

float dist;

```

void setup()
{
  Serial.begin(115200);
  pinMode(led, OUTPUT);
  pinMode(trigpin, OUTPUT);
  pinMode(echopin, INPUT);
  wifiConnect();
  mqttConnect();
}

void loop() {
  bool isNearby = dist < 100;
  digitalWrite(led, isNearby);

  publishData();
  delay(500);

  if (!client.loop()) {
    mqttConnect();
  }
}

void wifiConnect() {
  Serial.print("Connecting to "); Serial.print("Wifi");
  WiFi.begin("Wokwi-GUEST", "", 6);
  while (WiFi.status() != WL_CONNECTED) {
    delay(500);
    Serial.print(".");
  }
  Serial.print("WiFi connected, IP address: "); Serial.println(WiFi.localIP());
}

void mqttConnect() {
  if (!client.connected()) {
    Serial.print("Reconnecting MQTT client to "); Serial.println(server);
    while (!client.connect(clientId, authMethod, token)) {
      Serial.print(".");
      delay(500);
    }
    initManagedDevice();
    Serial.println();
  }
}

void initManagedDevice() {
  if (client.subscribe(topic)) {
    // Serial.println(client.subscribe(topic));
    Serial.println("IBM subscribe to cmd OK");
  }
}

```

```

    } else {
        Serial.println("subscribe to cmd FAILED");
    }
}
void publishData()
{
    digitalWrite(trigpin,LOW);
    digitalWrite(trigpin,HIGH);
    delayMicroseconds(10);
    digitalWrite(trigpin,LOW);
    duration=pulseIn(echopin,HIGH);
    dist=duration*speed/2;
    if(dist<100){
        String payload = "{\"Alert Distance\":";
        payload += dist;
        payload += "}";

        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if (client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }

    }
    if(dist>100){
        String payload = "{\"Distance\":";
        payload += dist;
        payload += "}";




        Serial.print("\n");
        Serial.print("Sending payload: ");
        Serial.println(payload);
        if(client.publish(publishTopic, (char*) payload.c_str())) {
            Serial.println("Publish OK");
        }else {
            Serial.println("Publish FAILED");
        }

    }

}
}

```


## .json CODE:

```
WOKWI  SAVE  SHARE 
```

```
sketch.ino  diagram.json ●  libraries.txt  Library Manager ▼
```

```
1  {
2    "version": 1,
3    "author": "Mugundhan",
4    "editor": "wokwi",
5    "parts": [
6      { "type": "wokwi-esp32-devkit-v1", "id": "esp", "top": 92.67, "left": 45.33, "attrs":
7        {
8          "type": "wokwi-hc-sr04",
9          "id": "ultrasonic1",
10         "top": 60.71,
11         "left": 185.64,
12         "attrs": { "distance": "139" }
13       }
14     ],
15     "connections": [
16       [ "esp:TX0", "$serialMonitor:RX", "", [ ] ],
17       [ "esp:RX0", "$serialMonitor:TX", "", [ ] ],
18       [ "ultrasonic1:TRIG", "esp:D5", "yellow", [ "v0" ] ],
19       [ "ultrasonic1:ECHO", "esp:D18", "magenta", [ "v0" ] ],
20       [ "ultrasonic1:VCC", "esp:VIN", "red", [ "v0" ] ],
21       [ "ultrasonic1:GND", "esp:GND.1", "black", [ "v0" ] ],
22       [ "esp:D12", "esp:D14", "green", [ "h0" ] ]
23     ]
24   }
```

## CIRCUIT DIAGRAM:

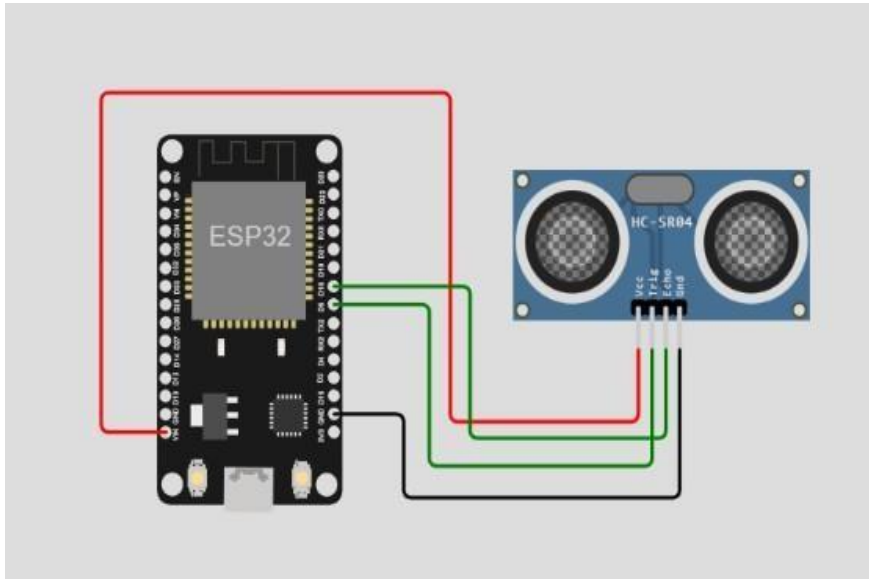

**Wokwi simulation link:**


<https://wokwi.com/projects/347831540413104724>

## WOKWI OUTPUT:

```
Connecting to ....
WiFi connected
IP address:
10.10.0.2
Reconnecting client to ytluse.messaging.internetofthings.ibmcloud.com
iot-2/cmd/test/fmt/String
subscribe to cmd OK

Distance (cm): 399.92
Distance (cm): 399.96
Distance (cm): 399.94
Distance (cm): 399.98
Distance (cm): 399.94
Distance (cm): 399.92
Distance (cm): 399.94
```

## IBM CLOUD OUTPUT:

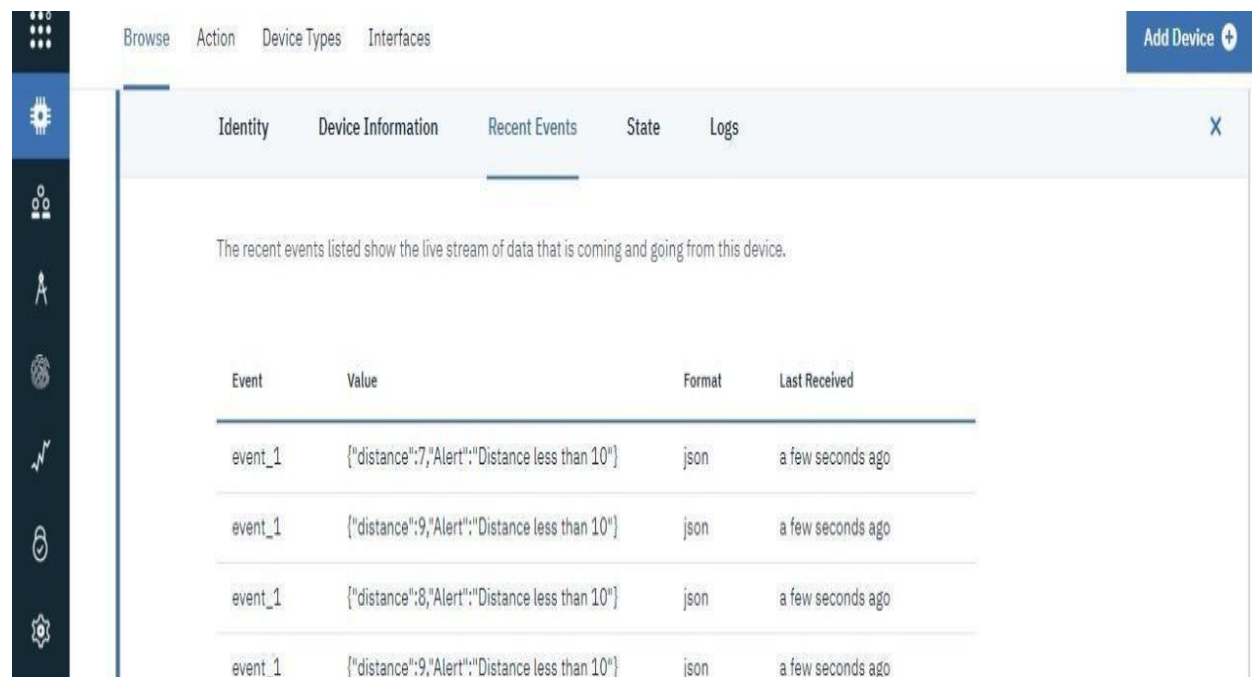

The screenshot displays the IBM Cloud IoT Platform interface. On the left is a dark sidebar with various icons. The top navigation bar includes 'Browse', 'Action', 'Device Types', and 'Interfaces', along with an 'Add Device' button. The main content area is titled 'Recent Events' and contains a table of device data.

The recent events listed show the live stream of data that is coming and going from this device.

Event	Value	Format	Last Received
event_1	{"distance":7,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":8,"Alert":"Distance less than 10"}	json	a few seconds ago
event_1	{"distance":9,"Alert":"Distance less than 10"}	json	a few seconds ago